National Library of Canada
Bibliothèque nationale du Canada

Canadian Theses Service
Service des thèses canadiennes

Ottawa, Canada
K1A 0N4

NOTICE

The quality of this microform is heavily dependent upon the quality of the original thesis submitted for microfilming. Every effort has been made to ensure the highest quality of reproduction possible.

If pages are missing, contact the university which granted the degree.

Some pages may have indistinct print especially if the original pages were typed with a poor typewriter ribbon or if the university sent us an inferior photocopy.

Previously copyrighted materials (journal articles, published tests, etc.) are not filmed.

Reproduction in full or in part of this microform is governed by the Canadian Copyright Act, R.S.C. 1970, c. C-30.

AVIS

La qualité de cette microforme dépend grandement de la qualité de la thèse soumise au microfilmage. Nous avons tout fait pour assurer une qualité supérieure de reproduction.

S'il manque des pages, veuillez communiquer avec l'université qui a conféré le grade.

La qualité d'impression de certaines pages peut laisser à désirer, surtout si les pages originales ont été dactylographiées à l'aide d'un ruban usé ou si l'université nous a fait parvenir une photocopie de qualité inférieure.

Les documents qui font déjà l'objet d'un droit d'auteur (articles de revue, tests publiés, etc.) ne sont pas microfilmés.

La reproduction, même partielle, de cette microforme est soumise à la Loi canadienne sur le droit d'auteur, SRC 1970, c. C-30.

NL-339 (r. 88/04)

Canada

THE UNIVERSITY OF ALBERTA

Synoptic Study of Two Intense, Cold-core Cyclonic Storms

by

© Chi Dinh Nguyen

A THESIS

SUBMITTED TO THE FACULTY OF GRADUATE STUDIES AND RESEARCH

IN PARTIAL FULFILMENT OF THE REQUIREMENTS FOR THE DEGREE

OF Master of Science

IN

Meteorology

Department of Geography

EDMONTON, ALBERTA

Fall 1987

Permission has been granted to the National Library of Canada to microfilm this thesis and to lend or sell copies of the film.

The author (copyright owner) has reserved other publication rights, and neither the thesis nor extensive extracts from it may be printed or otherwise reproduced without his/her written permission.

L'autorisation a été accordée à la Bibliothèque nationale du Canada de microfilmer cette thèse et de prêter ou de vendre des exemplaires du film.

L'auteur (titulaire du droit d'auteur) se réserve les autres droits de publication; ni la thèse ni de longs extraits de celle-ci ne doivent être imprimés ou autrement reproduits sans son autorisation écrite.

ISBN 0-315-40977-0

THE UNIVERSITY OF ALBERTA

RELEASE FORM

NAME OF AUTHOR Chi Dinh Nguyen

TITLE OF THESIS Synoptic Study of Two Intense, Cold-core Cyclonic Storms

DEGREE FOR WHICH THESIS WAS PRESENTED Master of Science

YEAR THIS DEGREE GRANTED Fall 1987

Permission is hereby granted to THE UNIVERSITY OF ALBERTA LIBRARY to reproduce single copies of this thesis and to lend or sell such copies for private, scholarly or scientific research purposes only.

The author reserves other publication rights, and neither the thesis nor extensive extracts from it may be printed or otherwise reproduced without the author's written permission.

(SIGNED) .....

PERMANENT ADDRESS:

Box 829 SUB P.O #11

EDMONTON, ALBERTA

T6G 2E0 CANADA

DATED 7 October 1987

THE UNIVERSITY OF ALBERTA

FACULTY OF GRADUATE STUDIES AND RESEARCH

The undersigned certify that they have read, and recommend to the Faculty of Graduate Studies and Research, for acceptance, a thesis entitled Synoptic Study of Two Intense, Cold-core Cyclonic Storms submitted by Chi Dinh Nguyen in partial fulfilment of the requirements for the degree of Master of Science in Meteorology.

E R Reinelt
.....

Supervisor

Robert E. Elliott
.....

Walter Jones
.....

Date 7 October 1987

Dedication

To my parents, neither time nor distance could lessen their loving support.

and

To Nguyệt Trần, Dũng and Chương with love.

Abstract

Two major storms which brought heavy precipitation to wide sections of Alberta in May and July, 1986 are described and illustrated by means of maps, satellite images and radar scans. Both storms originated in cold lows from the North Pacific which, on reaching Alberta, produced vigorous lee cyclogenesis at the surface.

Though different in the initial development, both storms subsequently produced copious amounts of rain and snow in Western Alberta, and lesser amounts in the eastern districts.

On the basis of the evidence studied and presented, it is postulated that the heavy precipitation was caused by synoptic-scale, deep-upslope flow, generated and maintained in the easterly circulation to the north of the centre of the cold-low system.

Acknowledgement

I would like to express my heartfelt gratitude to Dr. E.R. Reinelt, my departmental supervisor. His time, warm guidance, advice and encouragement through the course of the preparation of this thesis are greatly appreciated; it would have been impossible to complete it without him.

Appreciation is also extended to Dr. R.B. Charlton, of the Meteorology Division, and to Dr. F.W. Jones of the Department of Physics who, with Dr. Reinelt, served on my examing committee.

I wish to extend my appreciation to Dr. E.P. Lozowski for his kindness and help whenever I needed it.

Special thanks are extended to Dennis Oracheski who made numerous useful comments on the satellite meteorology used in this study. Thanks are also due to Mr. Dave Burnett and the staff at the Alberta Weather Centre for much help and the use of their materials.

I am also indebted to Mr. P.I. Buttuls at Computing Services for his time and invaluable help.

Finally, my thanks to Ron Goodson at A.E.S., friends and the staff at the Division of Meteorology who were always ready to help when I needed them.

Table of Contents

Chapter — Page

1. INTRODUCTION, INSTRUMENTATION AND OBSERVATION 1

1.1 Introduction 1

1.2 Instrumentation and observation 1

1.2.1 The NOAA Satellite System 1

1.2.2 Satellite Scanning 5

1.2.3 Satellite Resolution 7

1.2.4 Calibration of Infrared Data 9

1.3 Radar 13

1.3.1 Fundamentals of Radar 13

1.3.2 Major Components of Radar 13

1.3.3 Radar Wavelengths 17

1.3.4 Beam Width 18

1.3.5 Characteristics of The CWSR-81 Radar System 19

1.4 Conventional Surface and Upper-air Weather Maps 20

2. SELECTING AND ANALYSING DATA 21

2.1 Introduction 21

2.2 Source and treatment of Data 21

2.2.1 Synoptic Data 21

2.2.2 Storm tracks 23

2.2.3 Satellite Data 23

2.2.4 Precipitation 24

3. CASE STUDY #1 : THE SPRING SNOW STORM OF MAY, 1986 33

3.1 Introduction 33

3.2 Synoptic Description 33

3.2.1 May 13, 1986 33

3.2.2 May 14, 1986 42

3.2.3 May 15, 1986 50
3.2.4 May 16, 1986 57
3.3 Numerical Analysis and Graphical Display of Satellite Imagery 64
3.3.1 May 13, 1986 66
3.3.2 May 14, 1986 72
3.3.3 May 15, 1986 77
3.3.4 May 16, 1986 81
4. CASE STUDY #2 : HEAVY RAIN STORM OF JULY, 1986 85
4.1 Introduction 85
4.2 Synoptic Description 85
4.2.1 July 16, 1986 85
4.2.2 July 17, 1986 92
4.2.3 July 18, 1986 100
4.3 Numerical Analysis and Graphical Display of the July Storm 107
4.3.1 July 16, 1986 107
4.3.2 July 17, 1986 112
4.3.3 July 18, 1986 118
4.4 Radar History of the July Storm 122
5. DISCUSSION AND SYNTHESIS 132
Bibliography 135
APPENDIX A 138
APPENDIX B 139
APPENDIX C 140
APPENDIX D 174

List of Tables

Table		Page
1.1	NOAA-9 AVHRR Channel Characteristics.	5
1.2	APT linearization regions.	6
1.3	DVIP Precipitation Rate (mm/hr) Level.	17
1.4	Radar bands, wavelengths, most popular wavelengths and their primary uses.	18
1.5	Characteristics of The CWSR-81 system.	19
2.1	Stations with 40 mm of precipitation (water equivalent) or more over 48 hours on May 13 and 14, 1986.	25
2.2	24-hour precipitation amounts for July 17, 1986 and comparable 24-hour precipitation records.	26

List of Figures

Figure		Page
1.1	The spacecraft in space.	2
1.2	The main parts of the NOAA-9 vehicle.(after Schwalb, 1982)	3
1.3	The equator crossing time geometry of NOAA-9.	4
1.4	APT linearization regions and resolution.(after Schwalb, 1978)	7
1.5	Example of one scanline of NOAA-9 APT data.	8
1.6	APT frame format.(after Schwalb, 1978)	9
1.7	The relationship between received digital counts and wedge levels.	10
1.8	Calibration temperature curve for Case Study # 1.	12
1.9	Calibration temperature curve for Case Study # 2.	12
1.10	An elementary Radar System.	14
1.11	The main components of a Radar System.	14
1.12	PPI radar scan on July 17, 1986, 1343Z at elevation 3°.	16
1.13	The Antenna Beam Width Pattern of a Radar System.	19
2.1	The area of study of the spring snow storm of May, and the heavy summer rainfall of July, 1986.	22
2.2	12-hour interval track positions of the 500-mb low of the spring storm, from 1200Z May 12 to 1200Z May 16, 1986.	27
2.3	The track of the Surface low of the spring storm from 0000Z May 13 to 1200Z May 16, 1986.	28
2.4	12-hour interval track positions of the 500-mb low of the July rain storm, from 1200Z July 16 to 1200Z July 18, 1986.	29
2.5	48-hour precipitation totals of the May, 1986, snow storm (from 13/1800Z to 15/1800Z).	30
2.6	24-hour precipitation totals of the July, 1986, rain storm (from 17/1800Z to 18/1800Z).	31
2.7	Radar scan of heavy precipitation	32
2.8	Detail of radar scan of bands of heavy precipitation	32
3.1	500-mb map for 1200Z May 12, 1986.	35
3.2	500-mb map for 0000Z May 13, 1986.	36

Figure		Page
3.3	500-mb map for 1200Z May 13, 1986.	37
3.4	Surface Analysis map for 0000Z May 13, 1986.	38
3.5	Surface Analysis map for 1200Z May 13, 1986.	39
3.6	Infrared Image of May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299.	40
3.7	Visible Image of May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299.	41
3.8	500-mb map for 0000Z May 14, 1986.	44
3.9	500-mb map for 1200Z May 14, 1986.	45
3.10	Surface Analysis map for 0000Z May 14, 1986.	46
3.11	Surface Analysis map for 1200Z May 14, 1986.	47
3.12	Infrared Image of May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313.	48
3.13	Visible Image of May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313.	49
3.14	500-mb map for 0000Z May 15, 1986.	51
3.15	500-mb map for 1200Z May 15, 1986.	52
3.16	Surface Analysis map for 0000Z May 15, 1986.	53
3.17	Surface Analysis map for 1200Z May 15, 1986.	54
3.18	Infrared Image of May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327.	55
3.19	Visible Image of May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327.	56
3.20	500-mb map for 0000Z May 16, 1986.	58
3.21	500-mb map for 1200Z May 16, 1986.	59
3.22	Surface Analysis map for 0000Z May 16, 1986.	60
3.23	Surface Analysis map for 1200Z May 16, 1986.	61
3.24	Infrared Image of May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341.	62
3.25	Visible Image of May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341.	63
3.26	IR-derived isotherms for May 13, 1986 at 2047-2102Z	68
3.27	Brightness isopleths for May 13, 1986 at 2047-2102Z	69
3.28	IR-derived 3 Dimensional temperature field of the cold-low area (49-53°N, 107-115°W) for May 13, 1986 at 2047-2102Z	70

Figure		Page
3.29	Radiosonde at Edmonton Stony Plain (WSE) at 0000Z May 14, 1986 (close to the time of satellite pass 7299).	71
3.30	IR-derived isotherms for May 14, 1986 at 2036-2051Z	73
3.31	Brightness isopleths for May 14, 1986 at 2036-2051Z	74
3.32	IR-derived 3 Dimensional temperature field of the cold-low area (48-56°N, 102-116°W) for May 14, 1986 at 2036-2051Z	75
3.33	Radiosonde at Edmonton Stony Plain (WSE) at 0000Z May 15, 1986 (close to the time of satellite pass 7313).	76
3.34	IR-derived isotherms for May 15, 1986 at 2025-2040Z	78
3.35	Brightness isopleths for May 15, 1986 at 2025-2040Z	79
3.36	IR-derived 3 Dimensional temperature field of the cold-low area (46-54°N, 100-114°W) for May 15, 1986 at 2025-2040Z	80
3.37	IR-derived isotherms for May 16, 1986 at 2015-2030Z	82
3.38	Brightness isopleths for May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341, isopleth interval 20 counts.	83
3.39	IR-derived 3 Dimensional temperature field of the cold-low area (48-56°N, 91-101°W) for May 16, 1986 at 2015-2030Z	84
4.1	500-mb map for 0000Z July 16, 1986.	87
4.2	500-mb map for 1200Z July 16, 1986.	88
4.3	Surface Analysis map for 1200Z July 16, 1986.	89
4.4	Infrared Image of July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202.	90
4.5	Visible Image of July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202.	91
4.6	500-mb map for 0000Z July 17, 1986.	94
4.7	500-mb map for 1200Z July 17, 1986.	95
4.8	Surface Analysis map for 0000Z July 17, 1986.	96
4.9	Surface Analysis map for 1200Z July 17, 1986.	97
4.10	Infrared Image of July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216.	98
4.11	Visible Image of July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216.	99
4.12	500-mb map for 0000Z July 18, 1986.	101
4.13	500-mb map for 1200Z July 18, 1986.	102

Figure		Page
4.14	Surface Analysis map for 0000Z July 18, 1986.	103
4.15	Surface Analysis map for 1200Z July 18, 1986.	104
4.16	Infrared Image of July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230.	105
4.17	Visible Image of July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230.	106
4.18	IR-derived isotherms for July 16, 1986 at 2105-2121Z	109
4.19	Brightness isopleths for July 16, 1986 at 2105-2121Z	110
4.20	IR-derived 3 Dimensional temperature field of the cold-low area (49-57°N, 106-120°W) for July 16, 1986 at 2105-2121Z	111
4.21	Radiosonde at Vernon (WVK, B.C.) at 1200Z July 17, 1986.	113
4.22	IR-derived isotherms for July 17, 1986 at 2054-2110Z	114
4.23	Brightness isopleths for July 17, 1986 at 2054-2110Z	115
4.24	IR-derived 3 Dimensional temperature field of the cold-low area (49-57°N, 104-118°W) for July 17, 1986 at 2054-2110Z	116
4.25	Radiosonde at Edmonton Stony Plain (WSE) at 0000Z July 18, 1986 (close to the time of satellite pass 8216).	117
4.26	IR-derived isotherms for July 18, 1986 at 2044-2059Z	119
4.27	Brightness isopleths for July 18, 1986 at 2044-2059Z	120
4.28	IR-derived 3 Dimensional temperature field of the cold-low area (53-59°N, 95-109°W) for July 18, 1986 at 2044-2059Z	121
4.29	Radar scan of July 17, 1986, 1012Z (04:12 MDT)	123
4.30	Radar scan of July 17, 1986, 1042Z (04:42 MDT)	123
4.31	Radar scan of July 17, 1986, 1111Z (05:11 MDT)	124
4.32	Radar scan of July 17, 1986, 1210Z (06:10 MDT)	124
4.33	Radar scan of July 17, 1986, 1313Z (07:13 MDT)	126
4.34	Radar scan of July 17, 1986, 1412Z (08:12 MDT)	126
4.35	Radar scan of July 17, 1986, 1442Z (08:42 MDT)	127
4.36	Radar scan of July 17, 1986, 1512Z (09:12 MDT)	127
4.37	Radar scan of July 17, 1986, 1541Z (09:41 MDT)	128
4.38	Radar scan of July 17, 1986, 1740Z (11:40 MDT)	128

Figure		Page
4.39	Radar scan of July 17, 1986, 2037Z (14:37 MDT)	130
4.40	Radar scan of July 17, 1986, 2107Z (15:07 MDT)	130
4.41	Radar scan of July 17, 1986, 2236Z (16:36 MDT)	131
4.42	Radar scan of July 18, 1986, 0004Z (18:04 MDT)	131

1. INTRODUCTION, INSTRUMENTATION AND OBSERVATION

1.1 Introduction

This study is concerned with two memorable 1986 weather events: the late spring snow storm in the Calgary area, and the heavy rains in July that caused extensive flooding in West-Central Alberta, including the City of Edmonton. The area of interest of this investigation includes Alberta, Saskatchewan and, to a lesser extent Manitoba, where the storms ultimately moved and dissipated.

This chapter presents a description of instrumentation and the materials used : Satellite, Radar and weather stations, providing cloud imagery, precipitation scans and conventional synoptic charts. The method by which data were selected and processed is given in Chapter 2. Chapter 3 deals with the intense spring snow storm in the Calgary region. This is followed by the case study of the summer rain storm in Edmonton in Chapter 4. Finally, a summary and conclusions are presented in Chapter 5.

1.2 Instrumentation and observation

The two major sources of data used in this study are imagery obtained from satellite NOAA-9 (or NOAA-F), in the series of the third-generation operational, polar-orbiting environmental system, and conventional surface and upper-air data. Radar, a supplementary source of data was available only for the analysis of the July storm.

1.2.1 The NOAA Satellite System

Only a general description of the NOAA-9 Automatic Picture Transmission (APT) is given here, inasmuch as comprehensive discussions of the TIROS-N/NOAA satellite system can be found in Schwalb (1978), and Barnes & Smallwood (1982).

NOAA-9 was launched on December 12, 1985 at 1042Z. Figure 1.1 shows the craft in space and Figure 1.2 shows the main parts of the satellite vehicle.

THE QUALITY OF THIS MICROFICHE IS HEAVILY DEPENDENT UPON THE QUALITY OF THE THESIS SUBMITTED FOR MICROFILMING.

UNFORTUNATELY THE COLOURED ILLUSTRATIONS OF THIS THESIS CAN ONLY YIELD DIFFERENT TONES OF GREY.

LA QUALITE DE CETTE MICROFICHE DEPEND GRANDEMENT DE LA QUALITE DE LA THESES SOUMISE AU MICROFILMAGE.

MALHEUREUSEMENT, LES DIFFERENTES ILLUSTRATIONS EN COULEURS DE CETTE THESES NE PEUVENT DONNER QUE DES TEINTES DE GRIS.

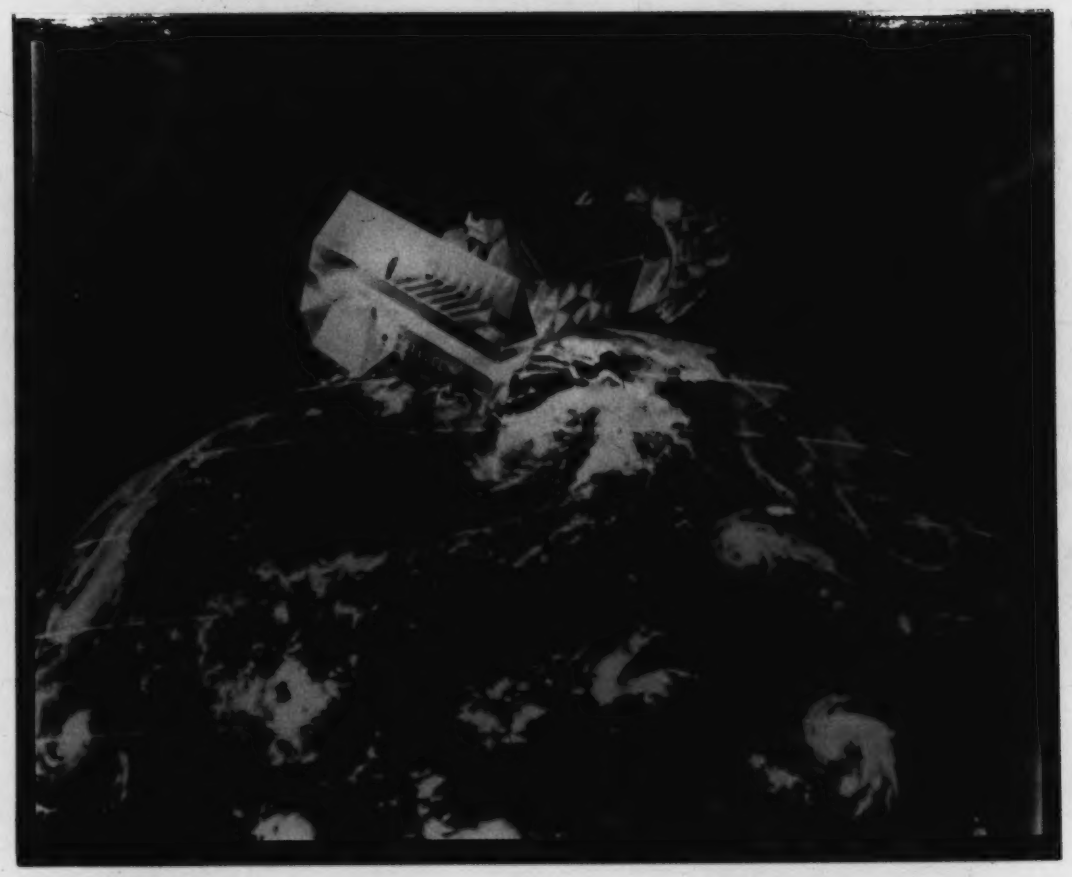

Figure 1.1 The spacecraft in space. (Taken from Environment Canada Poster)

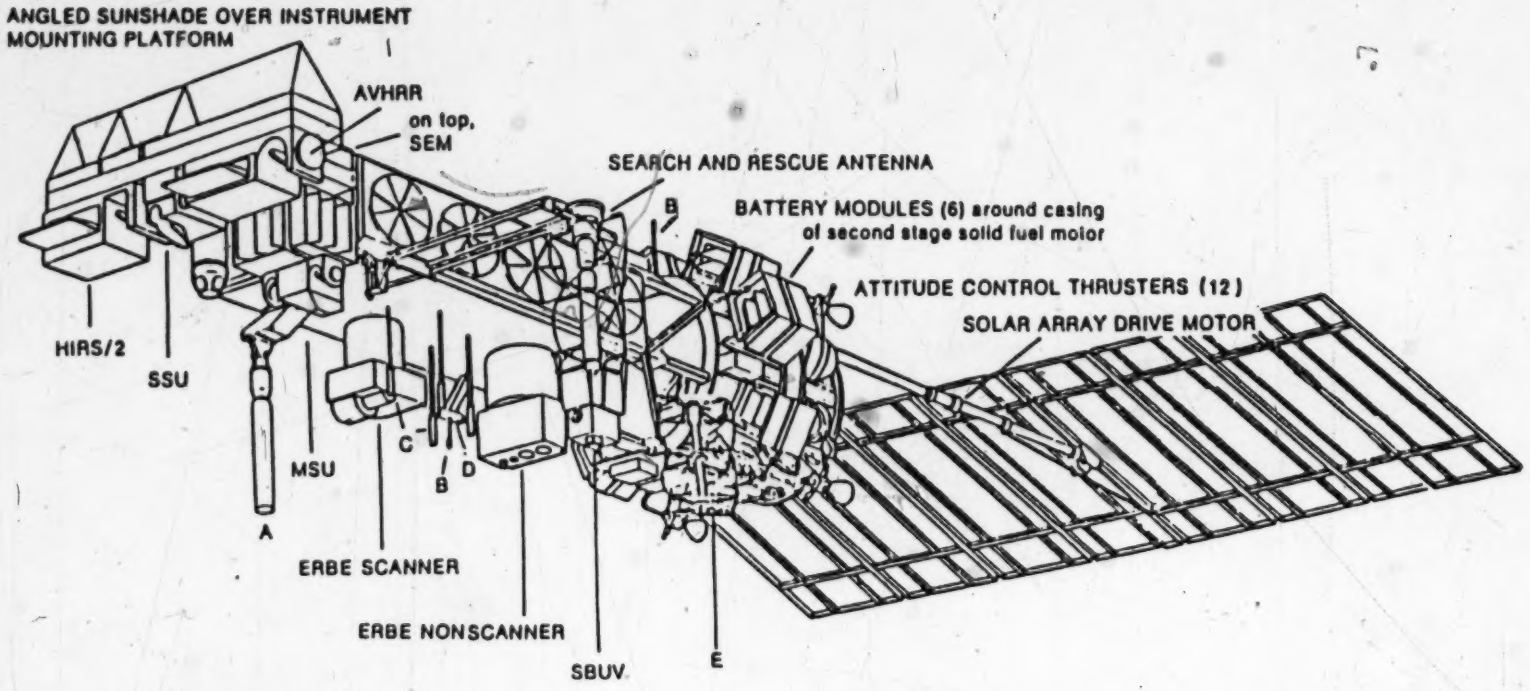

Antennas identified by letters:
A—UHF for the DCS.
B—S-band omni antennas.
C—Four S-band antennas.
D—Beacon command antenna.
E—VHF real-time antenna.

Figure 1.2 The main parts of the NOAA-9 vehicle.(after Schwalb, 1982)

The polar orbiting satellite is placed in a sun-synchronous orbit, i.e. the satellite passes over any given longitude at the same time each day. This satellite has a period of approximately 102 minutes with an inclination angle of about 99°. It orbits at an average height of 865.0 km with a nodal regression of 25.51° i.e the satellite shifts westward 25.51 degrees of longitude per orbit at the equator. The NOAA-9 satellite was launched with a northbound equator crossing between 1400 and 1800 Local Solar Time (LST). Figure 1.3 shows the equator crossing time geometry of NOAA-9.

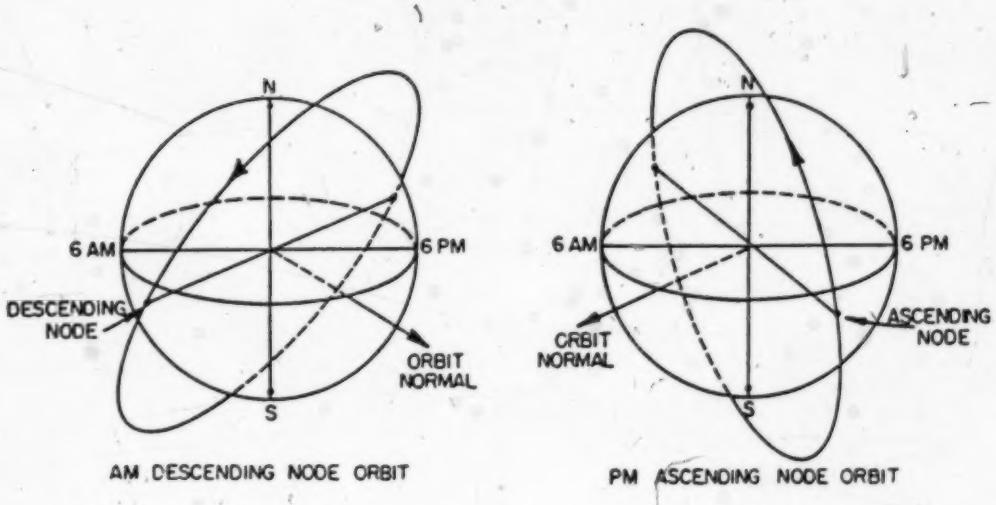

Figure 1.3 The equator crossing time geometry of NOAA-9.

NOAA-9 provides only infrared imagery during the early morning (0600 through 1000 LST) when moving southbound, but both visible and infrared imagery during the afternoon (1400 through 1800 LST) when moving northbound.

The satellite precesses at rate of about one degree per day, so that the orbit maintains a nearly constant orientation with respect to the Sun over the course of the year.

1.2.2 Satellite Scanning

The satellite carries on board an Advanced Very High Resolution Radiometer (AVHRR)[1] instrument which provides image data for the real time Automatic Picture Transmission (APT) service. The instrument senses radiation in four spectral channels (see Table 1.1).

Table 1.1 NOAA-9 AVHRR Channel Characteristics.

Channel	Resolution at Subpoint (km)	Wavelength (μm)	Primary Use
1	1	0.55 - 0.90	Daytime cloud and surface mapping
2	1	0.73 - 1.10	Surface water delineation
3	1	3.55 - 3.93	Sea surface temperature (SST), night time cloud mapping
4	1	10.5 - 11.5	Sea surface temperature, day/ night cloud mapping
5	1	11.5 - 12.5	Sea surface temperature

AVHRR channels 1 and 2 can be used to discern clouds, land-water boundaries, snow and ice. When data from the two channels are compared, an indication of ice/snow melt inception is obtained. The data from channel 4 (Infrared window) can be used to measure cloud distribution day and night and to determine the temperature of the radiating surface. Channels 3, 4 and 5 can be used to determine the sea surface temperature (SST). Examples of imagery from AVHRR are given by Figs. 3.6 and 3.7.

[1] AVHRR or AVHRR/1 indicates NOAA-9 is equipped with a four-channel instrument, while AVHRR/2 indicates that the satellite is eqipped with a five-channel instrument.

The APT signal consists of any two of the AVHRR channels: normally channels 2 and 4 are transmitted during the daylight portion of the orbit, and channels 3 and 4 during the night portion. In this study, channel 2 provides visible imagery during daylight and channel 4 provides infrared imagery during both day and night.

These channels are pre-processed to achieve both bandwidth reduction and geometric correction, and then are time-division multiplexed into an output data stream. The AVHRR mirror rotates at the rate of 360 revolutions per minute. The bandwidth reduction algorithm involves sending one of every three scanlines to the APT transmitter, thus the effective rotation of the APT signal is 120 scanlines per minute or 2 scanlines per second. Each AVHRR scanline contains 2048 pixels per channel which samples radiation from 55.4° on each side of nadir[2]; for a satellite at a height of 865 km, the 55.4° nadir angle corresponds to approximately 13.5° great-circle arc length on the earth's surface. For APT transmission the 2048 pixels are reduced to 909, using the algorithm summarized in Table 1.2 and shown in Figure 1.4. The geometric corrections are performed to maintain constant resolution along the scanline.

Table 1.2 APT linearization regions.

Region 1	±16.9° from nadir	Average four continuous samples
Region 2	16.9° to 34.8° either side of nadir	Average two samples; skip one and repeat
Region 3	34.8° to 43.8° either side of nadir	Average two samples
Region 4	43.8° to 48.8° either side of nadir	Average 1 1/2 samples ($\frac{A+B}{2}$:$\frac{B+C}{2}$)
Region 5	48.8° to 55.4° either side of nadir	Retain original resolution

Since the satellite regresses, (i.e. shifts westward) at the rate of 25.51 degrees of longitude per orbit, there is a two-degree longitude overlap between each two consecutive

[2]Nadir is the point vertically below the satellite, and the nadir angle is the angle measured at the satellite between a specific axis or ray and the local vertical.

orbits at the equator. Since the scanline of the mirror is perpendicular to the satellite's path, its sweep combined with the motion of the satellite gives complete coverage of the area in the field-of-view of the radiometer. This coverage corresponds to an arc length of about 27.0° (2997 km) on the ground at the equator, and increases to approximately 55 degrees of longitude at 50° N latitude.

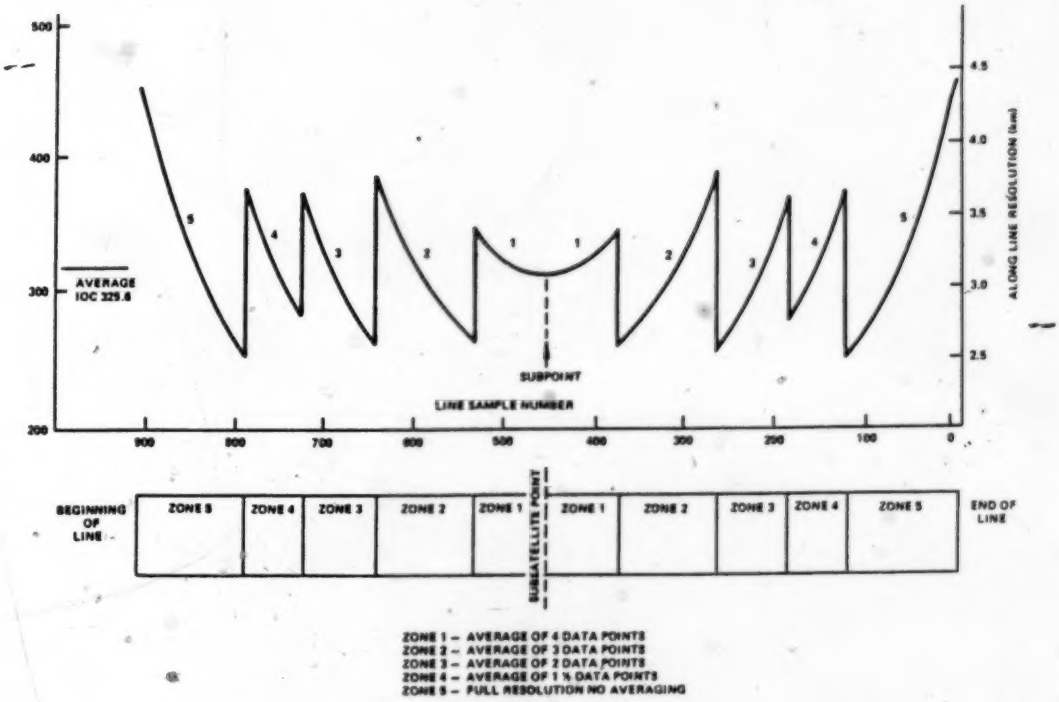

Figure 1.4 APT linearization regions and resolution.(after Schwalb, 1978)

1.2.3 Satellite Resolution

For a given altitude, the resolution of a line-scan device, such as AVHRR, is a function of the instantaneous field-of-view of the sensor (spot size on the Earth). As the sensor scans outward from the satellite subpoint, the spot size on the surface of the Earth increases in size.

The NOAA-9 AVHRR has a field-of-view of 0.0013 radians. With this field-of-view and a satellite height of 865 km, the subpoint resolution is approximately 1.0 km and the resolution at the edge of the data swath is approximately 4 km.

The University of Alberta's satellite laboratory is equipped to receive the analog APT signal and convert it to digital counts between 0 and 255 at a digitizing rate of 3200 Hertz. High counts correspond to high reflectivity and low temperature for the visible and infrared band respectively.

The visible and infrared data are represented along a scan by one half second or 1600 pixels. Only 1530 are saved; of this 1400 contain infrared and visible image data (700 for each channel), 130 are telemetry and synchronization data. The remaining 70 are for digitizing resynchronization and are not collected. An example of one scanline of APT data is given in Figure 1.5.

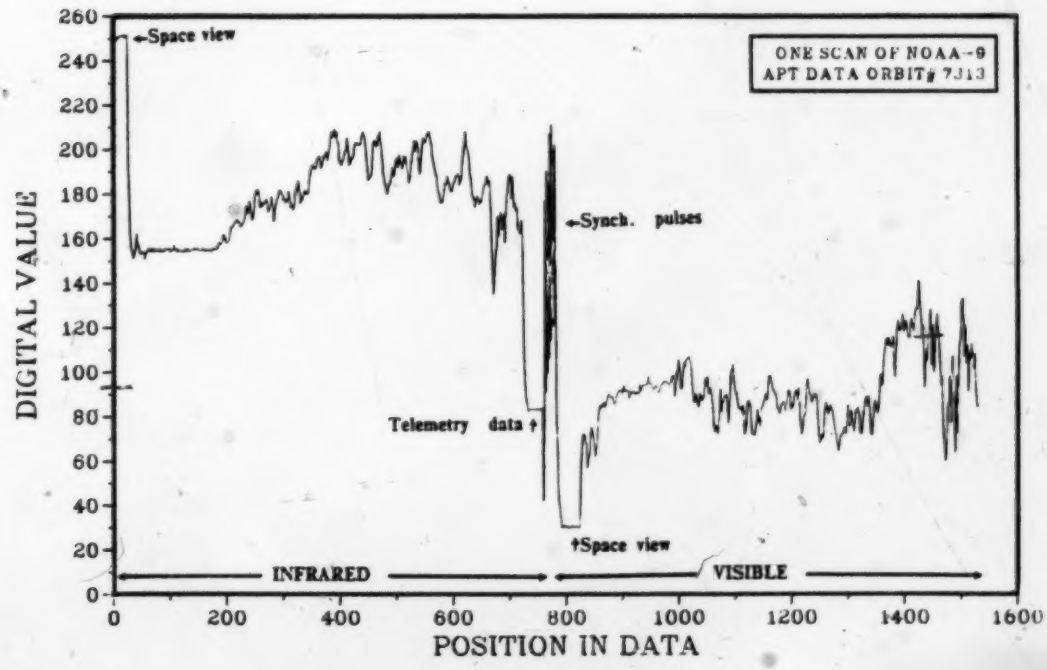

Figure 1.5 Example of one scanline of NOAA-9 APT data.

1.2.4 Calibration of Infrared Data

In order to calibrate the infrared data, it is necessary to relate the recorded APT signal to AVHRR data. Calibration data are sent from the satellite with each scanline. There are 16 pieces of calibration data, each repeated over 8 lines, so that a total of 128 lines are needed to receive all information (an example of ouput data can be found in Appendix D). This is known as a telemetry frame, as shown in Figure 1.6.

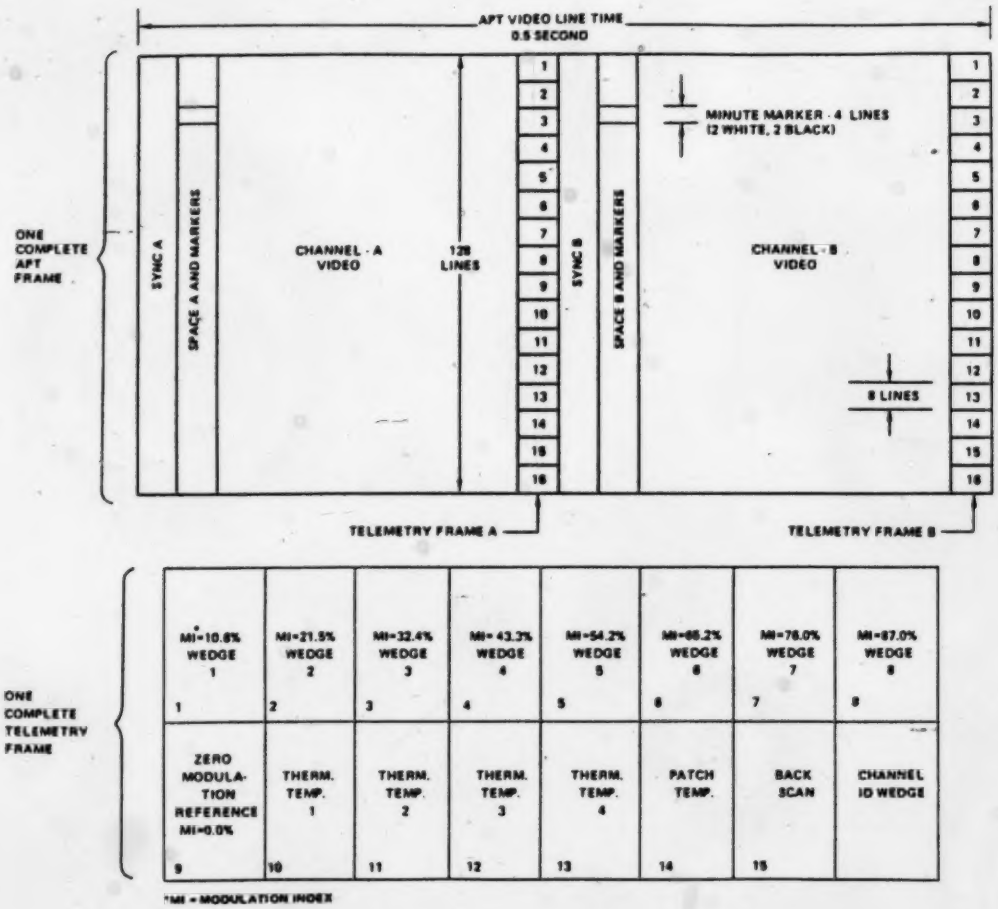

Figure 1.6 APT frame format.(after Schwalb, 1978)

From this figure, the first 9 boxes consist of wedge values. Each wedge is assigned a known digital count before the satellite is launched. Boxes 10, 11, 12 and 13 are digital counts

from the radiometer viewing four Platimum Resistance Thermometers (PRTs) embedded in its housing, which is designed to be a black body. Box 14 contains Patch temperature, Box 15 counts for the sensor viewing the black body and Box 16 contains channel identification.

By comparing digital wedge values received on the ground to the expected values, it is possible to relate ground-received digital counts for cloud top temperature and brightness to satellite measured counts. The relationship between received digital counts and wedge levels is shown in Figure 1.7.

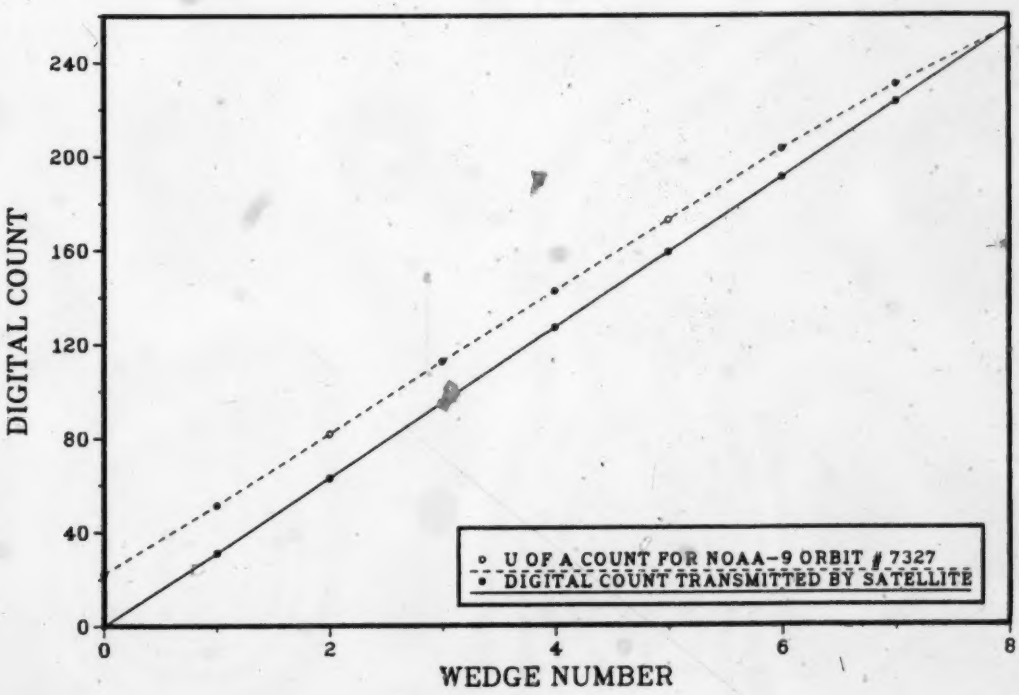

Figure 1.7 The relationship between received digital counts and wedge levels.

The discrepancy between the two sets of data is due to the digital-analog-digital conversion that takes place during the transfer of the data from satellite to the ground. A cubic spline fit between these two data sets was performed by Subroutine ICSICU that is available from IMSL (International Mathematical and Statistical Libraries) at the University of Alberta. The coefficients obtained from this procedure were then used to determine the

average temperature of PRTs. A second cubic spline fit was then performed in order to find the recorded University of Alberta digital values corresponding to the average PRT temperatures. Once the relationship between the onboard calibration wedge level and those recorded at the University of Alberta is known, the infrared data may be calibrated to obtain the temperature field, using the infrared calibration technique described by Wieler(1981) and repeated here in Appendix A.

On Figure 1.8, Case Study # 1, the plot of digital counts versus temperature for 4 different satellite orbits shows that the change in temperature difference over the range 200° K to 270° K is only about ± 0.5° K. This is also supported by Case Study # 2 for 3 different satellite orbits (Fig. 1.9). Hence, a separate spline curve is not necessary for each orbit.

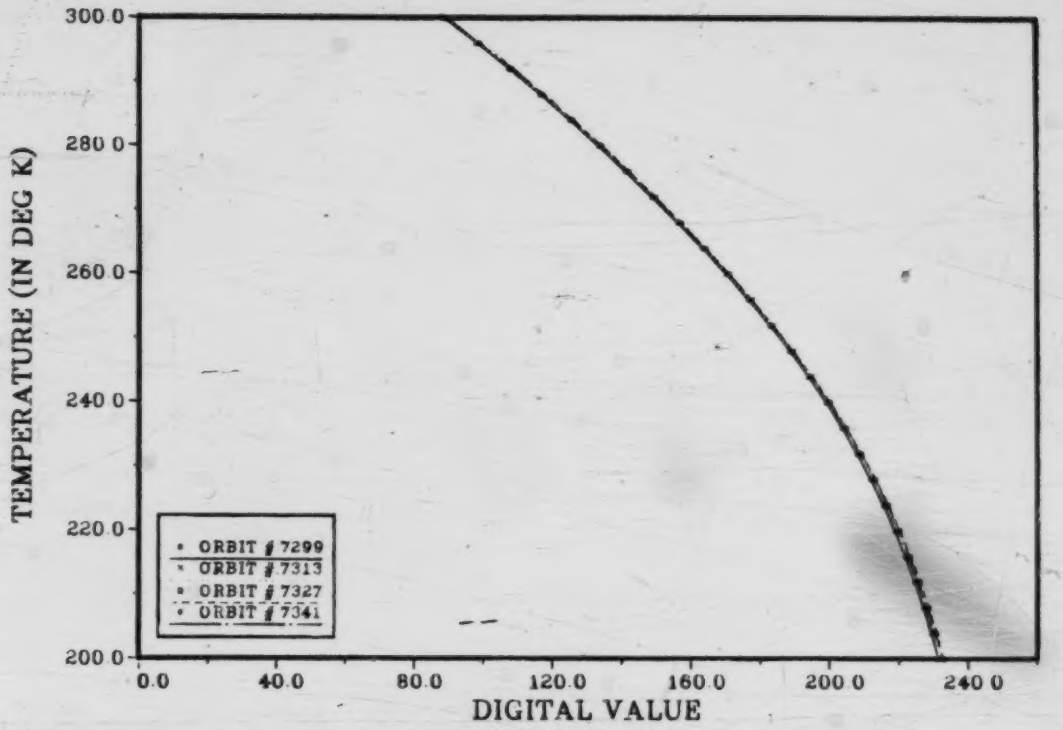

Figure 1.8 Calibration temperature curve for Case Study # 1.

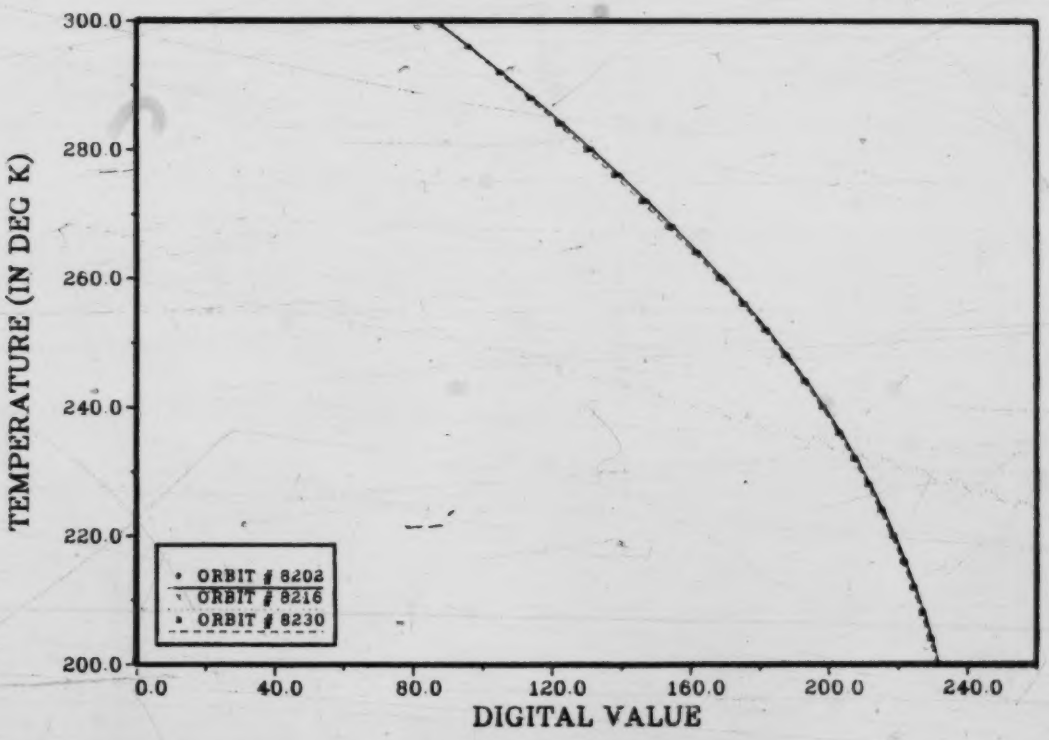

Figure 1.9 Calibration temperature curve for Case Study # 2.

1.3 Radar

There are many different kinds of radar systems. The CWSR-81 System is a late model weather radar employed by the Atmospheric Environment Service (A.E.S) of Canada. The Edmonton District radar is located at Carvel, near Stony Plain, about 30 miles West of Edmonton, Alberta. The following summary is based on material abstracted from training manuals (Bendell, 1985), unpublished notes and manuscripts (Smith & Rogers, 1970).

1.3.1 Fundamentals of Radar

Radar (Radio Detection And Ranging) is based on the principle that an electromagnetic wave is propagated through space at the speed of light, 2.998×10^8 m/sec, and then that its energy is scattered and reflected by objects in the environment. Targets may be defined as anything that will reflect a detectable amount of energy back to the antenna, such as terrain (hills, mountains, etc.), rain, snow, hail and sometimes drizzle.

By means of an antenna producing a narrow beam in the manner of a searchlight, one can scan with the antenna for reflect signals, and determine the direction and distance of the reflecting object. An elementary Radar system is shown in Figure 1.10.

By measuring the time interval between the transmission of the signal and the reception of the echoes[3], the range (or distance) of the object can be calculated as follows:

$$R = c \times \frac{\Delta t}{2}$$

where R is the range (m)

c is the speed of light (m)

Δt is the time interval (sec)

1.3.2 Major Components of Radar

Figure 1.11 shows the main components of a radar system. It consists of four subsystems: the transmitter, the antenna system, the receiver, and the processor and displays.

[3]The scattered signals received from the targets are referred to as "echoes".

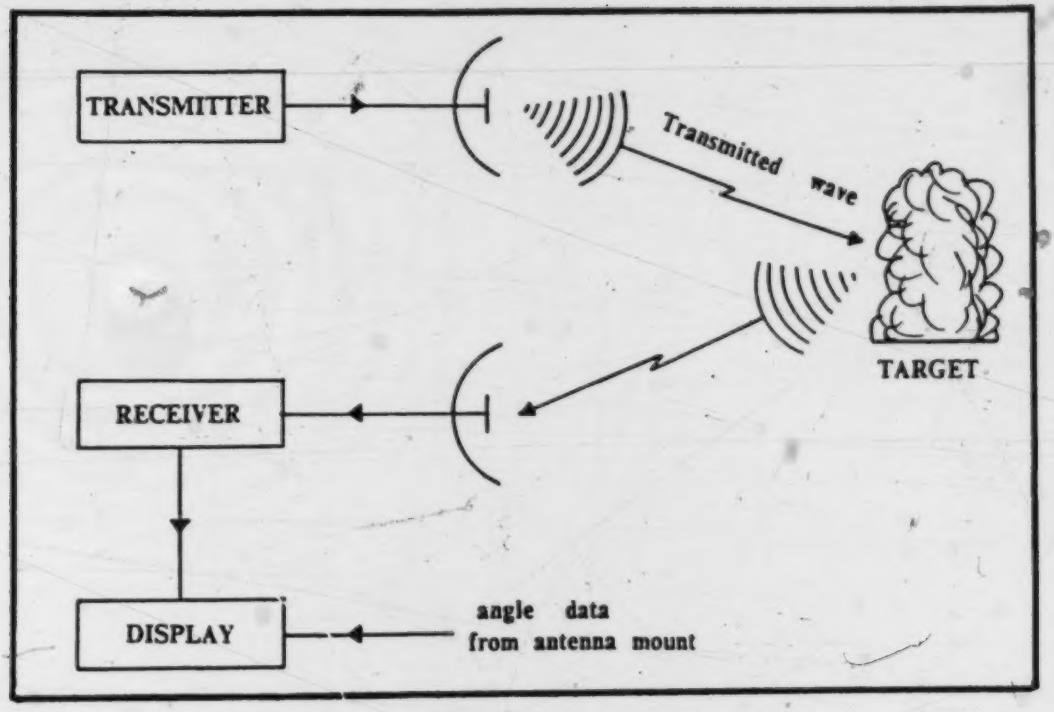

Figure 1.10 An elementary Radar System.

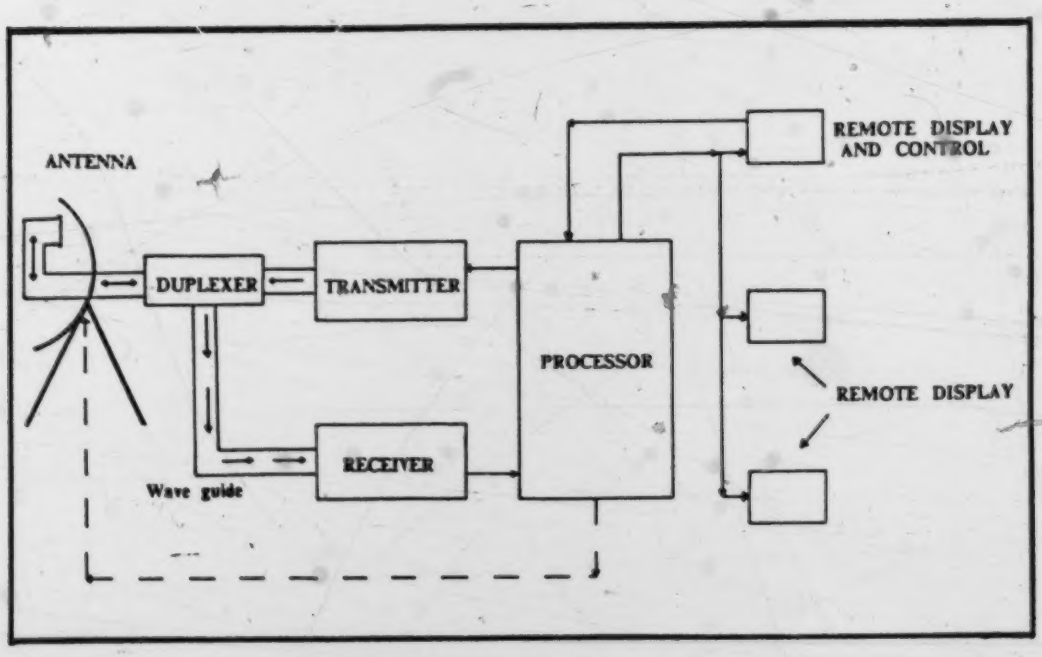

Figure 1.11 The main components of a Radar System.

The transmitter produces pulses of energy of the desired frequency and duration. It consists of a power supply, a synchronizer, a module for converting Alternating Current (A.C) to Direct Current (D.C), and a self-excited oscillator called a magnetron which produces the actual burst of microwave energy that is transmitted to the antenna system via a wave guide.

The antenna system focuses the energy and directs it to the appropriate azimuth and elevation, and then receives and concentrates energy reflected from targets. It consists of a paraboloid reflector, a horn antenna and a fast-acting switch, called a duplexer, that alternately connects the antenna to the transmitter and the receiver.

The returned energy from the antenna system is amplified and converted to a video signal by the receiver, analogous to the picture information contained in an ordinary television signal. The video signal is amplified before being fed to the display. The receiver consists of a mixer, a non-linear device, usually a crystal diode, used to convert the Radio Frequency (RF) echo to a lower frequency, called Intermediate Frequency (IF), an IF amplifier, and a detector to detect the shape of the signal and remove background noise.

The returned signal is automatically corrected for range attenuation out to 230 km and is given in units of dBZ. These intensities are converted into 6 precipitation levels in mm/hr using the empirical equation of Marshall-Palmer (Smith & Rogers, 1970).

The Plan Position Indicator (PPI) displays the location of the echoes returned by ground objects and precipitation. The PPI display is an AED COLOWARE 767 Color Graphics Display Terminal and a hard copy output is produced by an Advanced Color Technology Chromajet ACT II color printer.

The processor may allow for remote control of the antenna or may itself control the antenna directly. It also processes the analogue video signal from the receiver into a digitized intensity enhanced video signal, to be transmitted to the displays.

An example of output of the CWSR-81 Radar System is shown in Figure 1.12. The date and time (UTC) are shown in the lower right corner. The actual time of the start of the scan at the Radar site, the elevation angle of the antenna and the six Digital Video Integrator

and Processor (D.V.I.P) levels (see Table 1.3) representing the rate of precipitation in mm per hour are in the upper left corner. The background represents the geographical features in the area of coverage. The range rings mark 100-200 km distances in the short range, and 200-400 km in the long range; they are independent of the background.

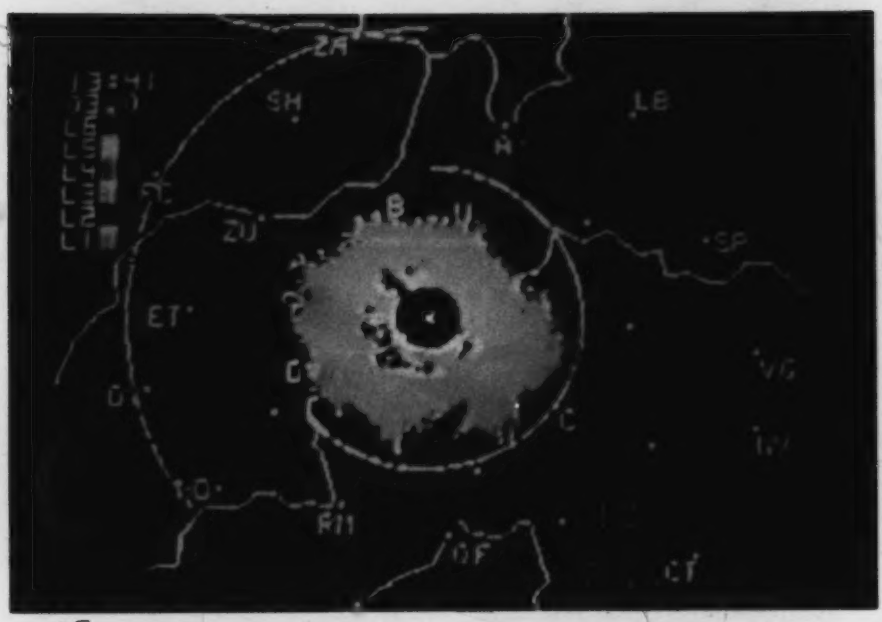

Figure 1.12 PPI radar scan on July 17, 1986, 1343Z at elevation 3°.

Table 1.3 DVIP Precipitation Rate (mm/hr) Level.

DVIP Level	Summer	Winter
1	<2.0	<1.0
2	2.0-4.9	1.0-2.4
3	5.0-13.9	2.5-6.9
4	14.0-39.9	7.0-19.9
5	40.0-99.9	20.0-49.9
6	≥100.0	≥50.0

1.3.3 Radar Wavelengths

It is common practice in radar meteorology to describe a radar in terms of its wavelength rather than its frequency.

The wavelengths used in most radar systems fall within the microwave portion of the electromagnetic spectrum, which extends from less than one cm to 23 cm or about 30 to 1.3 GHz[4] in frequency. Radar bands, range of wavelengths (λ), and frequencies (f) are listed in Table 1.4.

The factors governing the choice of wavelength to be used in a particular radar set are many. They include considerations of sensitivity resolution requirements, the nature of the targets to be studied, and the effects of the intervening atmosphere on the echo.

[4] 1 GHz is one billion Hertz, or 10^9 Hz.

Table 1.4 Radar bands, wavelengths, most popular wavelengths and their primary uses.

Band	λ (cm)	Most popular λ (cm)	f (GHz)	Primary Use
L	15.00-30.00	23.00	1.3	Air Trafic Control.
S	7.50-15.00	10.00	3	Weather Surveillance. Terminal Air Traffic Control.
C	3.75-7.50	5.00	6	Weather Surveillance.
X	2.40-3.75	3.00	10	Weather Surveillance - Ships.
K_u	1.67-2.40	2.00	15	Weather Avoidance.
K	1.13-1.67	1.00	30	Small Aircraft.
K_a	0.75-1.13	0.86	35	Cloud Detection Research.

1.3.4 Beam Width

The antenna beam pattern shown in Figure 1.13 , consists of a "Main Lobe" along the beam axis[5], and a number of smaller lobes, called "Side Lobes". The smaller lobe in direction nearly opposite to the beam axis are often referred to as "Back Lobe". The angular width of the main lobe is called the beamwidth. It is usually defined as the angle between two directions (in the principal plane) where the antenna gain function is one-half or 3dB less than its maximum value.

The resolution capacity of a radar system is related to the concentration of the transmitted power by the antenna into a narrow beam. The maximum concentration of energy (Pmax) occurs along the beam axis. As one moves perpendicularly away from the axis, the energy level becomes less until a point is reached where energy level is one-half that measured at the axis, called a half power point ($\frac{Pmax}{2}$).

[5]The direction of the maximum gain is called the beam axis.

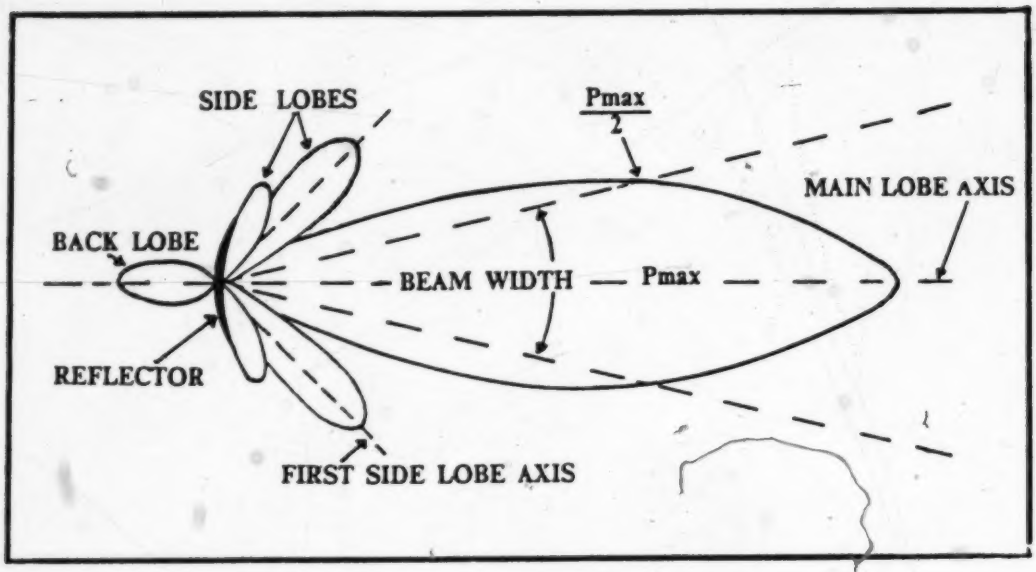

Figure 1.13 The Antenna Beam Width Pattern of a Radar System.

1.3.5 Characteristics of The CWSR-81 Radar System

The Table 1.5 below gives some characteristics of the CWRS-81 radar system

Table 1.5 Characteristics of The CWSR-81 system.

Transmitter	Wavelength	5.3 cm
	Frequency	5600 Mhz
	Peak Power	250 KW
	Pulse length	2.0 μsec
	Pulse repetition frequency	250 pps
Receiver	Sensitivity	-106 dBm
	Dynamic range	80 dB
	Sensitivity Time Control law	r^2
	Sensitivity Time Control range	230 km
Antenna	Type	Paraboloid
	Diameter	3.7 m
	Gain	43 dB
	Beam width at 3 dB	1.1°
	Rotation	0-3-6 RPM
	Elevation range	-2° to 60°

1.4 Conventional Surface and Upper-air Weather Maps

The weather maps used in this study are surface and upper-air maps. Both types are Polar Stereographic Secant Projection maps, true at 60° North.

The map factor is defined as the ratio of image distance on the secant plane which cuts the globe at 60° North, and actual earth distance. It is calculated by the following formula:

$$\sigma = \frac{1 + \text{Sin } 60^\circ}{1 + \text{Sin } \Phi}$$

where Φ is the latitude at a given point.

The reduction scale of map or map scale is defined as the ratio of the distance on the map at standard latitude 60° N to the corresponding distance on the Earth.

The charts are issued by the Canadian Meteorological Centre (CMC), and received at the University of Alberta on a facsimile recorder. The scale of the surface chart is 1:10,000,000 and that of the upper-air charts is 1:20,000,000. The charts received include the surface, 850-mb, 700-mb, 500-mb and 250-mb charts. The Alberta Weather Centre also issues surface charts for the province of Alberta area at six-hour intervals.

2. SELECTING AND ANALYSING DATA

2.1 Introduction

Figure 2.1 shows the three Prairie Provinces and British Columbia, and the area normally covered by two consecutive satellite passes of NOAA-9, which are being recorded and processed on a regular, daily basis each afternoon by the University of Alberta Satellite Laboratory.

2.2 Source and treatment of Data

The analysis of data was carried out in the following order: Synoptic data are studied first, next the Satellite data and then Radar video data where available. Finally the three sources of data are integrated and examined in relation to each other.

To define the geographical area on facsimile maps produced by the University of Alberta Satellite Laboratory, Reinelt et al. (1975) calculate latitude and longitude intersections from known satellite orbital parameters. These intersections can be transferred directly to satellite images in the form of fiducial marks, as shown in Figure 3.6. The equations used for this calculation can be found in the Subroutine ITERA of program SCANNING (Appendix C). Townsites, landmarks, and other geographic features can be located by the same method.

2.2.1 Synoptic Data

a. The surface synoptic charts compiled at 6-hour intervals from data collected at 0000Z, 0600Z, 1200Z and 1800Z were obtained from the Alberta Weather Centre.

b. The 1200Z 850-mb and 700-mb maps prepared by the Canadian Meteorological Centre (CMC), were used to examine the patterns of warm and cold air advection, vertical motion and fronts in the lower and middle-levels of the atmosphere.

c. The 500-mb maps at 12-hour intervals from CMC, contoured with isopleths of height and absolute vorticity, were used as mid-level indicators of the contribution by vorticity advection to the vertical motion field.

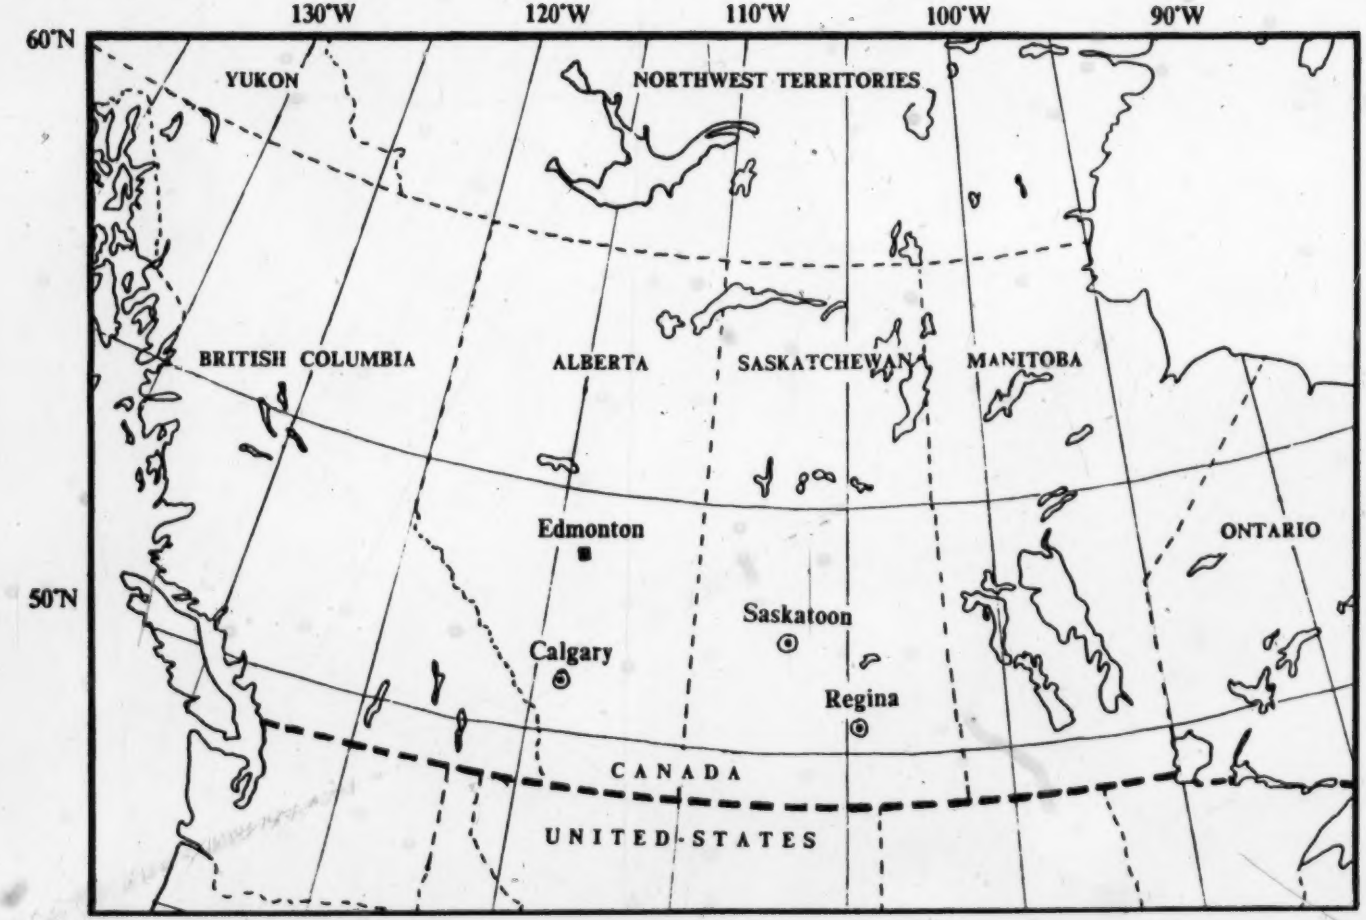

Figure 2.1 The area of study of the spring snow storm of May, and the heavy summer rainfall of July, 1986.

2.2.2 Storm tracks

For each of the two cases studied, the tracks and 12-hourly positions of the 500-mb lows and upper troughs were plotted at 00Z and 12Z. Similiar charts were prepared for the location and tracks of the surface lows.

On 500-mb charts, as shown in Figure 2.2, the symbol ⊗ indicates a low with at least one closed height contour, or a major trough with the symbol positioned approximately at the centre of the vorticity maximum.

On the surface chart, as shown in Figure 2.3, the centre of a low is also indicated by the symbol ⊗.

2.2.3 Satellite Data

The University of Alberta Satellite Laboratory records two NOAA-9 passes every afternoon. Data used in this study were recorded in May and July of 1986.

The following four steps are necessary to process the satellite data:

a. By counting the number of tick marks in the margin of a facsimile map (left side for VIS map, right side for IR map), the number of scans are determined by one tick mark equal to 10 scans

b. Since the orbital parameters are known, the number of scans to be skipped and the number of scans to be selected for analysis can be determined. The program READTAPE is then run in order to produce the telemetry data for the Infrared as well as the Visible band.

An example of one processed scan of data is shown in Figure 1.5 of Chapter 1.

c. The program SCANNING is then run in order to smooth, calibrate and convert the digital counts of the infrared data to cloud-top temperature. The program also converts the visible band data to equivalent brightness.

Programs READTAPE and SCANNING are modified version of programs used by Wieler (1981).

The calibration wedge levels, means and standard deviations, the latitude and longitude lines, the location of townsites are calculated by this program.

Examples of the program output are given in Appendix D.

d. The latitude-longitude data, the coordinates of townsites, on either infrared or visible data are used as input of program PL.FIELD.CL to produce either a cloud-top temperature (i.e. isotherm) map (Fig. 3.26) or a map of reflectivity isopleths (Fig. 3.27). It will be noted that latitude and longitude lines are not straight because the linearization (see Table 2.2) introduces jumps in the map scale. Lines are straight within each linearization region, but a discontinuity occurs at the regional boundaries.

2.2.4 Precipitation

Precipitation measurements are made and recorded at several different times of the day, depending on the requirements of the agency collecting the data. For climatological purposes, daily precipitation is measured in 24-hour periods. For AES stations in Alberta, the period in summer is from midnight to midnight Mountain Daylight Saving Time (MDT).

In the Calgary storm, most of East Central Alberta area received only rain, but the higher ground to the west received snow, as did many southern districts (Fig. 2.5). The precipitation pattern does show a topographic influence, especially in the area northwest of Calgary. Table 2.1 lists the stations with 40 millimetres of precipitation (with water equivalent for snow) or more over 48 hours on May 13 and 14, 1986. The maximum amount of precipitation (81.8 mm) shown on this table was recorded at Blindman station, located near the headwaters of the Blindman River northwest of Rimbey.

In the July rain storm, Table 2.2 shows that the 24-hour maximum precipitation was recorded at Carrot Creek (104.5 mm) which was the greatest amount reported in 42 years. Figure 2.6 shows the isohyets of 24-hour precipitation for the July storm.

Two examples of radar scans of heavy precipitation, both recorded on July 17th, are shown in Figures 2.7 and 2.8.

Table 2.1 Stations with 40 mm of precipitation (water equivalent) or more over 48 hours, May 13 and 14, 1986. (After Paruk, 1986)

Station	Amount (mm)
Big Valley	46.4
Blindman	81.8
Brightview	53.2
Cameron Falls	48.0
Camrose	51.2
Camrose 2	54.1
Cooking Lake Airport	50.6
Dakota West	67.0
Edmonton International Airport	40.8
Evan Thomas Creek	46.1
Fallentimber	51.8
Gwynn	69.4
Hailstone Butte Lookout	40.5
Huxley	60.8
James River Headwaters	45.4
Ksituan	50.0
Lacombe CDA	54.4
Lavoy	45.4
Madden	44.1
Markerville	57.6
Medicine Lodge	44.2
Mirror	58.4
Mossleigh	45.0
Ponoka South	62.1
Red Deer Airport	42.9
Rimbey	62.6
Scalp Creek	78.7
Stettler North	63.0
Strathmore East	52.7
Sundre Garrington	45.9
Sundre South	43.7
Sylvan Lake	71.4
Three Hills South	50.5
Trochu Equity	49.0
Trochu Town	49.6
Vulcan	53.4
Warwick	44.0
Wetaskiwin South	61.6

Table 2.2 24-hour precipitation amounts for July 17, 1986 and comparable 24-hour long-term precipitation records. (After Paruk, 1987)

Station	24-hour Record Rainfall(mm)	Actual 24-hour Rainfall (mm)	Years of Record
Banff	53.1	4.2	91
Brazeau	80.8	42.0	43
Carrot Creek	73.4	104.5	42
Clearwater	95.8	66.0	28
Edson (Airport)	68.6	37.6	63
Jasper	86.6	18.4	53
Lovett	94.2	63.0	41
Mayberne	79.8	61.1	39
Obed	67.8	43.6	26
Red Deer	85.3	16.4	47
Rocky Mountain House	76.7	72.0	37
Whitecourt	90.6	72.0	43

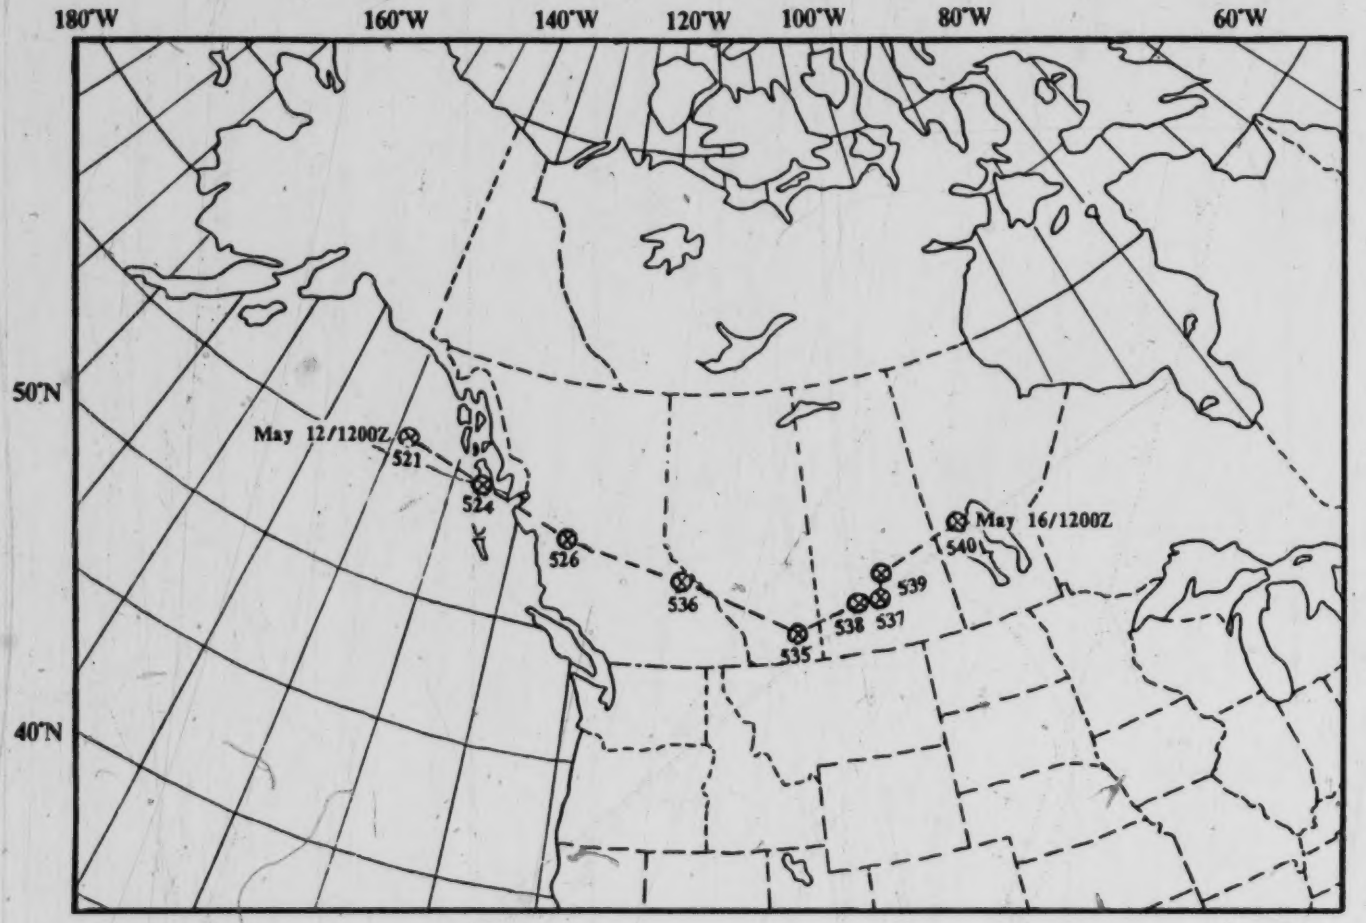

Figure 2.2 12-hour interval track positions of the 500-mb low of the spring storm, from 1200Z May 12 to 1200Z May 16, 1986. The numbers indicate the contour height of the low centre in decametres (dam).

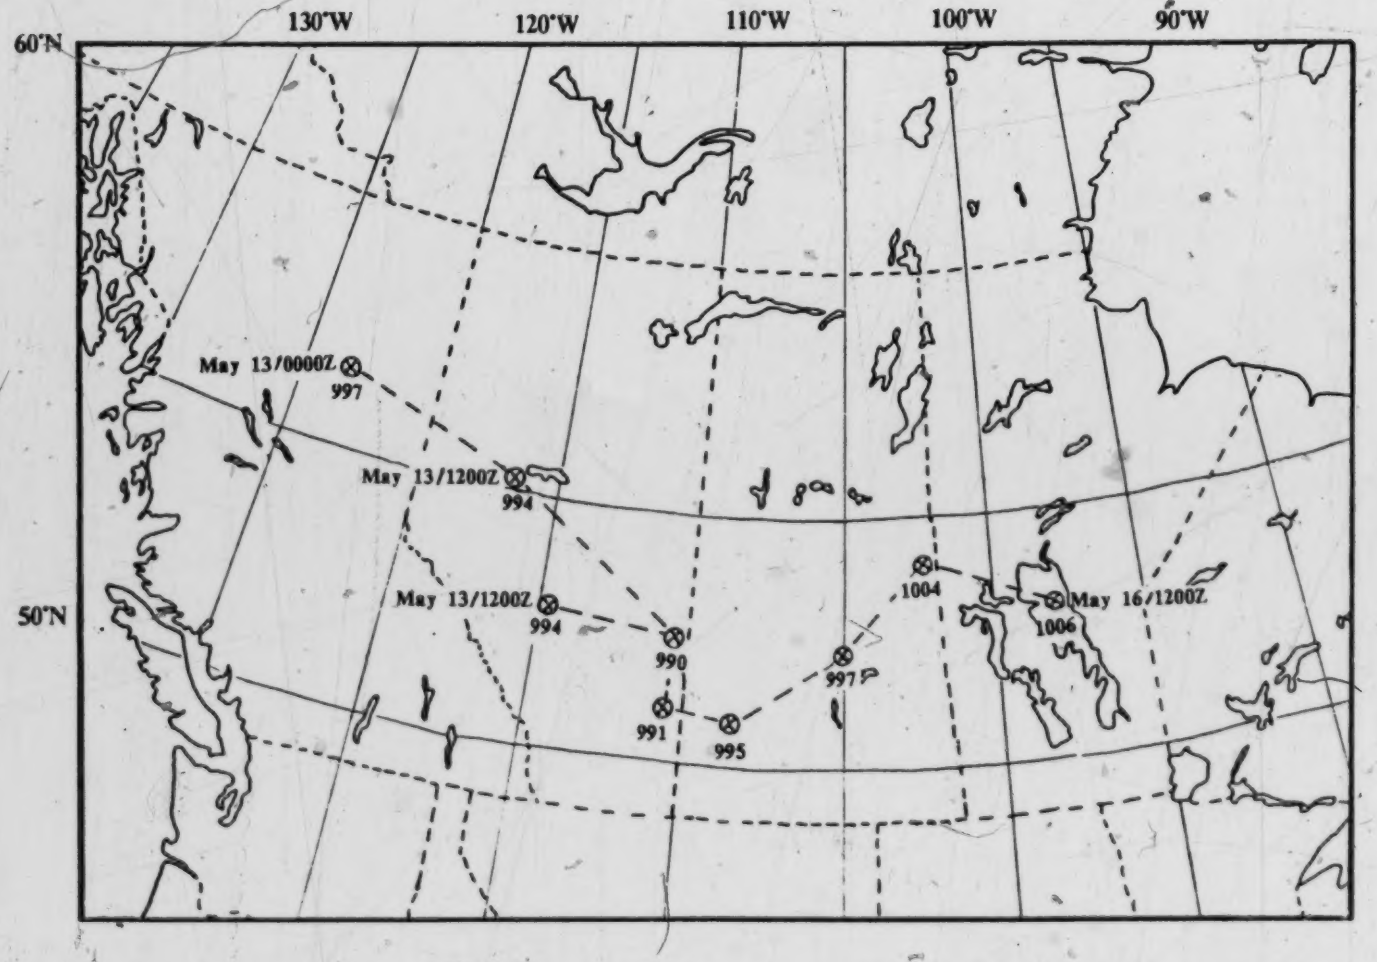

Figure 2.3 The track of the Surface low of the spring storm from 0000Z May 13 to 1200Z May 16, 1986. The 12-hourly positions of the low are marked with the central pressure in mb.

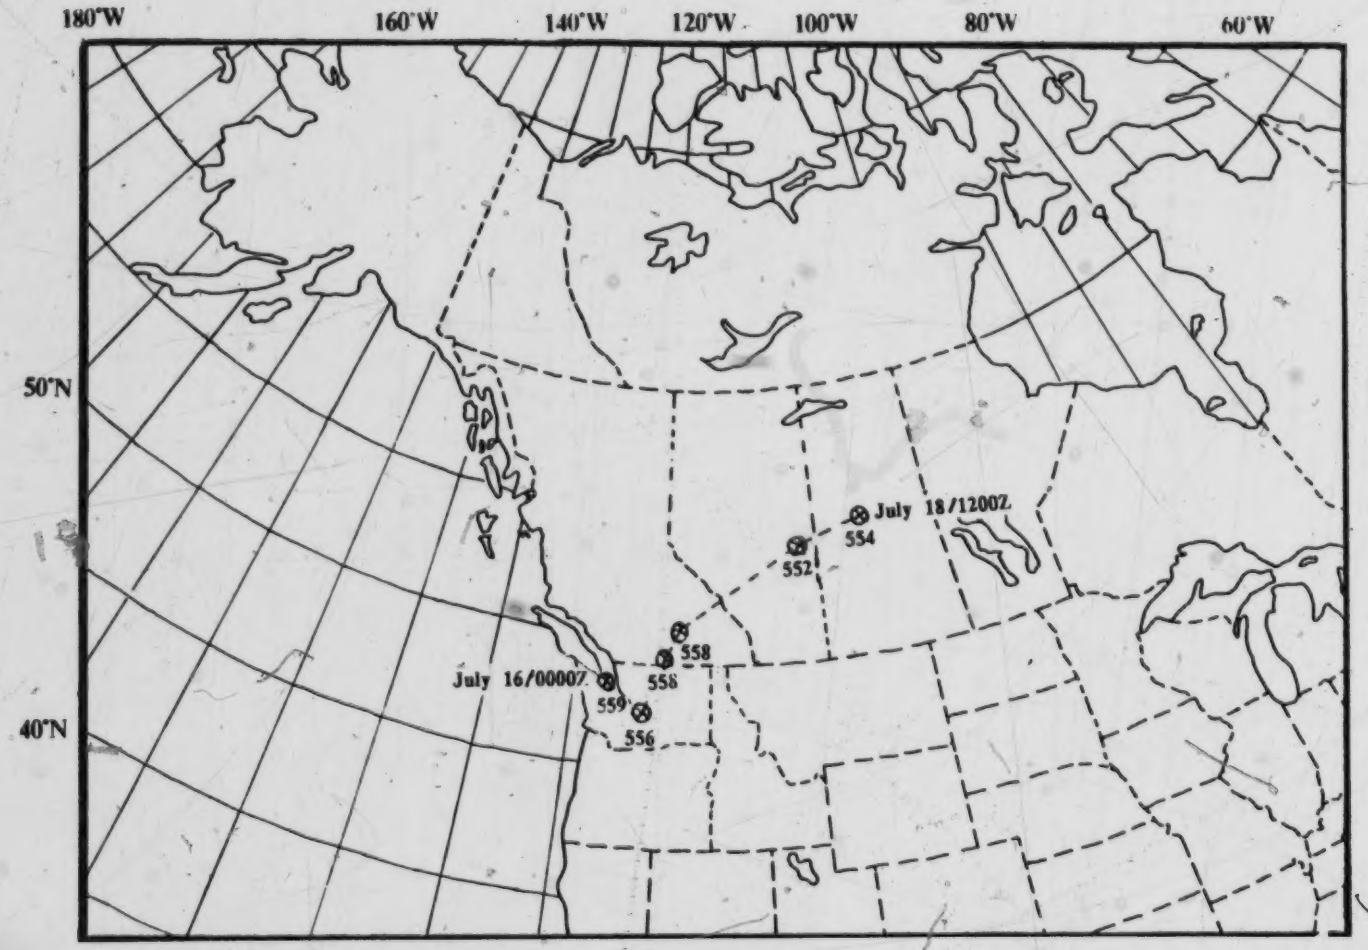

Figure 2.4 12-hour interval track positions of the 500-mb low of the July rain storm, from 1200Z July 16 to 1200Z July 18, 1986. The numbers indicate the contour height of the low centre in decametres (dam).

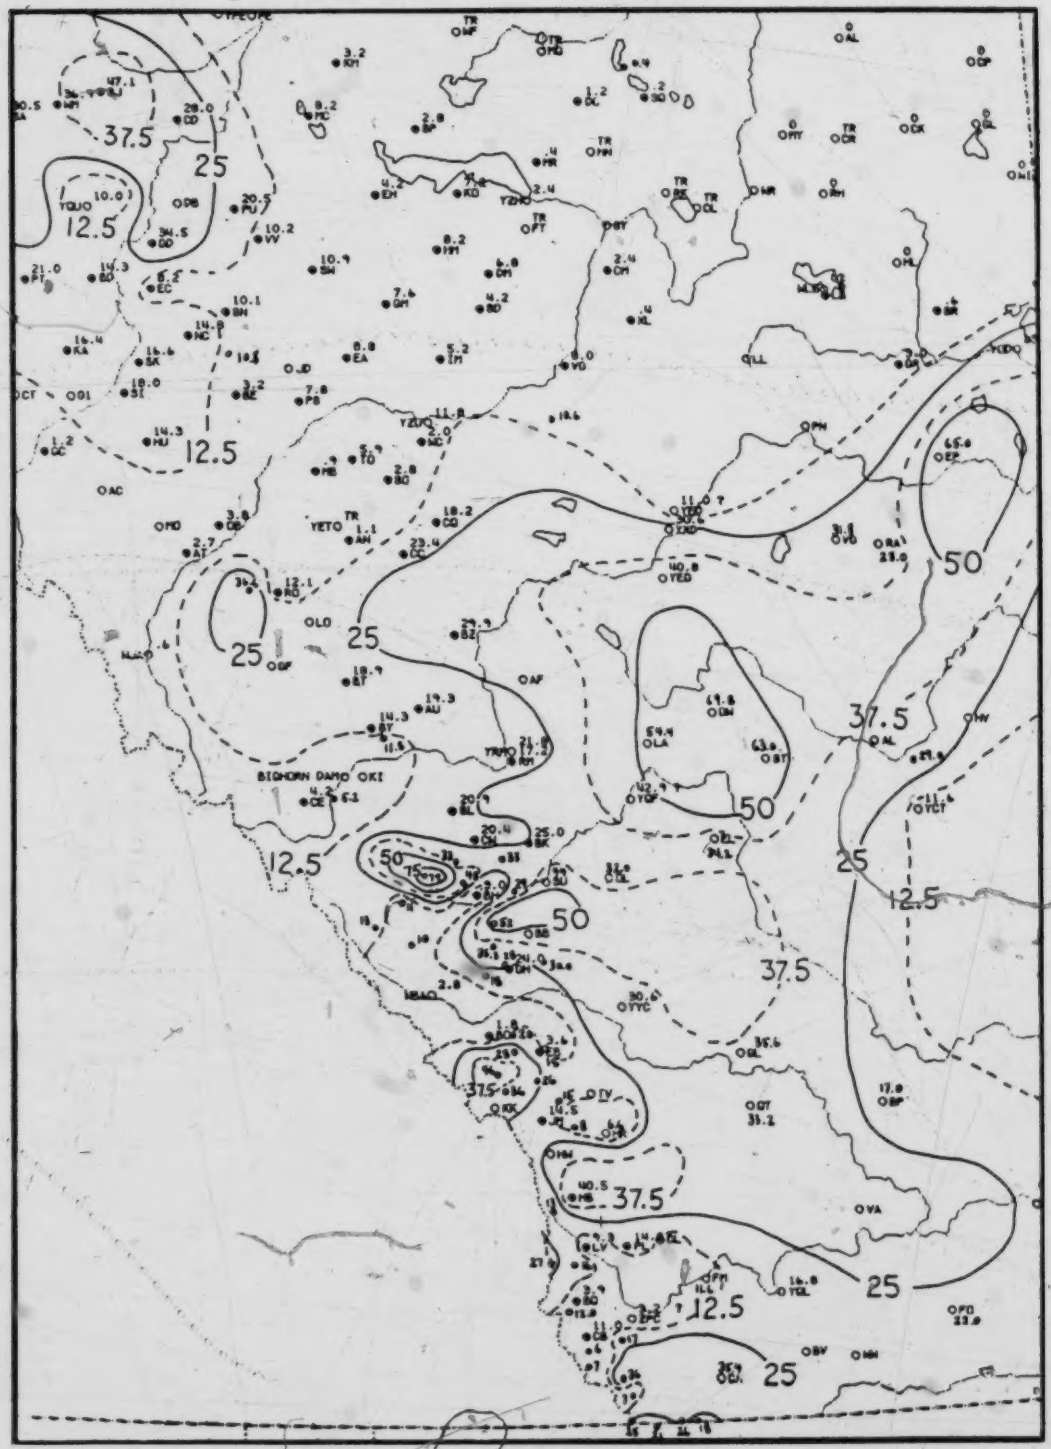

Figure 2.5 48-hour precipitation totals of the May, 1986, snow storm (from 13/1800Z to 15/1800Z). The isohyets are labelled in mm. (After A.E.S. Edmonton precipitation analysis)

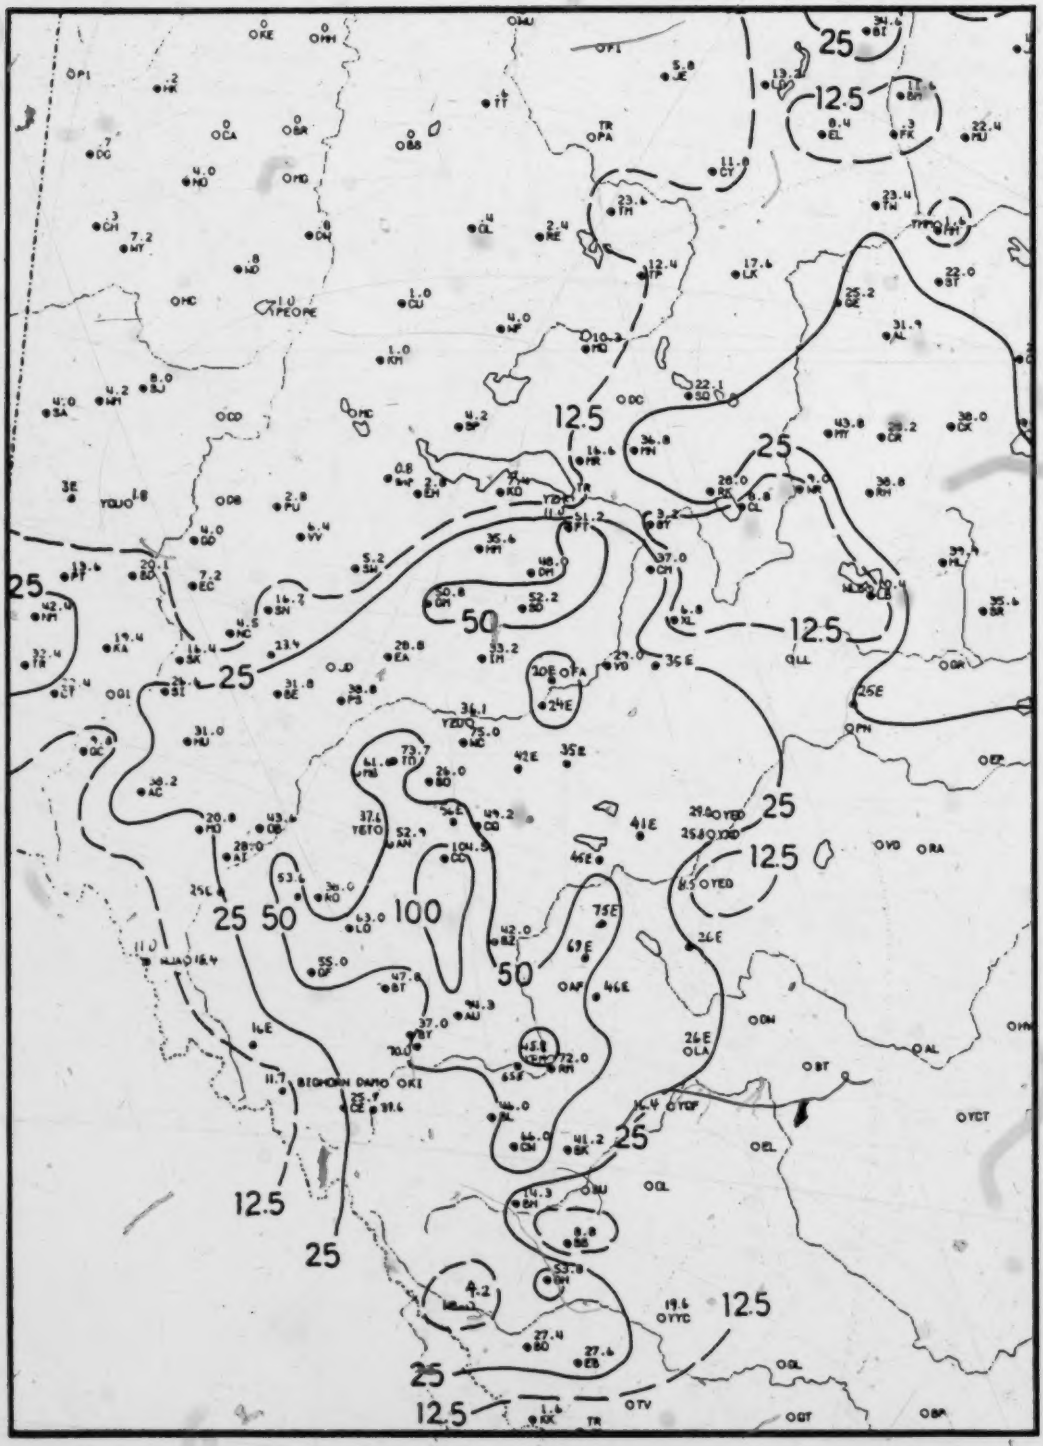

Figure 2.6 24-hour precipitation totals of the July, 1986, rain storm (from 17/1800Z to 18/1800Z). The isohyets are labelled in mm. (After A.E.S. Edmonton precipitation analysis)

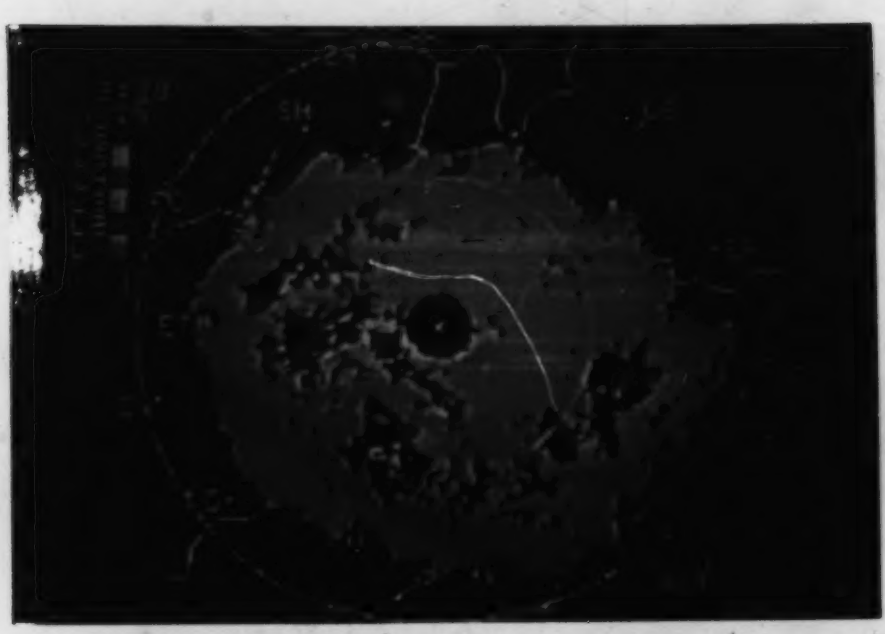

Figure 2.7 Radar scan of heavy precipitation south and west of the Carvel site, July 17, 1986 at 1240Z (06:40 MDT).

Figure 2.8 Detail of radar scan of bands of heavy precipitation NW and SE of the site, July 17, 1986 at 1938Z (13:38 MDT).

3. CASE STUDY #1 : THE SPRING SNOW STORM OF MAY, 1986

3.1 Introduction

The purpose of this case study is to examine cloud patterns on satellite images and correlate them with synoptic features such as lows, troughs and trowals as well as with the distribution of precipitation, vorticity and vertical velocity. A tape of radar data from this storm was unfortunately erased before it could be obtained for this study.

3.2 Synoptic Description

3.2.1 May 13, 1986

Figure 3.1 (May 12, 1986 1200Z) shows the cold low centre at 521 decametres (dam) over the Gulf of Alaska. By May 13, 0000Z, 12 hours later, the low centre has filled to 524 dam and moved southeastward toward the coast of British Columbia (B.C.), just north of the Queen Charlottes, at about 17 knots (Fig. 3.2).

Twelve hours later (1200Z May 13), the 500-mb cold low had filled to 526 dam (Fig. 3.3) and moved southeastward into Central B.C. at about 20 knots, while the vorticity centre decelerated to a mean speed of about 17 knots.

Vigorous positive vorticity advection is occuring over southern B.C. and in the Lee of the Alberta Rockies.

The 500-mb vorticity advection field can be estimated from the area of quadrilaterals and parallelograms formed by the intersecting height contours and vorticity isopleths. The smaller and more numerous the parallelograms, the stronger the vorticity advection is likely to be.

As the cold, unstable maritime air masses moved into central B.C. later in the day, a new surface low centre of 995 mb developed over northern B.C. (not shown here) and began moving southeastward at about 15 knots. Figure 3.4 shows that the low subsequently filled to 997 mb, while a broad, deepening trough spread across most of Alberta, a forerunner of

impending Lee Cyclogenesis.

By 1200Z May 13, the low had deepened to 994 mb and moved from Central B.C. to Lesser Slave Lake and the Peace region, as seen in Figure 3.5. Simultaneously, a second low (994 mb) developed rapidly between Whitecourt and Red Deer. Both of these systems moved southeastward at about 20 knots to the Coronation region by late in the day, where they amalgamated into a single active low (Fig. 3.9).

Figures 3.6 and 3.7 are the infrared and visible images, respectively, of orbit 7299 at 2047-2102Z on May 13, 1986.

In Figure 3.6 the Cumulonimbus (Cb) and Towering Cumulus (TCu) clouds have a bright, white tone in area A. The cloud tops in area C are not high as those of the Cb at A, but the embedded convective cells are producing scattered showers in the Coronation district.

In the visible image (Fig. 3.7), the cloud band consisting largely of Cb and TCu clouds in area A has very white uniform tops. Altocumulus (Ac) appears white in area B due to its high reflectivity but, being middle cloud, shows a mottled grey in the infrared images. The light grey shades joining the brighter masses of Cb, Cu and Ac at C, D, E and F suggest that thin Cirrostratus (Cs) cloud lies over the mid-level cloud. The cloud arc associated with vorticity advection at the 500-mb level has a marked cyclonic curvature (A-C-D-E-F).

The 1800Z surface chart (not reproduced here) shows overcast skies with light rain showers at Jasper (WJA) and obscured sky conditions with light snow at Banff (WBA). At Calgary (YYC), the surface pressure had dropped to 993.9 mb, broken TCu and Ac fill most of the sky, and the Radar shows Acc tops to 16,000 feet to the northwest. Numerous showers are being reported by the station in southern B.C.

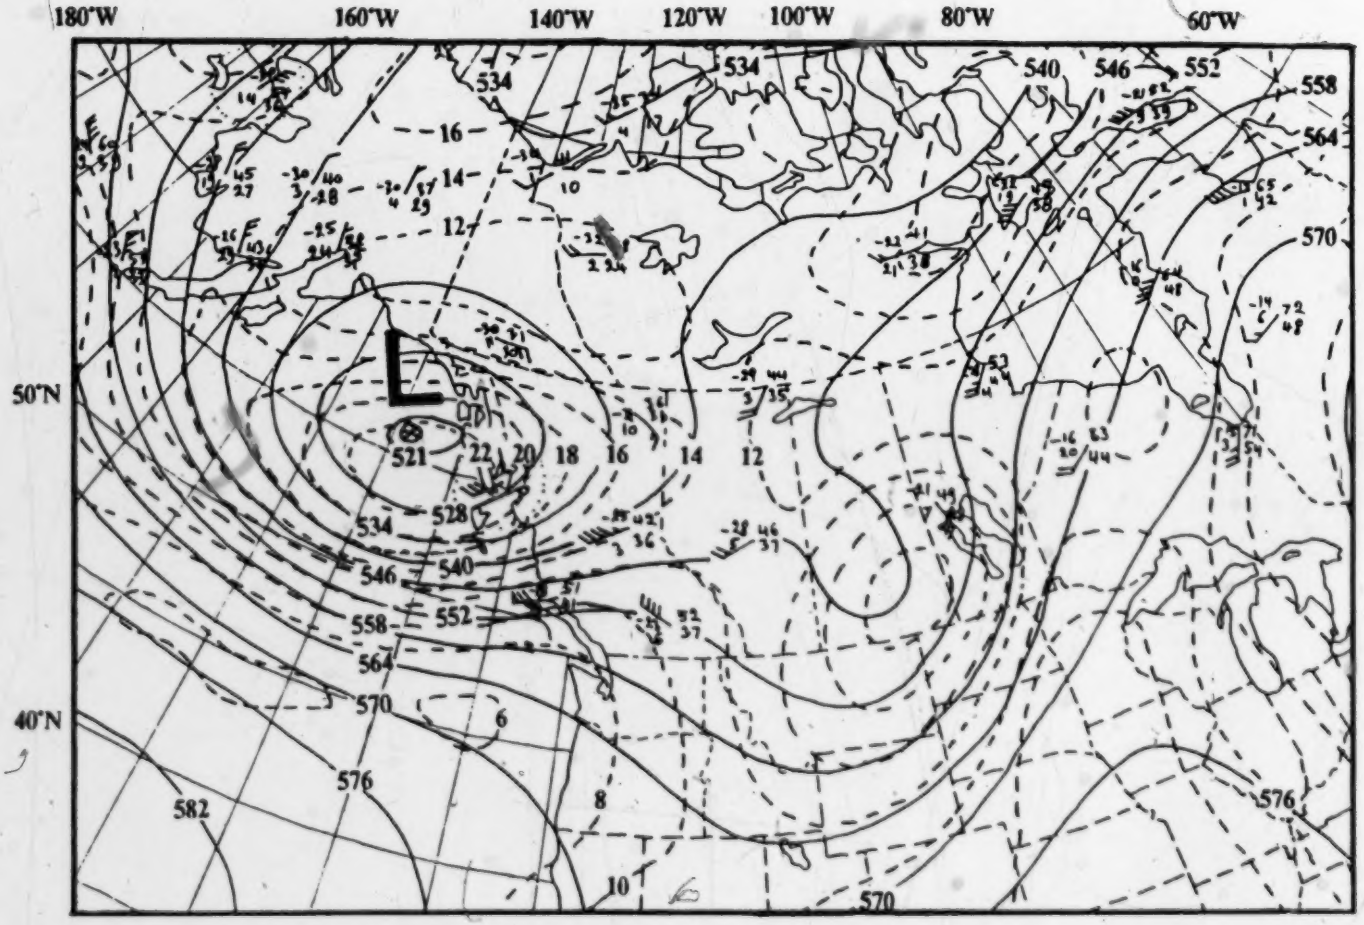

Figure 3.1 500-mb map for 1200Z May 12, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

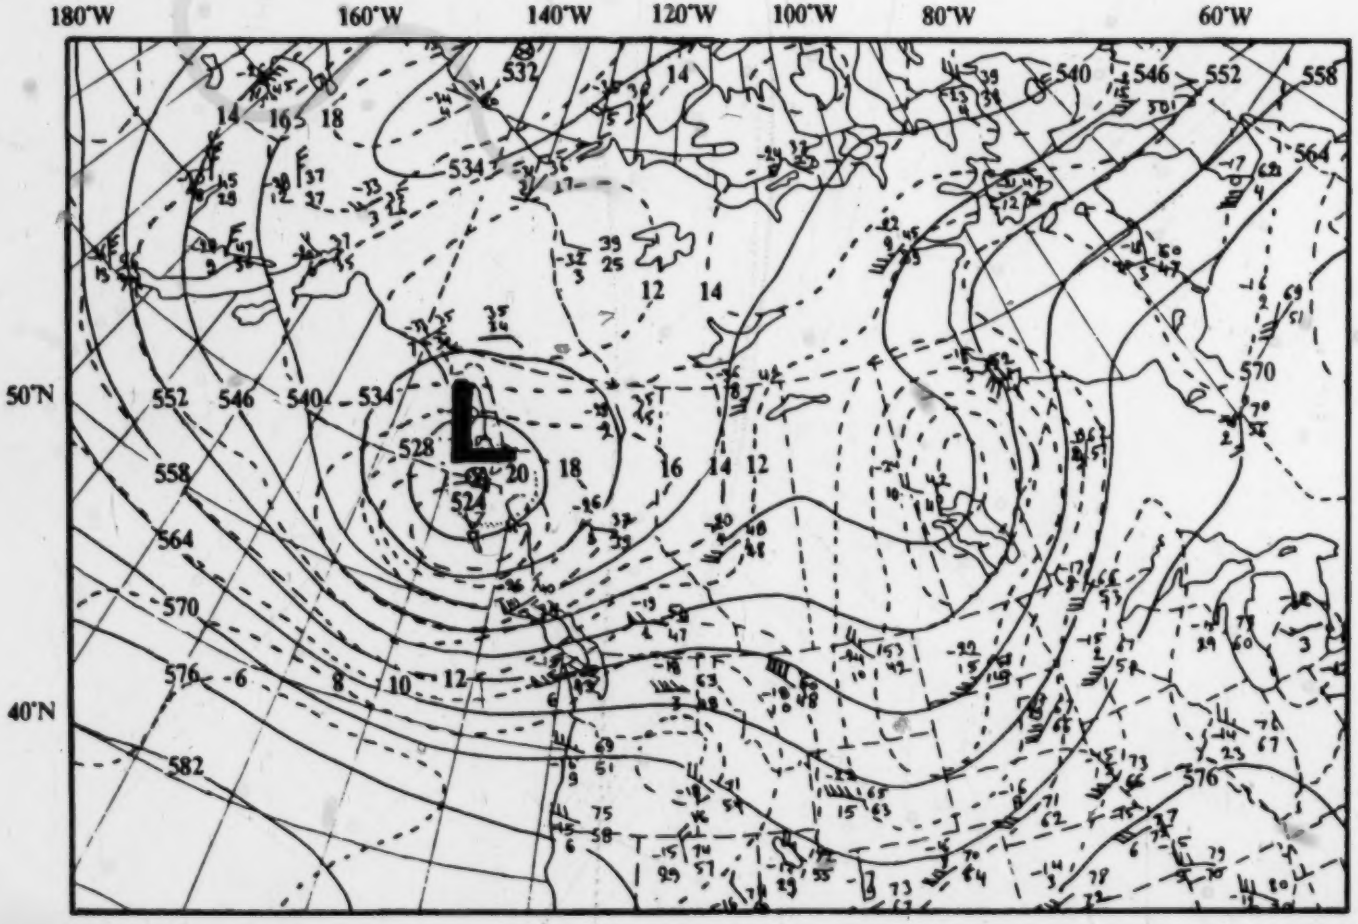

Figure 3.2 500-mb map for 0000Z May 13, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

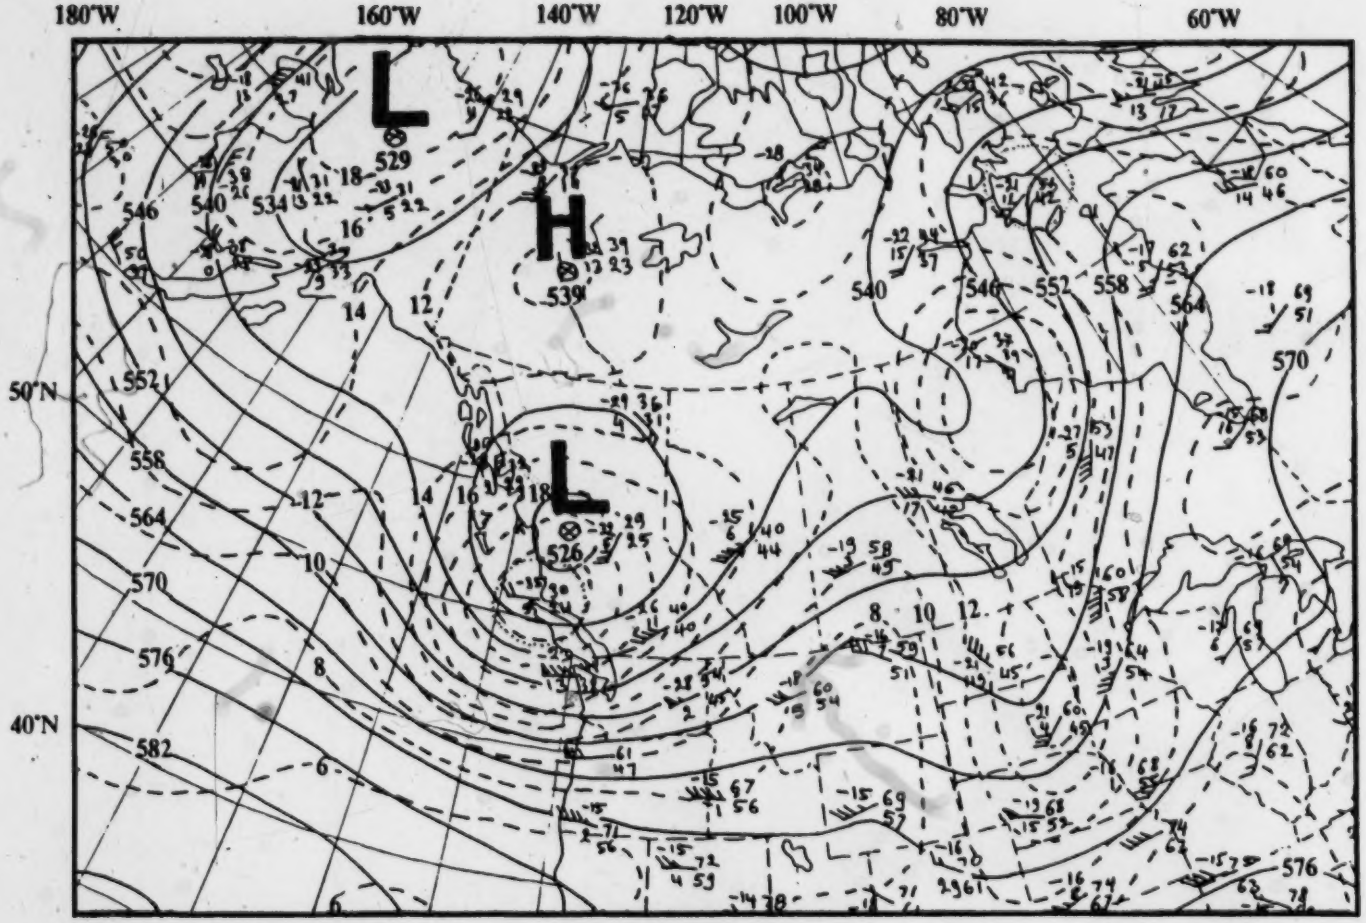

Figure 3.3 500-mb map for 1200Z May 13, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

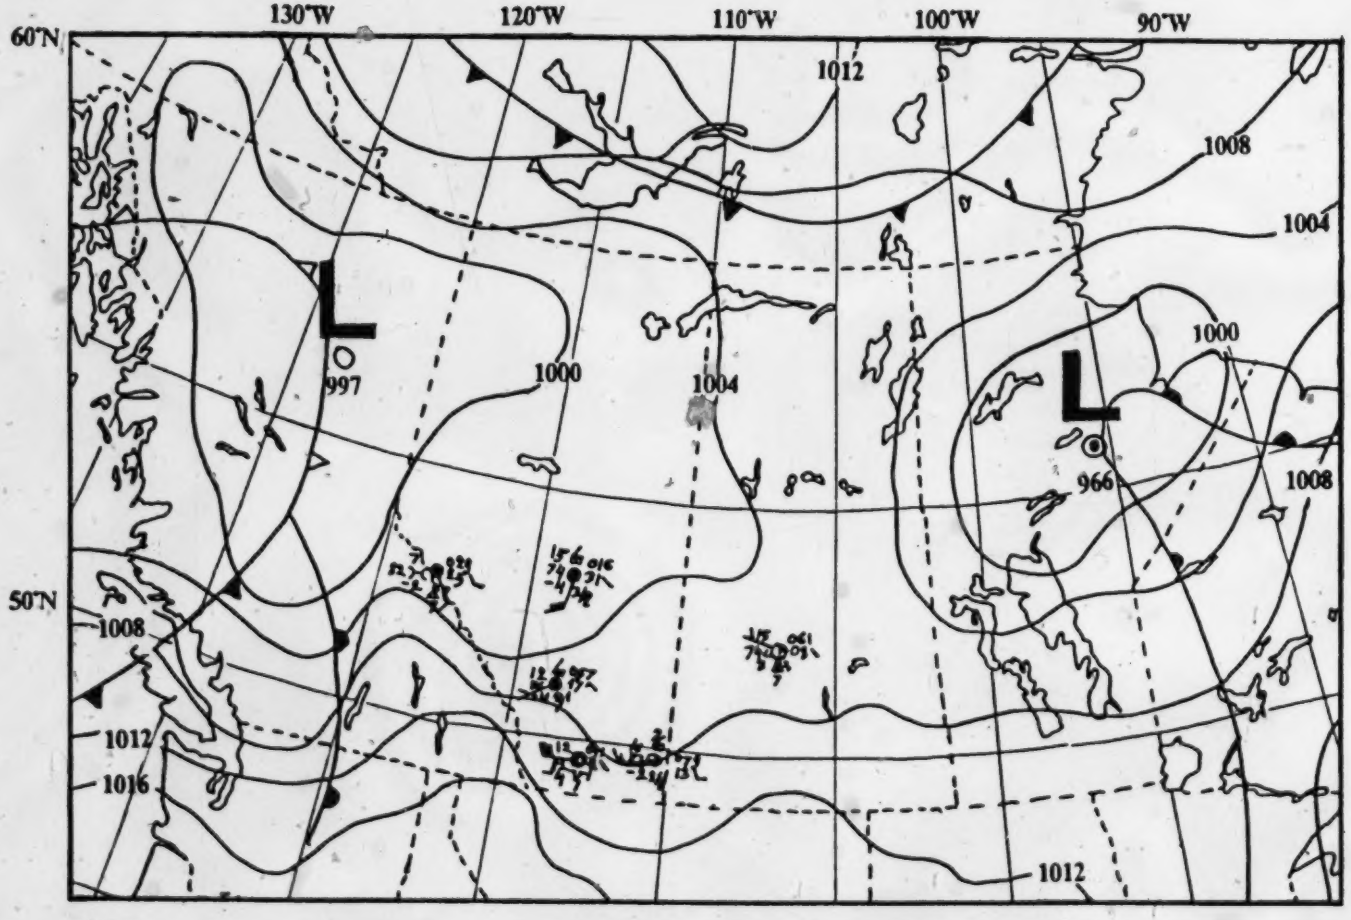

Figure 3.4 Surface Analysis map for 0000Z May 13, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

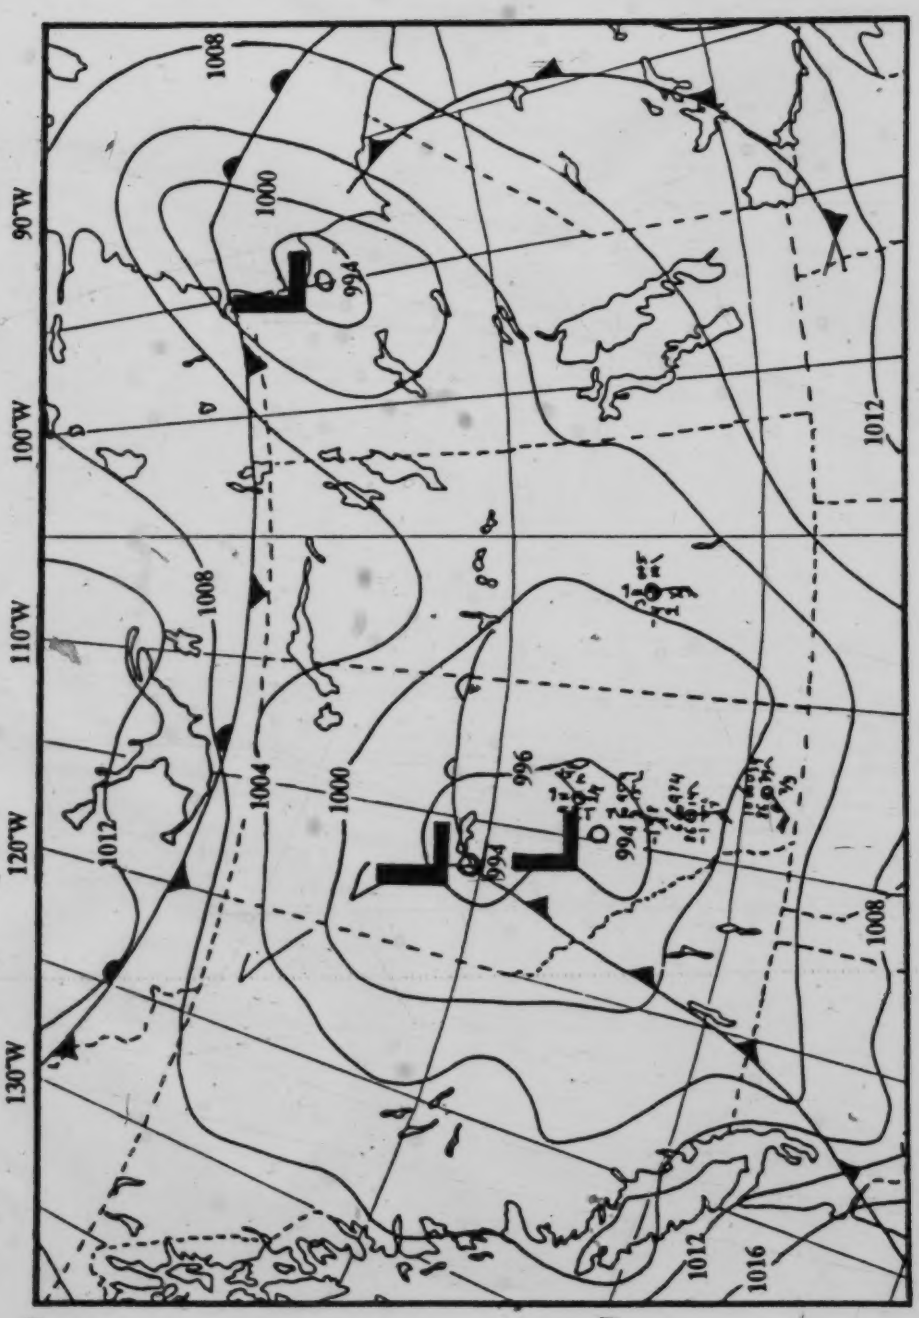

Figure 3.5 Surface Analysis map for 1200Z May 13, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

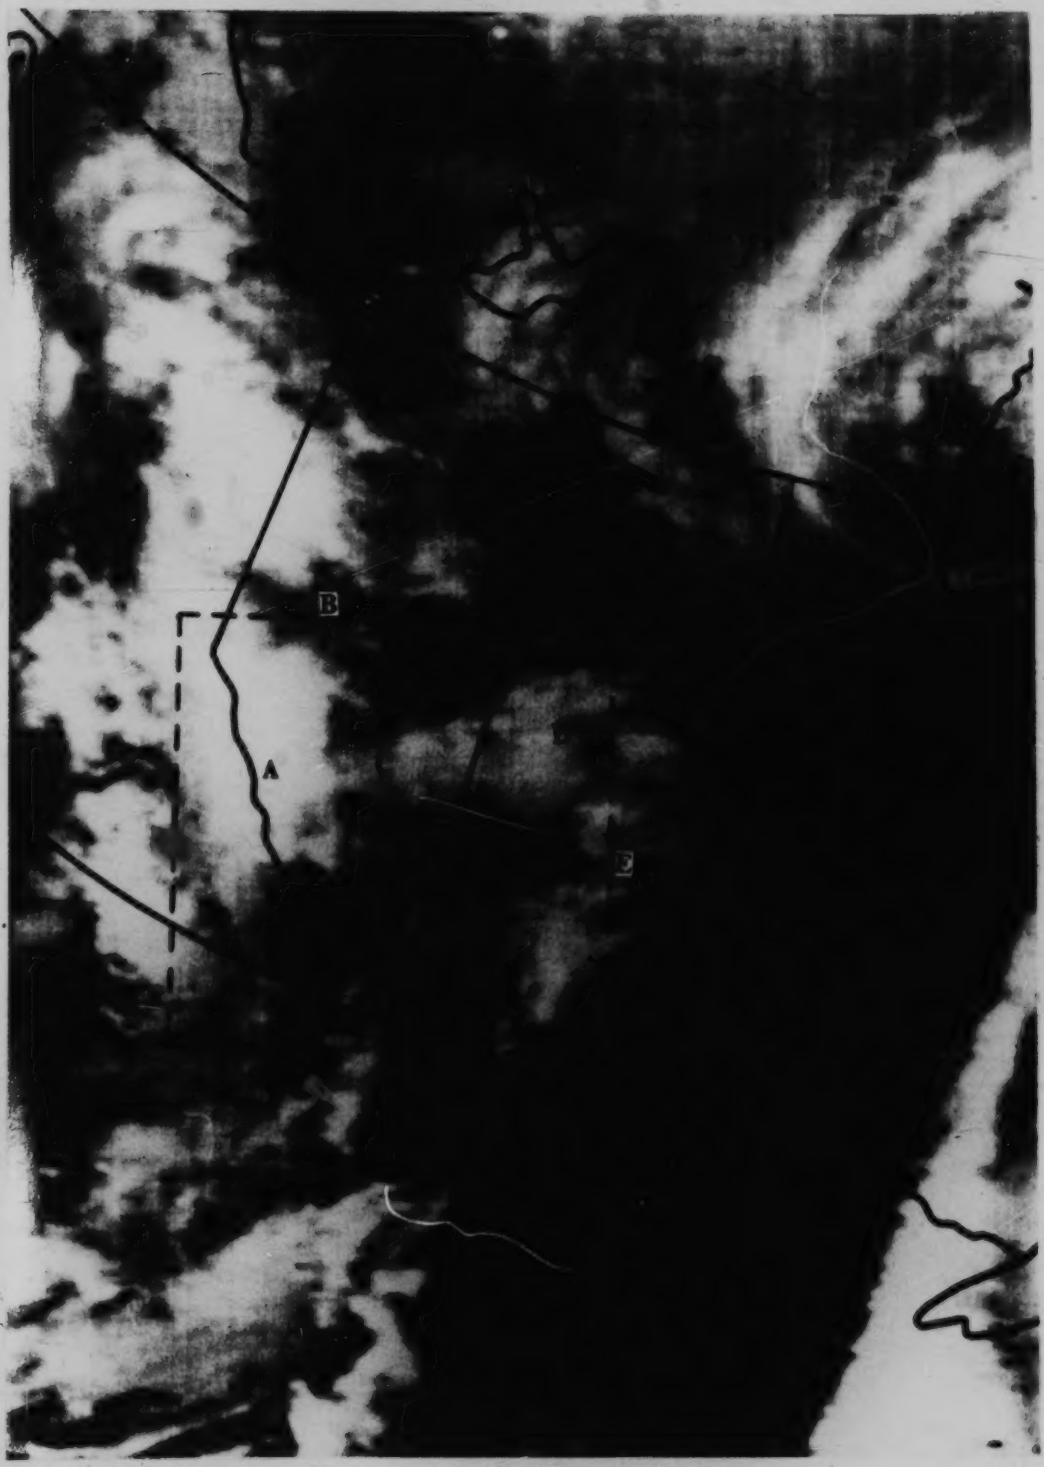

Figure 3.6 Infrared Image of May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299.

Figure 3.7 Visible Image of May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299.

3.2.2 May 14, 1986

The 500-mb chart of May 14, 0000Z (Fig. 3.8) drawn about 3 hours after the satellite image was recorded, shows the vorticity centre over southern B.C. with a strong cyclonic circulation over Washington, Idaho and Montana, and rapid cold-air advection over southern B.C. and Alberta.

Located near Jasper, the cold low has filled to 536 dam and moved southeast at about 24 knots, preceded by the vorticity maximum at about 27 knots. Since the trough is concave to the flow, southward transport of momentum results in strengthening of the westerlies at the south end of the trough, while maintaining strong diffluence to the east of the trough line.

By May 14, at 1200Z, the 500-mb low had moved into southeastern of Alberta at about 25 knots, and filled to 535 decametres over the Medicine Hat area (Fig. 3.9) while the associated vorticity centre moved southeast at 26 knots.

During this 12-hour period, 0000Z (Fig. 3.10) to 1200Z May 14, the southern surface low became dominant and the resulting single vortex turned sharply southward to just North of Medicine Hat, intensifying and deepening to 990 mb, directly below the 500-mb cold low (Fig. 3.11).

The satellite images of May 14, confirm that intense lee cyclogenesis has taken place in southeastern Alberta. On the infrared image (Fig. 3.12), the well-developed cloud spiral includes several very bright convective bands, indicative of very high and cold cloud tops. The vortex centre C of the spiral, an area of mottled grey, contains lower bands of middle cloud, better resolved in the visible image (Fig. 3.13)

In this image, the section of the cloud spiral associated with the cold front has a well-defined rear edge, behind which there is a clearing zone A. The forward edge of the cloud mass is diffuse. South of area B, Cirrus (Ci) plumes trailing from the cloud spiral are clearly visible. The lines of Cu and TCu at A that curve toward the vortex centre, now an open, cellular cloud field, have developed within the cold maritime air in the region of cyclonic vorticity maximum at C. Altocumulus (Ac) and Stratocumulus (Sc) are reported in

surface observation at B. In the visible image these clouds are very bright and have a wavy structure.

The centre of the cloud vortex coincides with the centre of the surface cyclone at 1800Z, 3 hours before the satellite pass (not shown here). This cloud structure is typical of well-developed, moving cyclones (pressure at the centre was 996 mb) with speeds of about 25 knots.

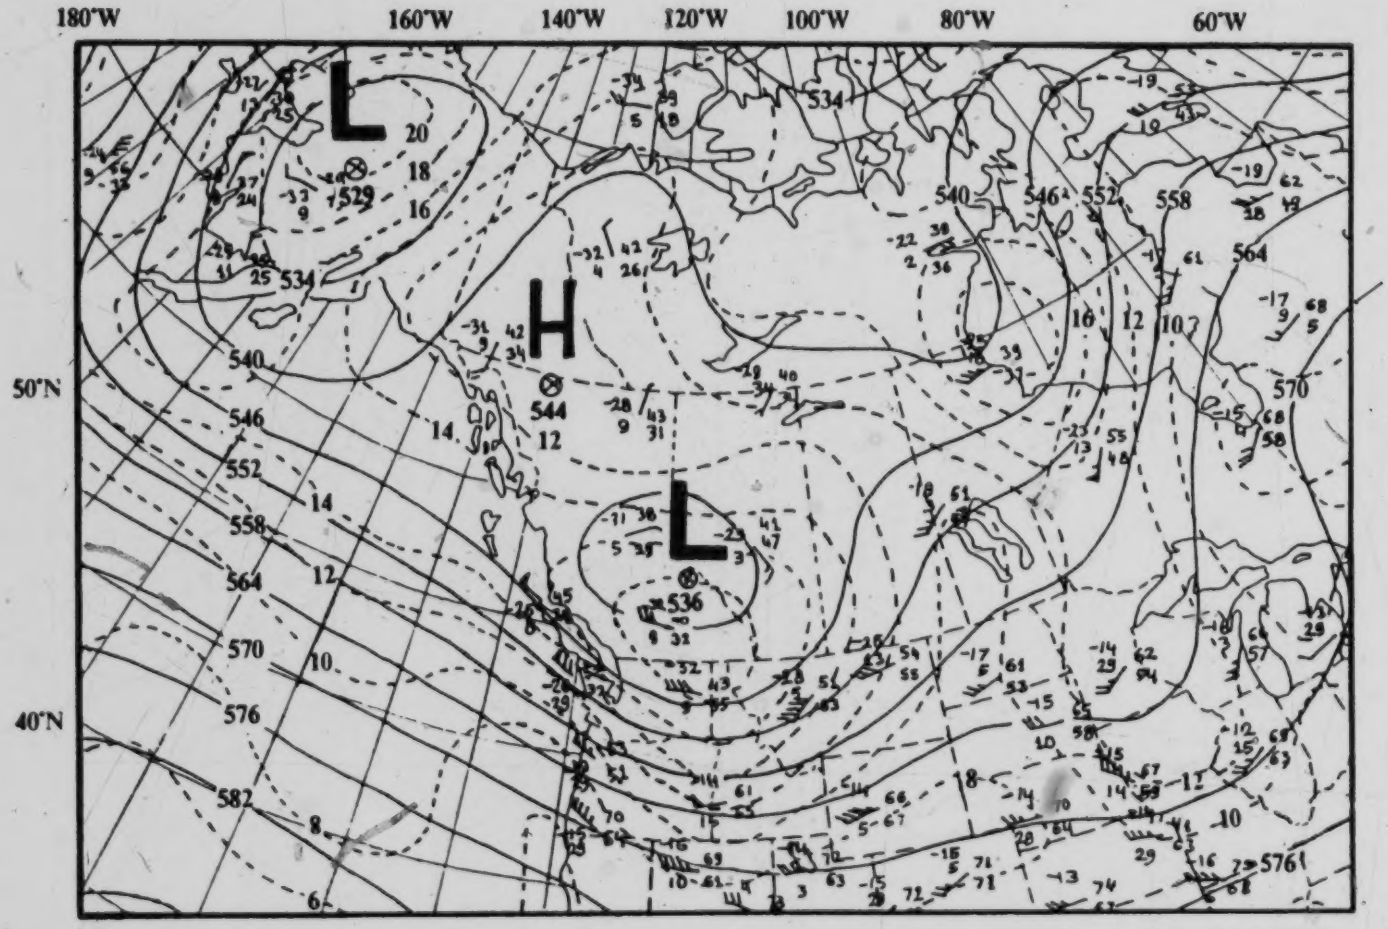

Figure 3.8 500-mb map for 0000Z May 14, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

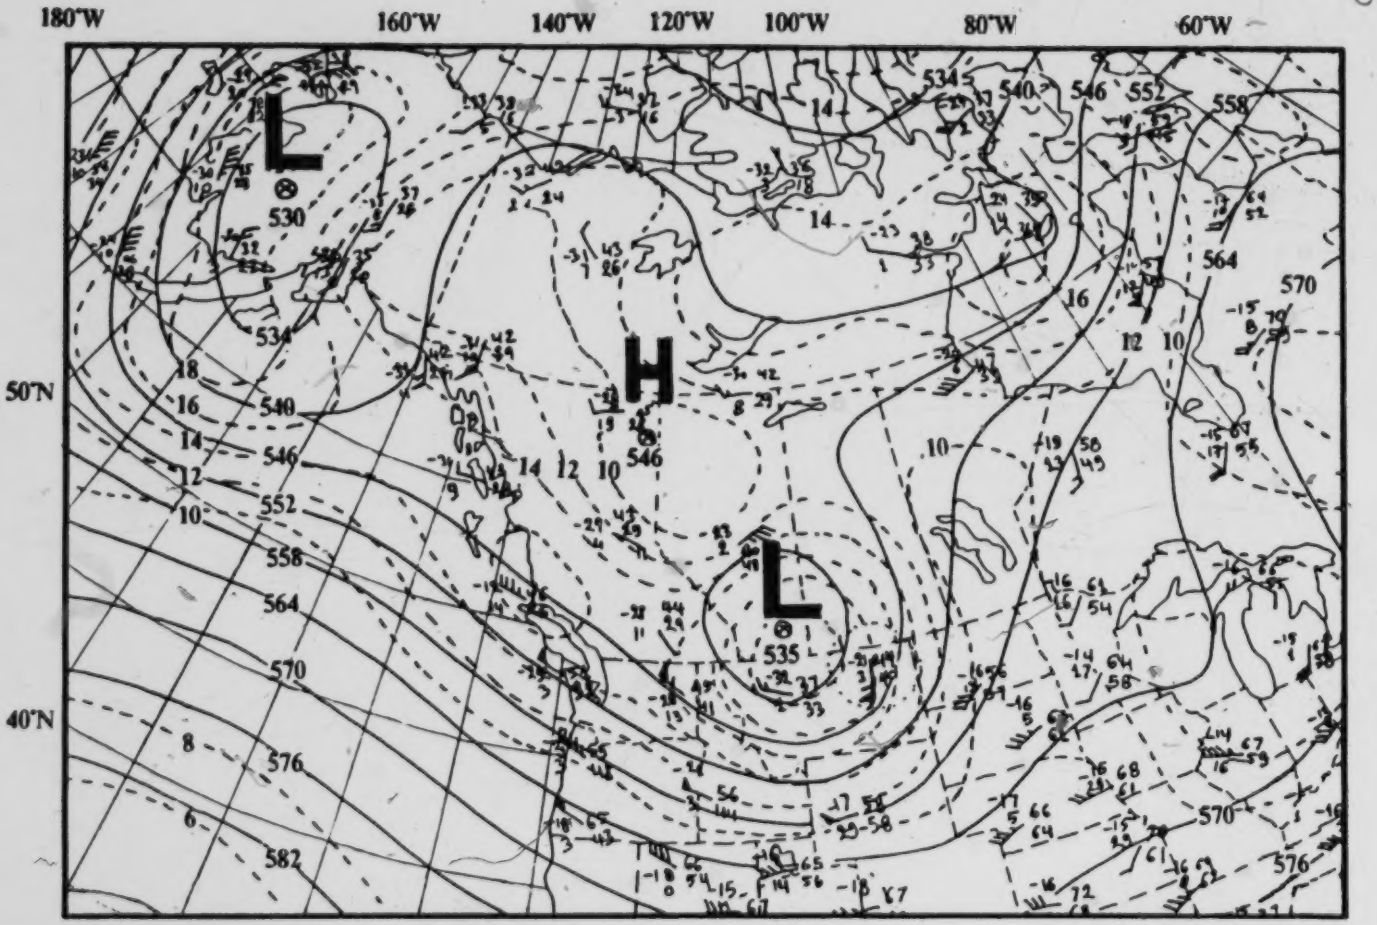

Figure 3.9 500-mb map for 1200Z May 14, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

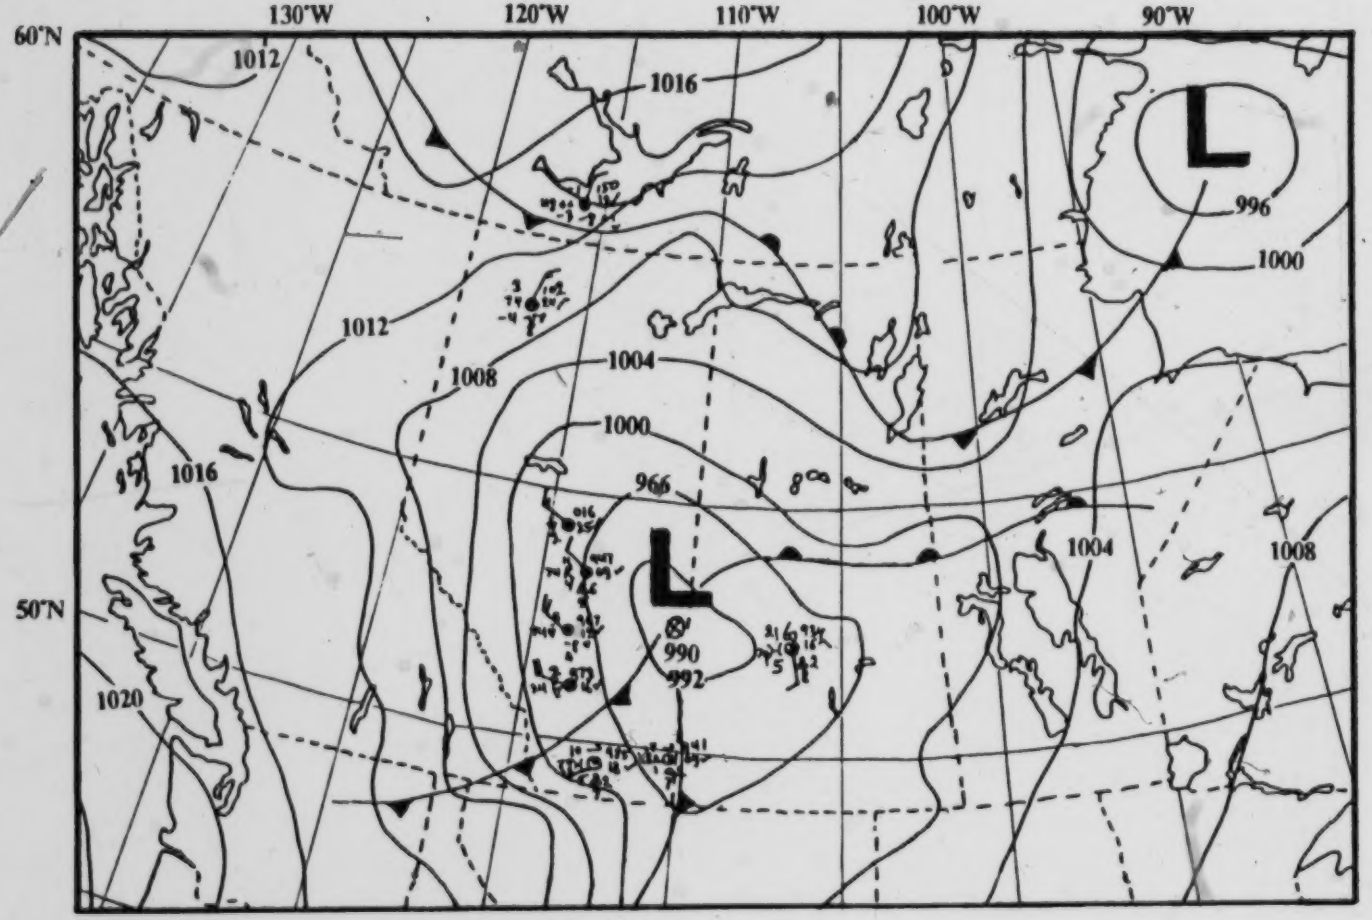

Figure 3.10 Surface Analysis map for 0000Z May 14, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

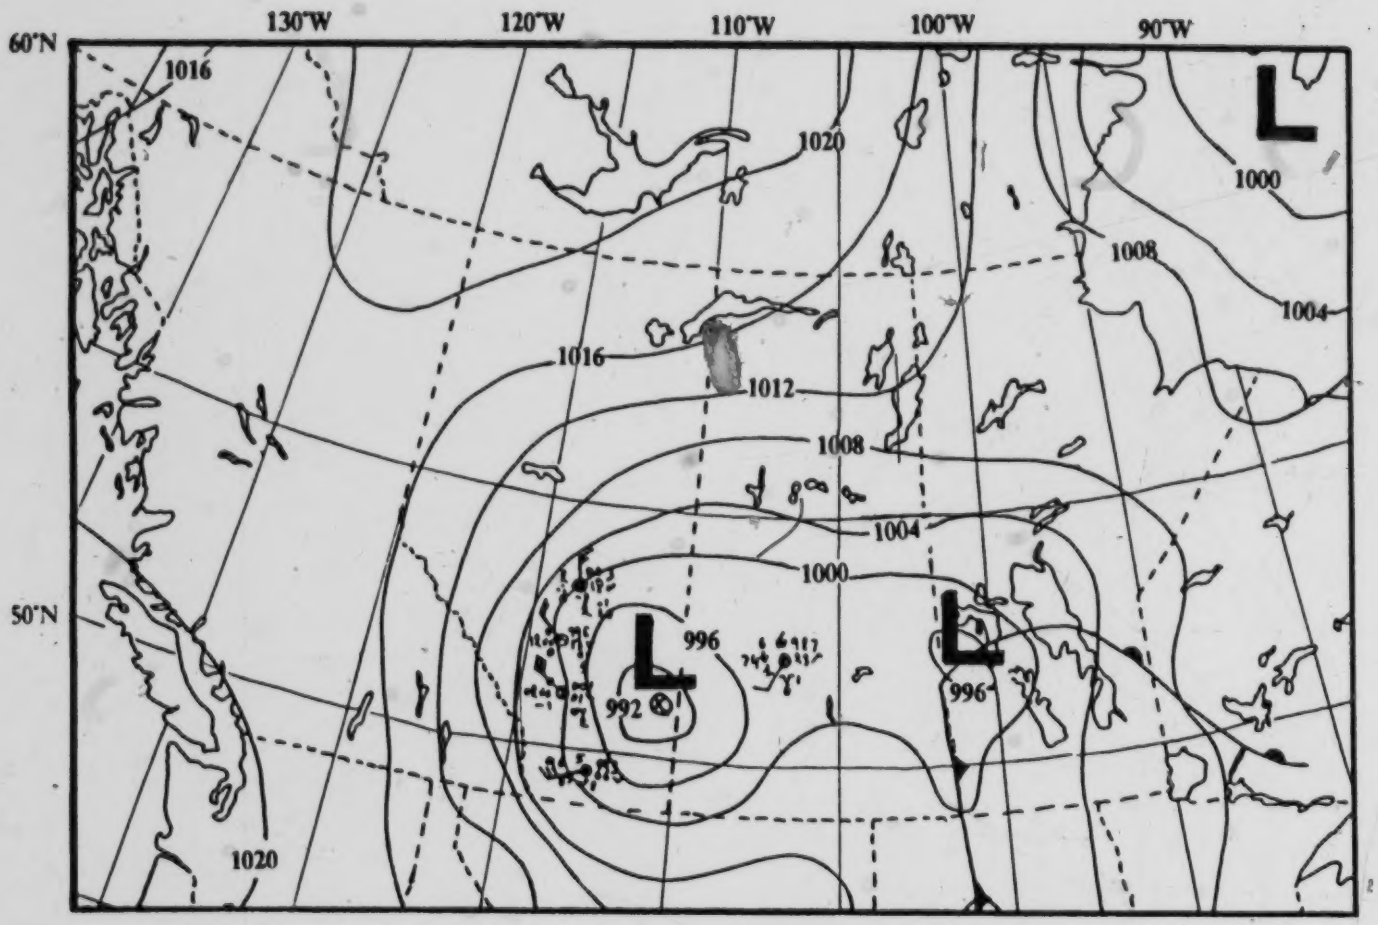

Figure 3.11 Surface Analysis map for 1200Z May 14, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

Figure 3.12 Infrared Image of May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313.

Figure 3.13 Visible Image of May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313.

3.2.3 May 15, 1986

The 500-mb map of May 15, 0000Z (about 3 hours after the satellite pass) shows the southeastward shift of the vortex centre (Fig. 3.14). The speed of the cold low has dropped to 14 knots and the speed of the vorticity centre to 17 knots. The low is now centred in southwestern Saskatchewan with a tilted trough NW-SE, and a strong southerly circulation over Manitoba.

By May 15 (1200Z), the cold trough had drifted very slowly to the east (Fig. 3.15) at about 4 knots. It continued to move toward northern Saskatchewan and had filled to 539 decametres by the afternoon of May 15.

The surface low has also moved into southern Saskatchewan at about 10 knots and had a central pressure of 995 mb by 0000Z May 15 (Fig. 3.16). During the next 12 hours it continued northeastward, filling to 997 mb by the early morning of May 15, (Fig. 3.17). The cyclone has now reached maturity and is beginning to dissipate (Figs. 3.18 and 3.19). The main cloud band of the occlusion has shifted to northern Saskatchewan and northeastern Manitoba.

Figure 3.18 shows the main branch of the spiral north-northeast of the vortex centre, now located East of Regina. The cellular cloud pattern indicates cold air advection and cyclonic flow in the lower levels behind the cold front. The larger cumuliform cloud elements (A) represent a region of upward vertical motion in advance of the vorticity centre.

The brightness from E to D in both marks a band of Cirrostratus (Cs) and Altostratus (As) with streamers of Ci over Hudson Bay. The dark grey area at F and H in the infrared (Fig. 3.18), but bright in the visible picture (Fig. 3.19), indicates broken low cloud, such as Sc. The light grey shades in the IR at C and G, but also bright in the visible, consist largely of middle cloud (As and Ac) above a deck of St and Sc.

Figure 3.18 also shows a cellular cloud pattern of Cu at B1 that is lower than the Cu and TCu cloud at B2 whose elements are both larger and brighter.

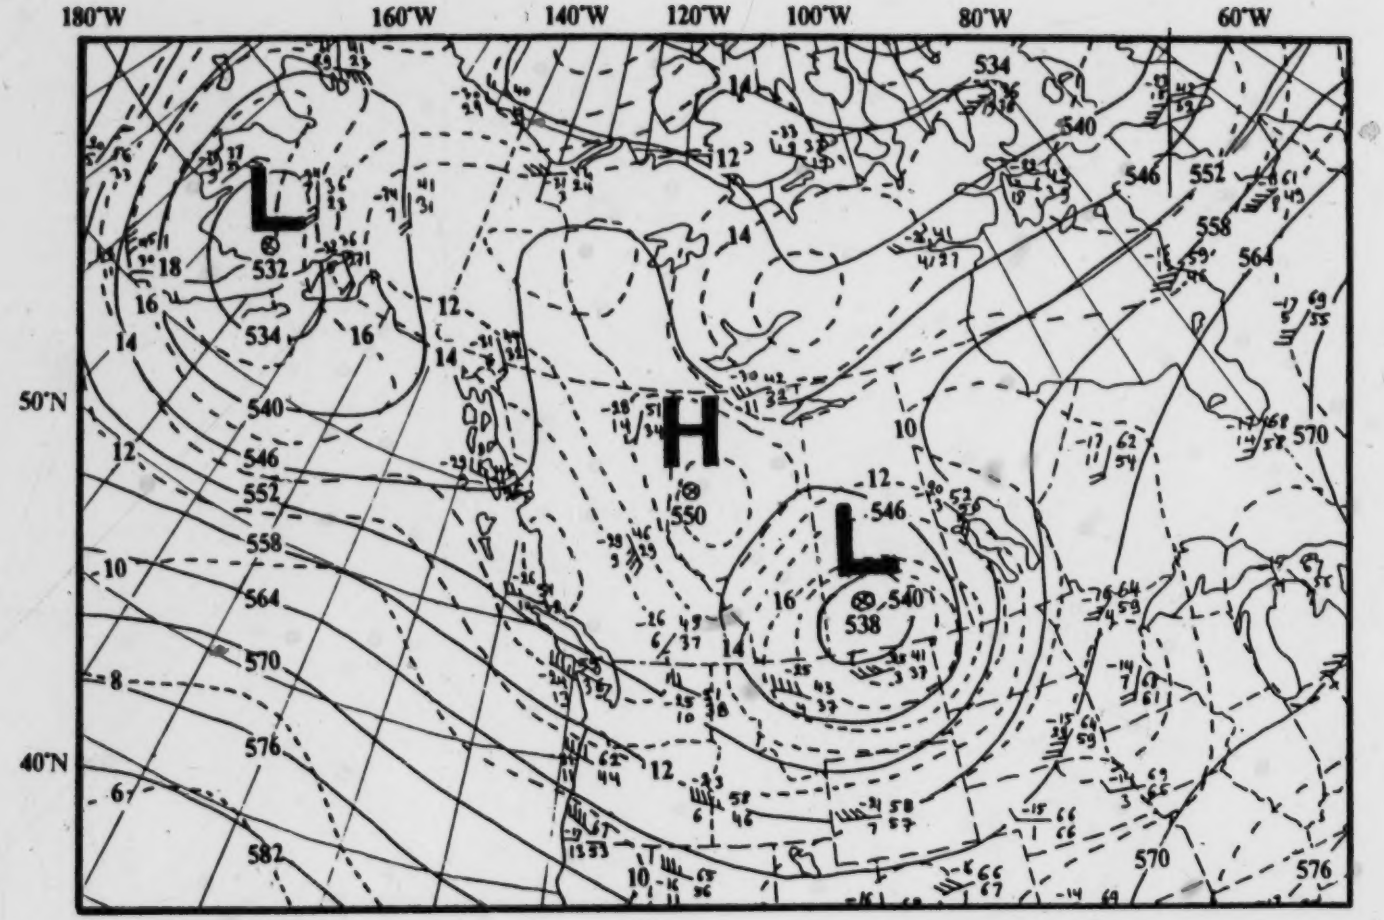

Figure 3.14 500-mb map for 0000Z May 15, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

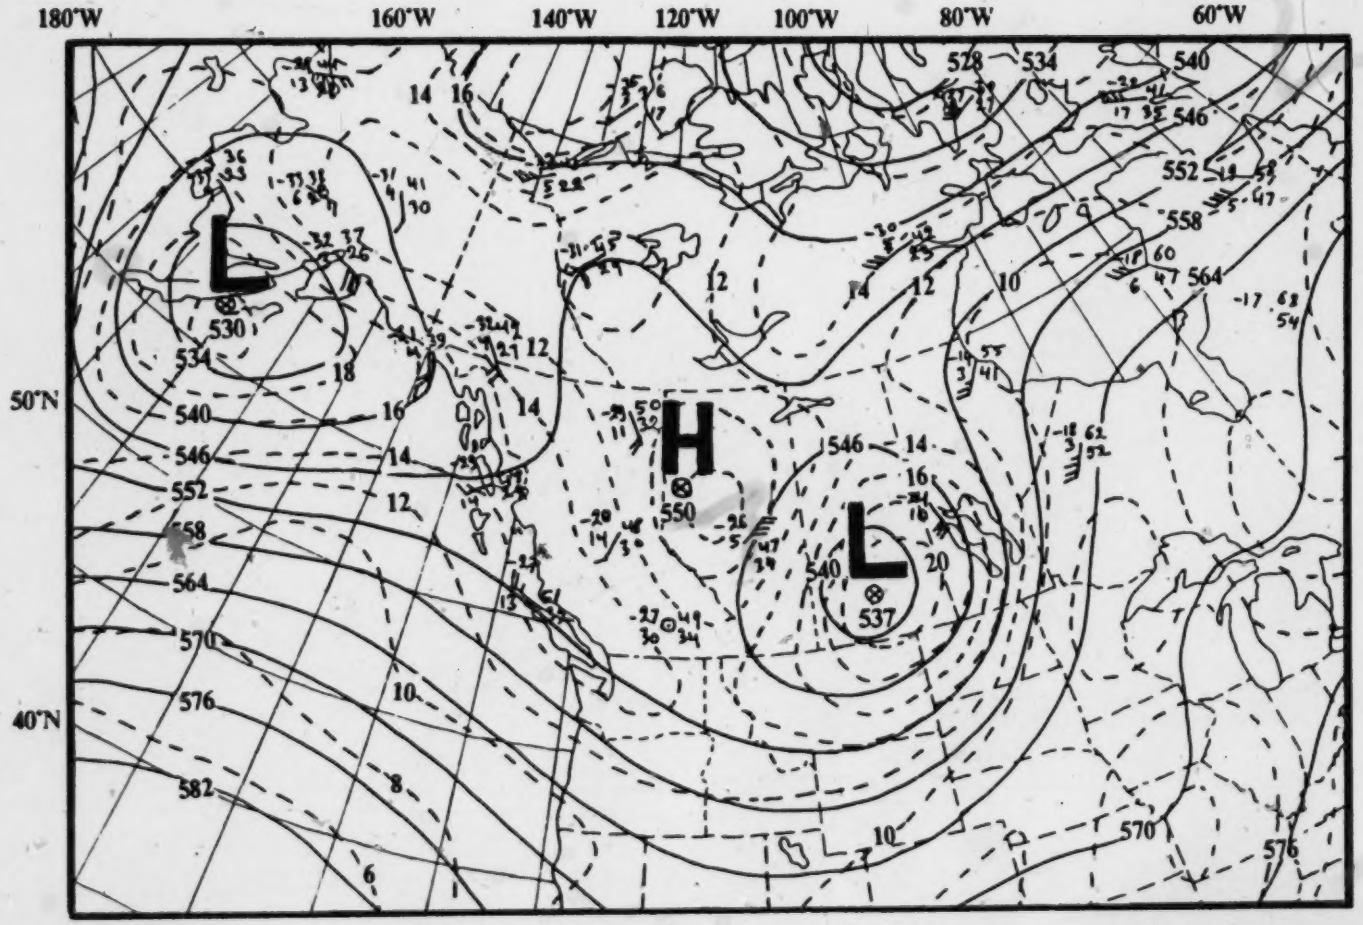

Figure 3.15 500-mb map for 1200Z May 15, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

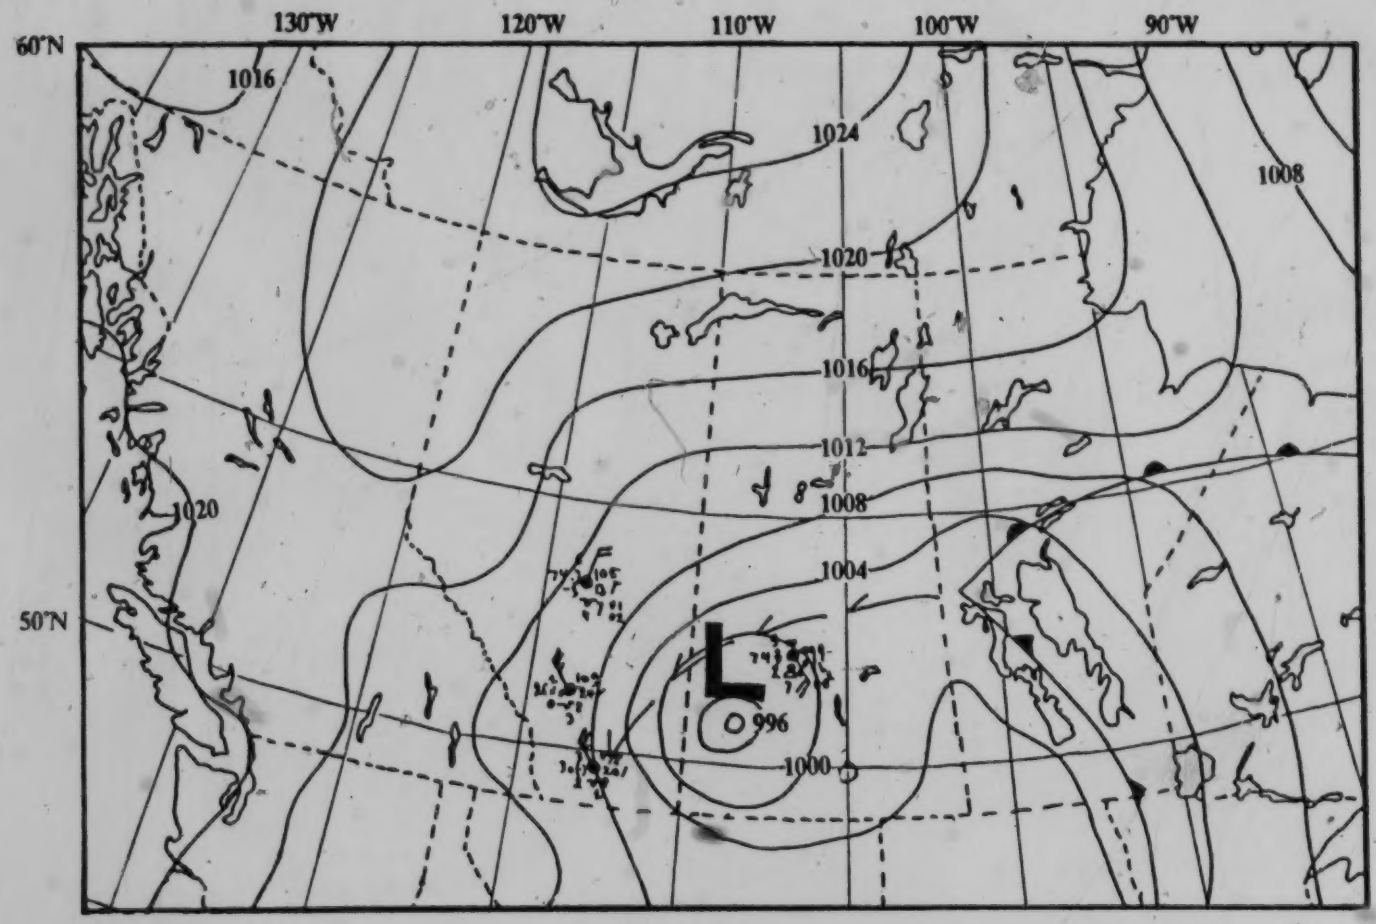

Figure 3.16 Surface Analysis map for 0000Z May 15, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

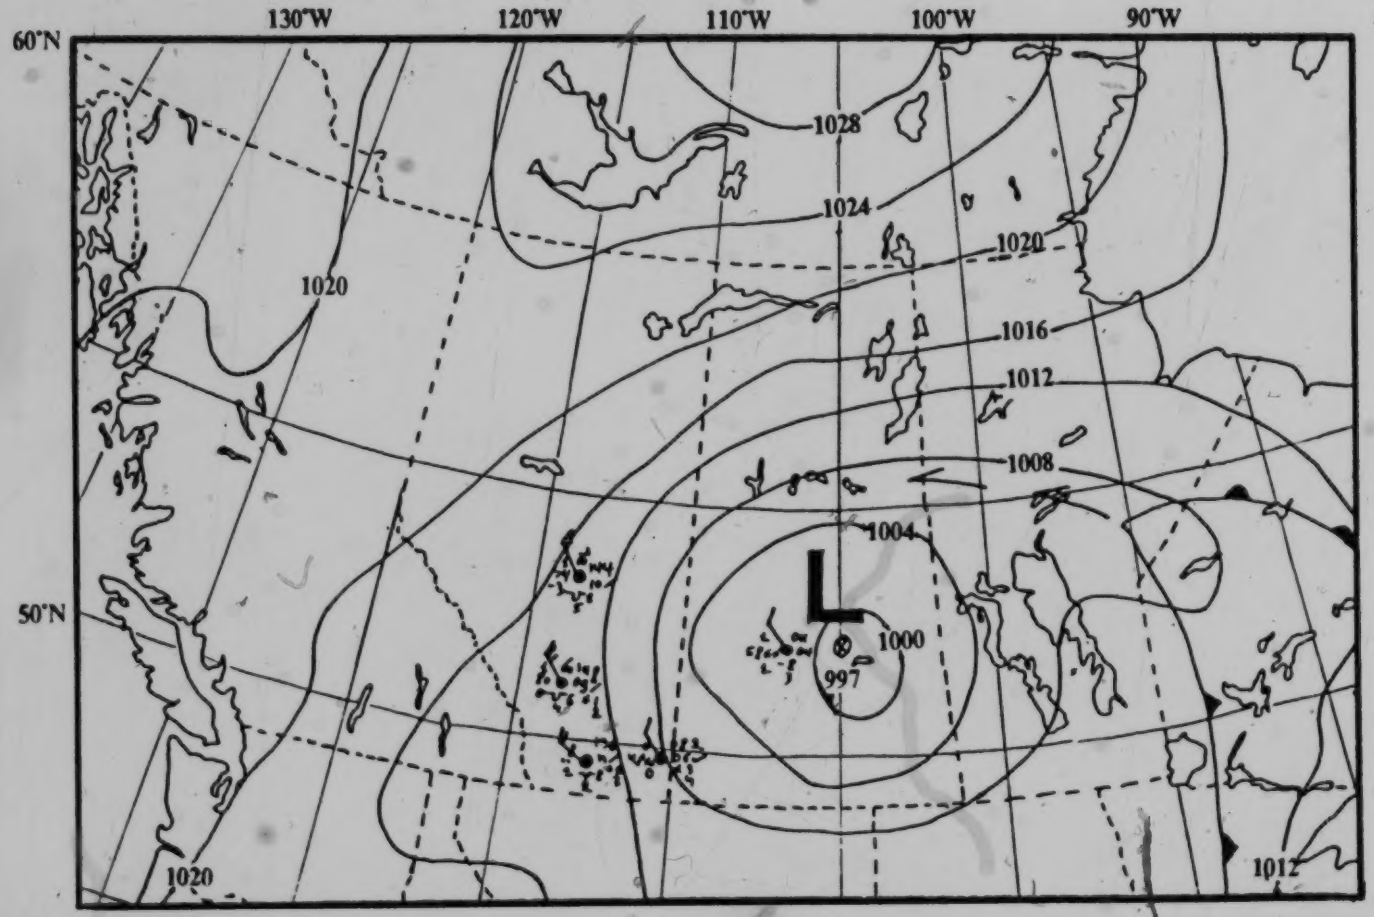

Figure 3.17 Surface Analysis map for 1200Z May 15, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

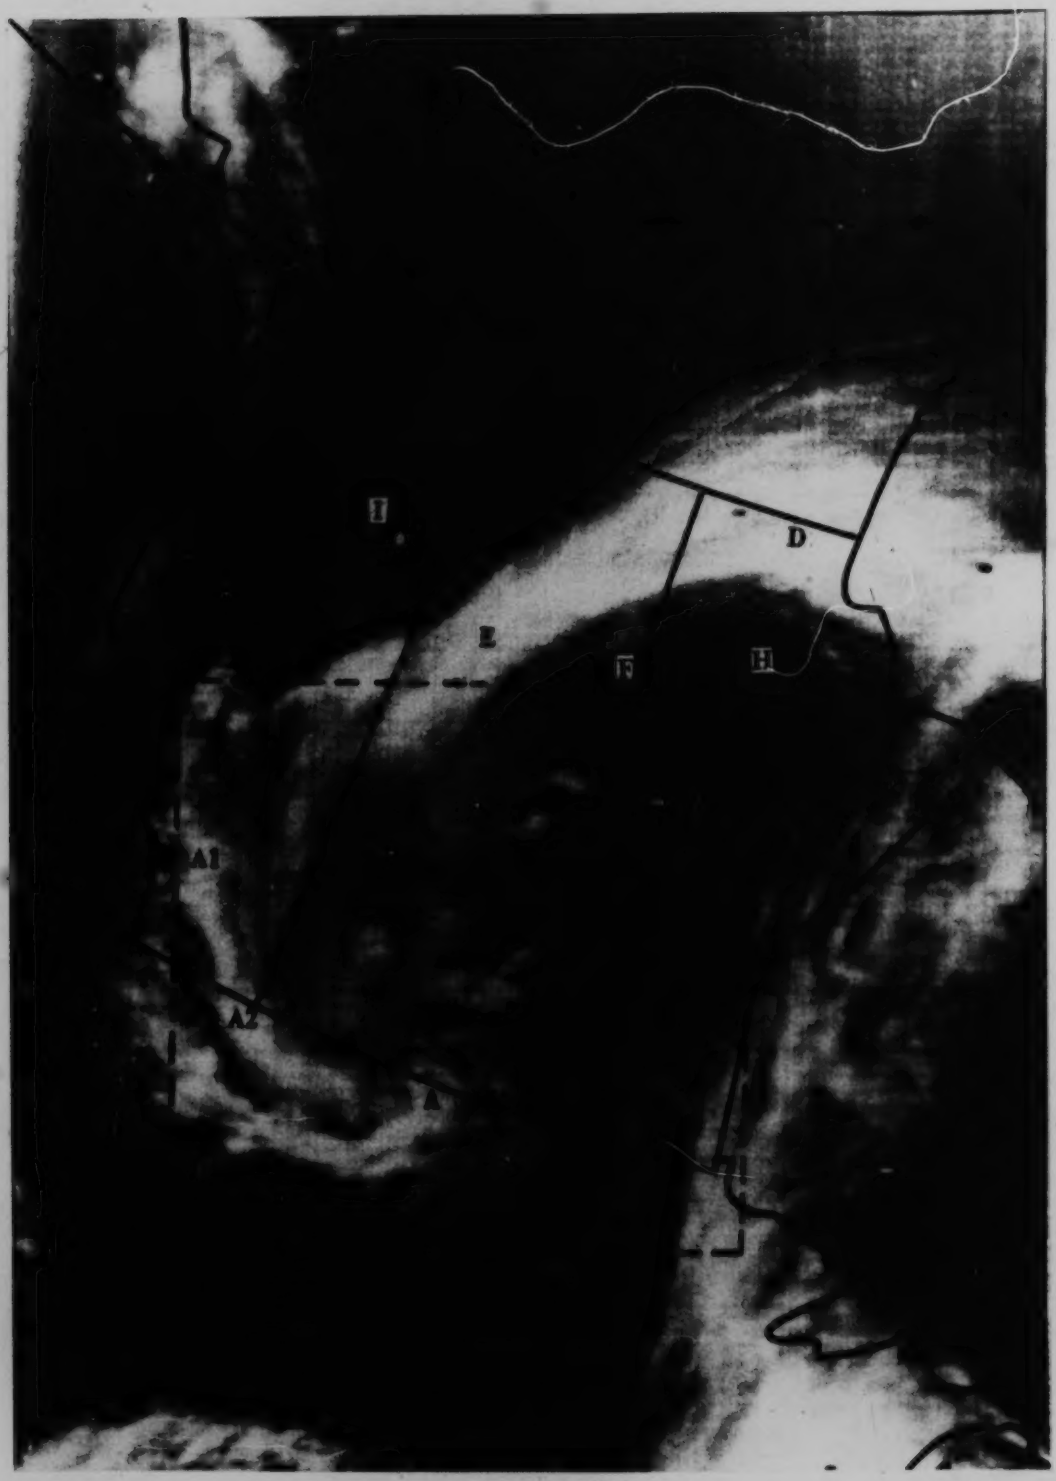

Figure 3.18 Infrared Image of May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327.

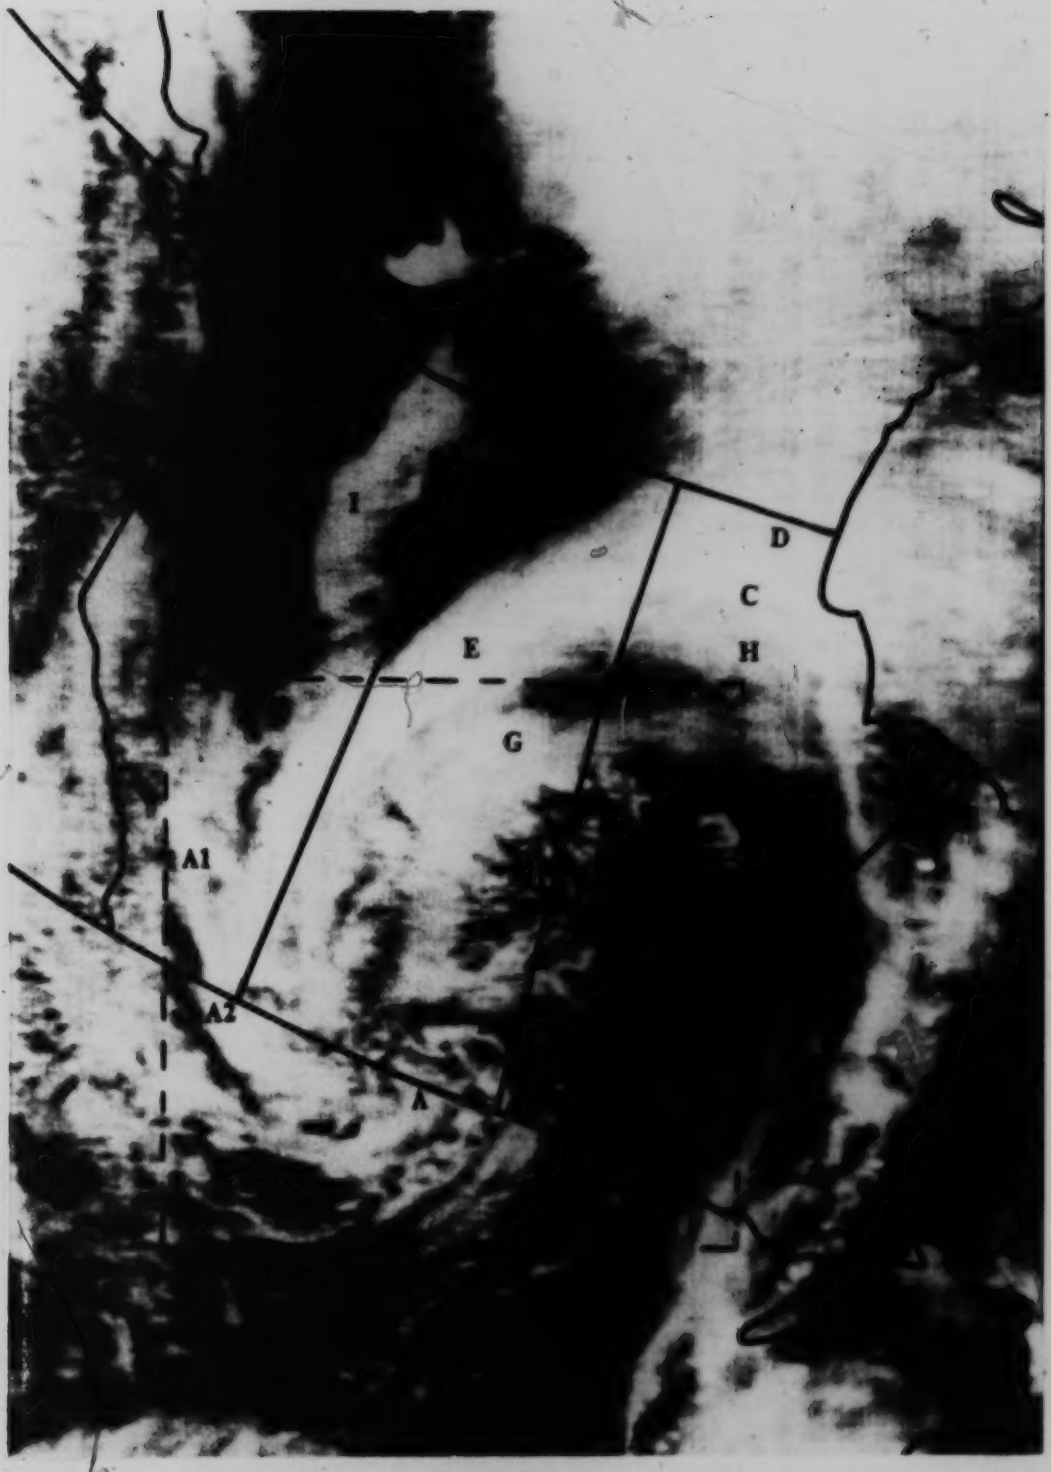

Figure 3.19 Visible Image of May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327.

3.2.4 May 16, 1986

During the next 12 hours, the speed of the cold low dropped to to 5 knots, while the vorticity centre weakened further and slowed to 7 knots. The low reached Central Manitoba by the early morning of May 16 (Fig. 3.20), had degenerated into a trough 12 hours later (Fig. 3.21)

The surface low reached the eastern border of Saskatchewan by 0000Z on May 16 (Fig. 3.22), and filled to 1004 mb; it moved to Central of Manitoba by the early morning on May 16 (Fig.3.23) at about 18 knots and soon thereafter lost its distinct, cyclonic character by being incorporated into an amorphous trough extending westward from Ontario.

The vortex cloud of the dissipating cyclone moved northeastward and was located just east of Lake Winnipeg 24 hours later (Figs. 3.24 and 3.25).

The NW-SE extended cloud band is associated with high Ci, apparent by the uniform bright tone in both displays between between 53°N, 123°W and 60°N, 127°W in area A.

On the visible image (Fig. 3.25), area C is brighter than the surrounding cloud while in the IR (Fig. 3.24) it is darker, indicating the presence of Stratocumulus clouds.

Figure 3.24 shows that in areas G and H, cold high clouds sharply contrast with the warmer Sc. The clouds in the area H are decayed Cb anvils. This is indicated by the gray response in the visible and nearly white shade in the infrared pictures. The Cb tops are very bright in both displays, indicating an area of active thunderstorms. The medium gray shade in the infrared picture (D, E, F) indicates the presence of several cloud layers in these areas.

At G, the relatively thin Cirrus has a low albedo in the visible picture, so there is very low contrast between areas covered with thin Cirrus and clear areas.

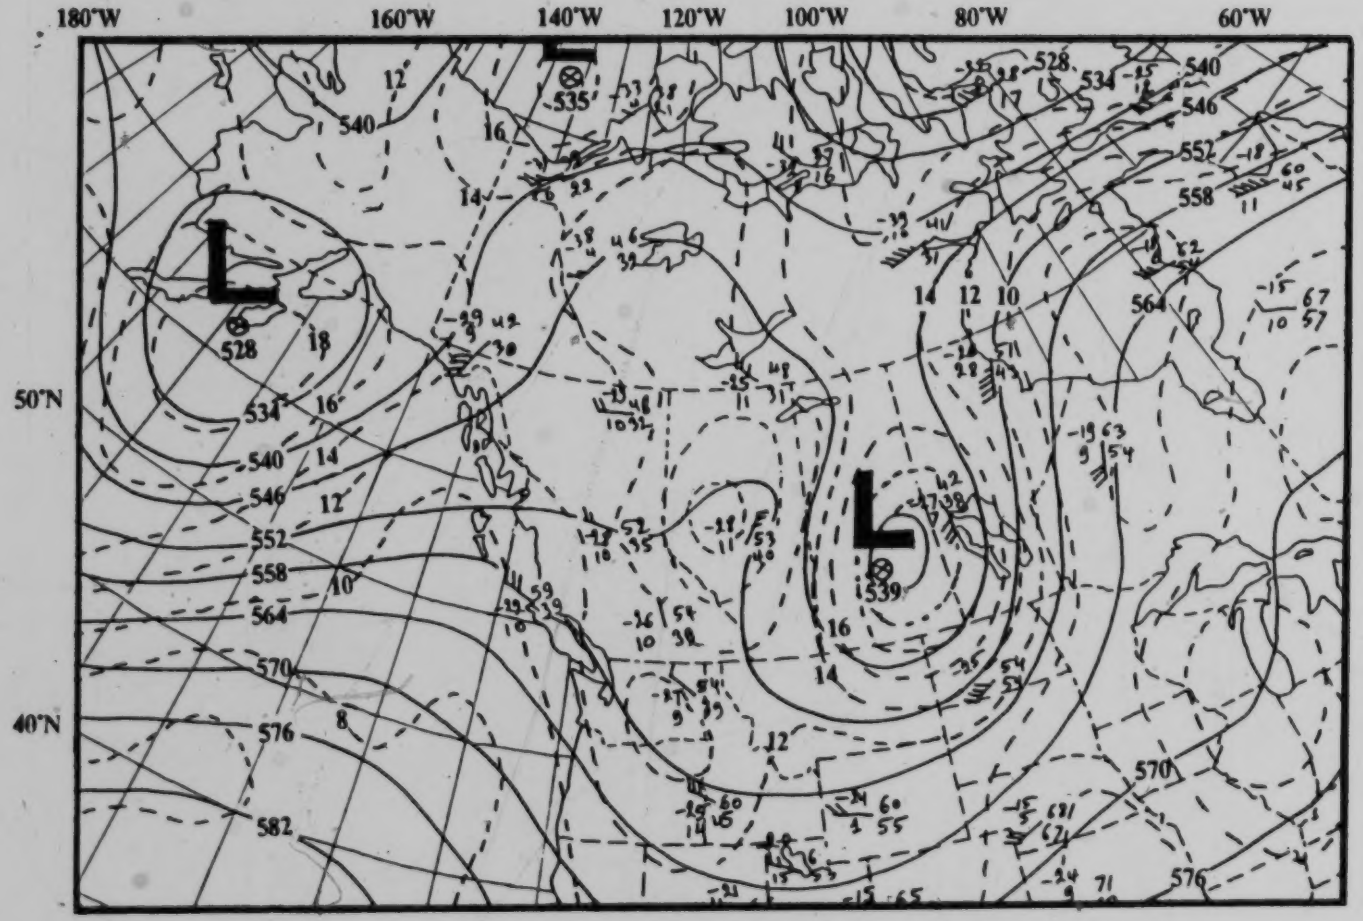

Figure 3.20 500-mb map for 0000Z May 16, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

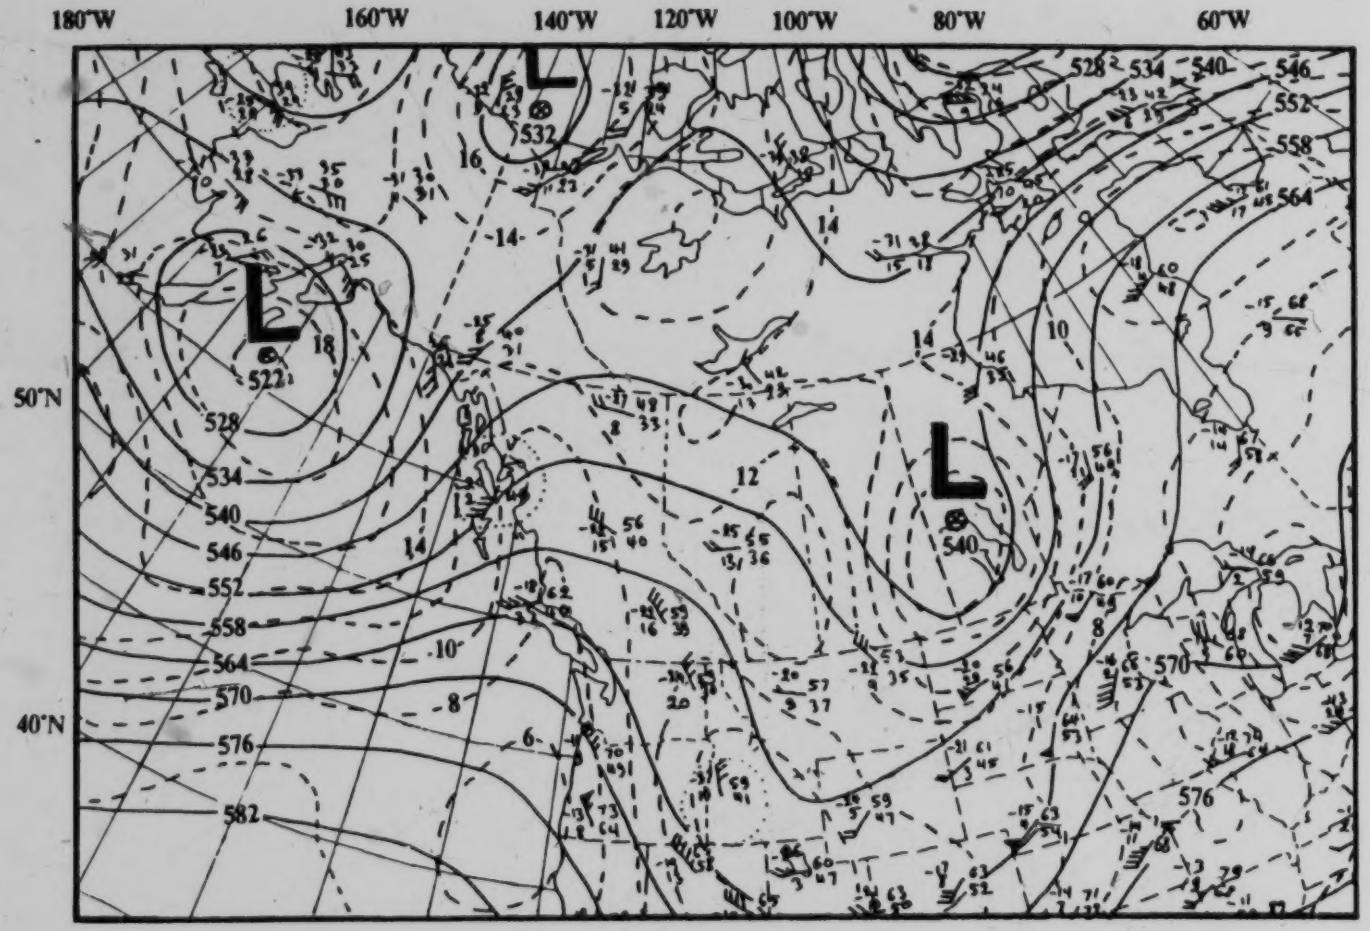

Figure 3.21 500-mb map for 1200Z May 16, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

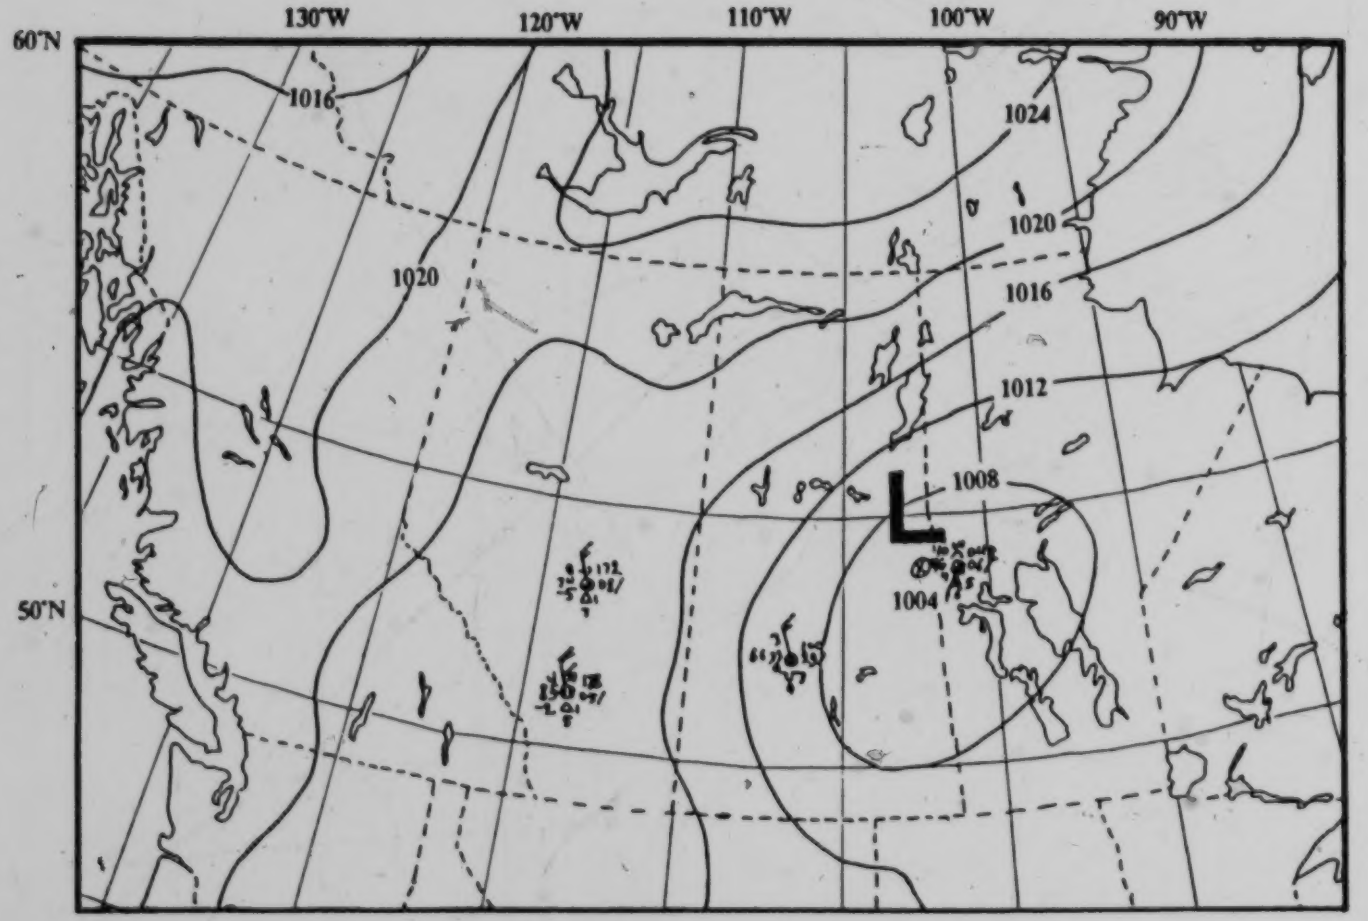

Figure 3.22 Surface Analysis map for 0000Z May 16, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

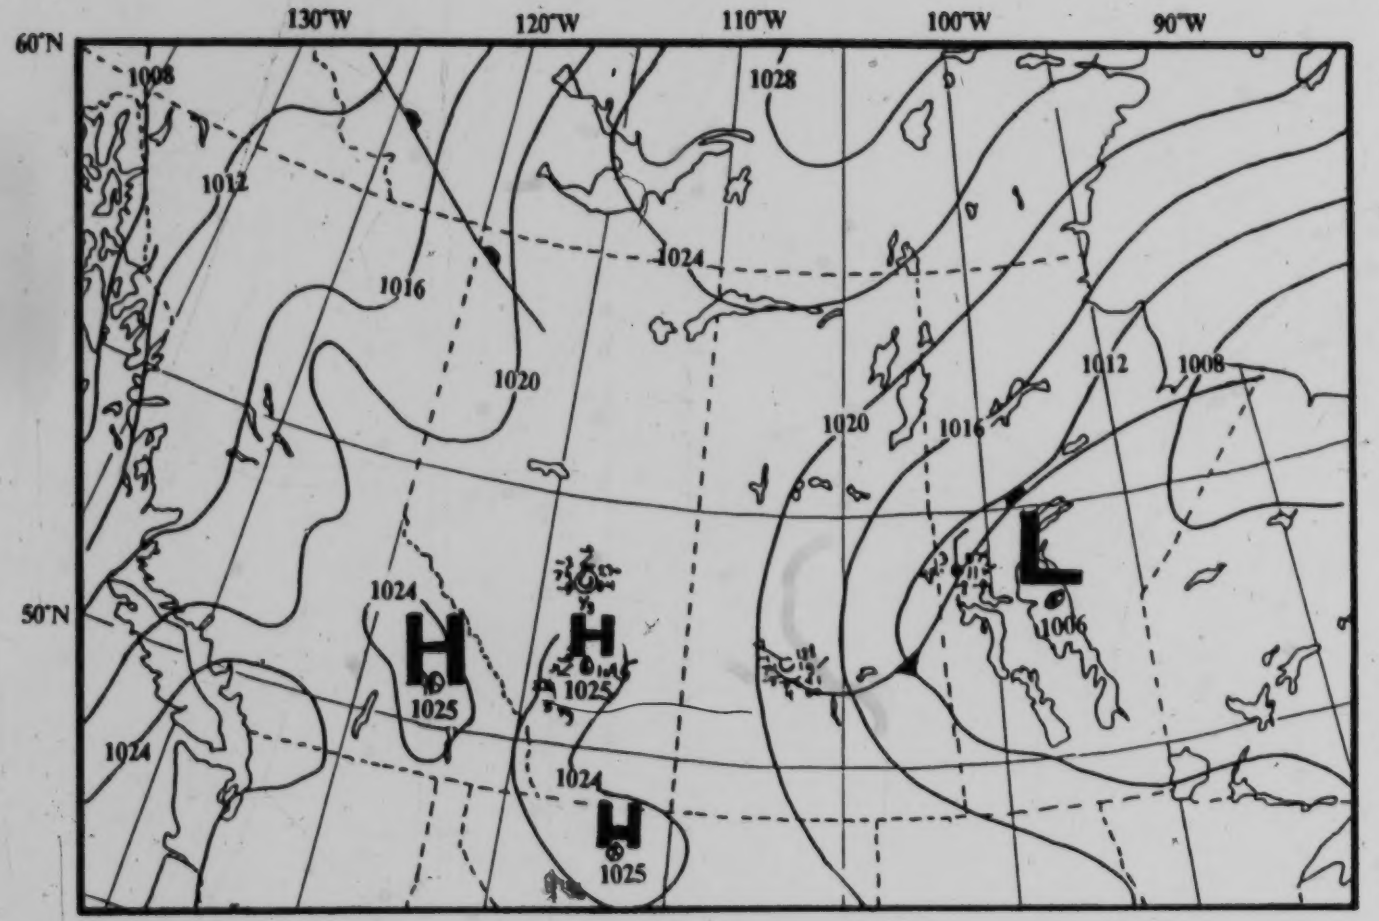

Figure 3.23 Surface Analysis map for 1200Z May 16, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

Figure 3.24 Infrared Image of May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341.

Figure 3.25 Visible Image of May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341.

3.3 Numerical Analysis and Graphical Display of Satellite Imagery

To help with the interpretation of satellite-derived digital data displays of temperature and brightness, such as Figures 3.18 and 3.19, a few guidelines and general comments will be useful, since they apply equally to similar plots in this chapter, and in the next.

The isotherms have been plotted at the relatively large intervals of 20°C, rather than, say 5°C, for two reasons. First, the structure of a thermal field is so complicated, and the gradients so tight near the edges of clouds, that any useful plot has to be of considerable size, perhaps 60x100 cm, if all the detail is to be resolved and shown to advantage. Considering the size restrictions that apply to thesis presentations, such large-scale plots would, at best, be awkward to include and integrate with the text. Making a virtue of necessity not only removes the size limitation, but justifies the 20°C interval by providing a clearer view of the essential features of the thermal structure -- the second reason -- at least on the synoptic scale, and of mesoscale features of the order of tens of kilometres. Moreover, a judicious choice of "principal" isotherms makes it also possible to display the three basic cloud types in their "natural", ascending hierarchy of elevation, namely as low, middle and high cloud.

Though not exact, but of the right order, we consider the following correspondences to hold between isotherms, cloud types and cloud-top heights:

0°C isotherm (black)	Low cloud (St, Sc, Cu), etc. Tops to ≈2500 m ASL.
-20°C isotherm (green)	Middle cloud (As, Ac, Ns). Tops to ≈5000 m ASL.
-40°C isotherm (blue)	High cloud (Ci, Cs) and TCu, Cb anvils. Tops to ≈7500 m or higher
+20°C isotherm (red)	generally clear areas of warm ground, including at times patches of scattered cloud.

The 0°C isotherm has a special significance in that it marks the freezing level, an important quantity to pilots and flight dispatchers. To be sure, the freezing level could be lower in cold air hidden beneath a cloud (or below inversions) and it could also be at ground

level in a region of melting snow.

Though less useful in meteorogical practice than isotherms, similar comments can be made about brightness isopleths, and equivalences established between brightness, cloud reflectivity, and thickness, extent of cloud and albedo. But going by brightness alone, it may be difficult to distinguish between cloud and snow-covered ground, although recourse to an IR plot will usually resolve any ambiguity.

Cloud-free areas of low albedo, such as fields and woodlands, are easily distinguished by low digital counts. Problems arise, however, with clouds because of complications such as orientation of the cloud surfaces, angle and elevation of the sun, density and size of the cloud, shadows cast by the cloud, etc.

Since no absolute measurements of brightness have been attempted, the "rule-of-thumb" equivalences suggested below should be considered only as relative but practical estimates in aid of nephanalysis.

90 DC (red) isopleth	Light, thin, cloudiness, broken or in patches and within the red isopleth, e.g. scattered to broken St, Sc and Cu. Also thin, translucent layers of As, Ci and Cs.
110 DC (black) isopleth	Encloses all opaque cloudy areas, including broken Cumulus, and possibly snow.
130 DC (green) isopleth	Solid covers of low, middle and hight cloud, guigly and in layers.
150 DC (blue) isopleth	Heavy, thick cloud, e.g. Nimbostratus, embedded or isolated convective turrets and anvils of TCu and Cb.

Areas giving digital counts less than 90 and ouside the 90 DC red isopleth are essentially clear with at most scattered, thin low cloud, such as St, Sc and Cu over open areas, fields and woodlands.

The problem of too many lines and complex detail may be overcome to some extent by the 3-dimensional "stretched net" representation of a thermal surface. Though perhaps of limited usefulness in practice, a few examples of pertinent thermal fields have been plotted

using this technique. Such 3-D displays can be useful, however, in providing not only spatial continuity, but also a direct, graphic view of the content of a large data set. They also draw attention to the distribution and location of extreme values of a property such as, in the present case, of maximum and minimum temperatures in a thermal field.

3.3.1 May 13, 1986

Figures 3.26 and 3.27 show the thermal field (isotherms) and brightness isopleths deduced from data within the square areas outlined in Figs. 3.18 and 3.19, respectively.

Both figures will be considered together, since they complement each other. Fig. 3.26 shows warm, mainly clear areas in Southern Alberta and West-central Saskatchewan, with surface temperatures in excess of 20°C. Two small, warm clear pockets are also present NE of Edmonton. The clear areas are surrounded by large patches of low cloud, and by a semi-circular arc of middle cloud, and scattered shower clouds (TCu and Cb). But the main storm clouds have gathered over the Alberta Rockies, with very cold, bright tops in excess of 7500 m. In the Jasper area (WJA), cloud-top temperatures below -55°C can be deduced from the satellite data. This suggests Cb tops which have reached or penetrated the tropopause level at a height of some 9-10 km. Though not shown in Fig. 3.26, since temperatures lower than -40°C are not plotted, this is supported by the radiosonde ascent from Stony Plain (WSE), (Fig. 3.29), about 30 miles west of the City of Edmonton, at 0000Z May 14, 1986 (near to the time of the satellite pass) which puts the tropopause at about 9 km. It also shows upper-air temperatures close to the satellite-derived temperatures (Fig. 3.26) for cloud-tops between 4.2 km and 6.3 km (about -30°C), indicating the presence of middle cloud, interspersed with convective cells (Fig. 3.18). Cloud-top temperatures north Calgary (YYC) reached minima of -35°C. Such temperatures can be found in Fig. 3.28, a 3-dimensional representation of the area 49-53°N, 107-115°W which covers a range from -35°C at cloud tops to a maximum surface temperature of 28°C north of Lethbridge (YQL). Such a maximum may seem high, but it must be remembered that the satellite measures the temperature of the radiating surface, namely ground temperature, rather than air temperature at screen level.

By 2100Z (15:00 MDT) Jasper and Banff are reporting light snow from overcast skies, and near freezing temperatures (2°C). Numerous showers have developed along the leading edge of the cloudbank to the west (Pincher Creek-Calgary-Red Deer-Edmonton) and the rainshowers turned to snow at Calgary three hours later.

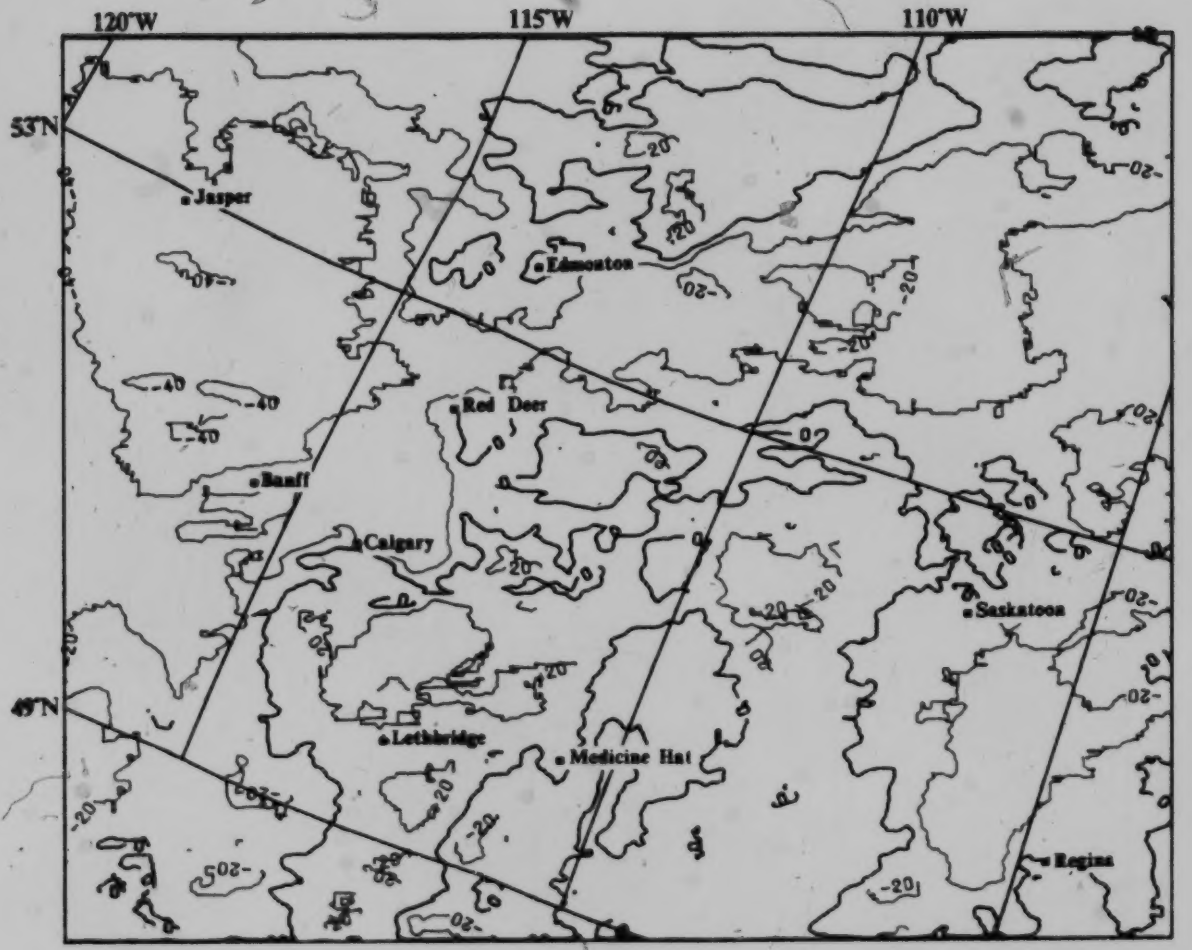

Figure 3.26 IR-derived isotherms for May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299, temperature (T) in °C, with isotherm interval 20°C.

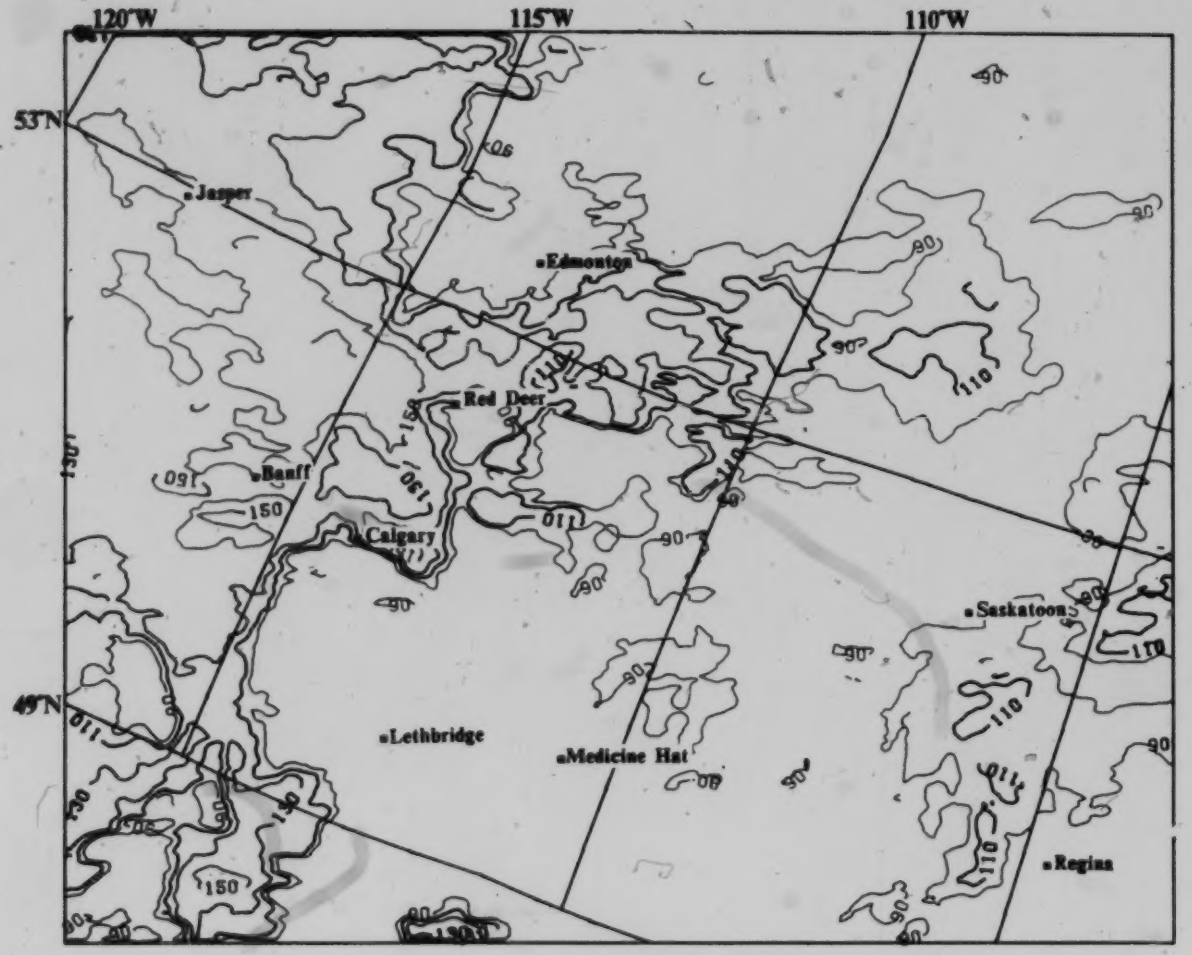

Figure 3.27 Brightness isopleths for May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299, isopleth interval 20 counts.

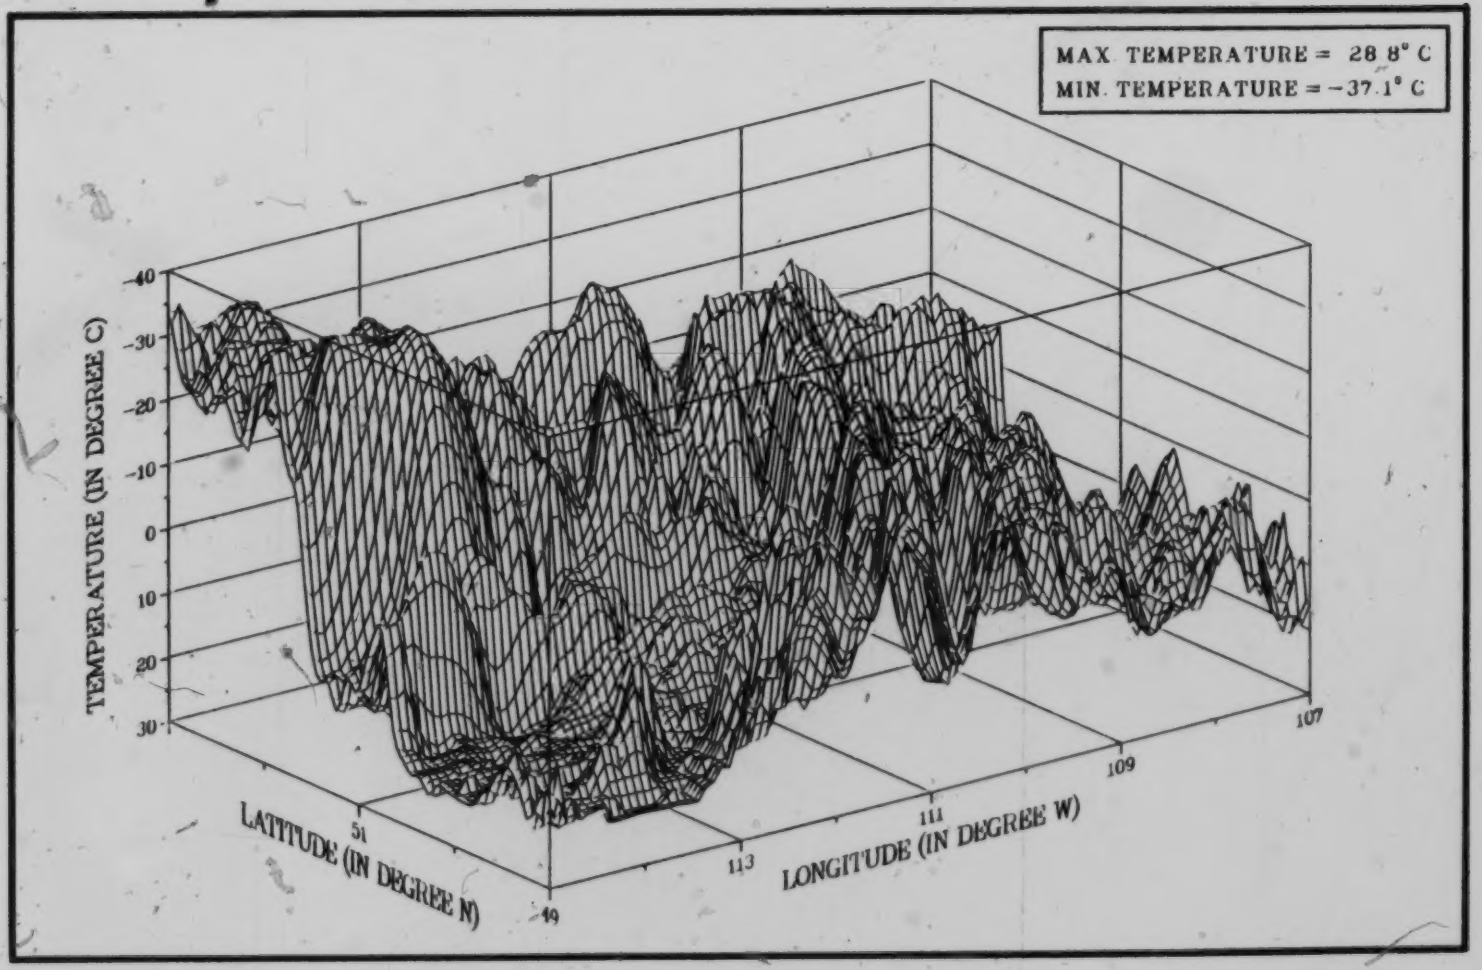

Figure 3.28 IR-derived 3 Dimensional temperature field of the cold-low area (49-53°N, 107-115°W) for May 13, 1986 at 2047-2102Z, NOAA-9 orbit 7299.

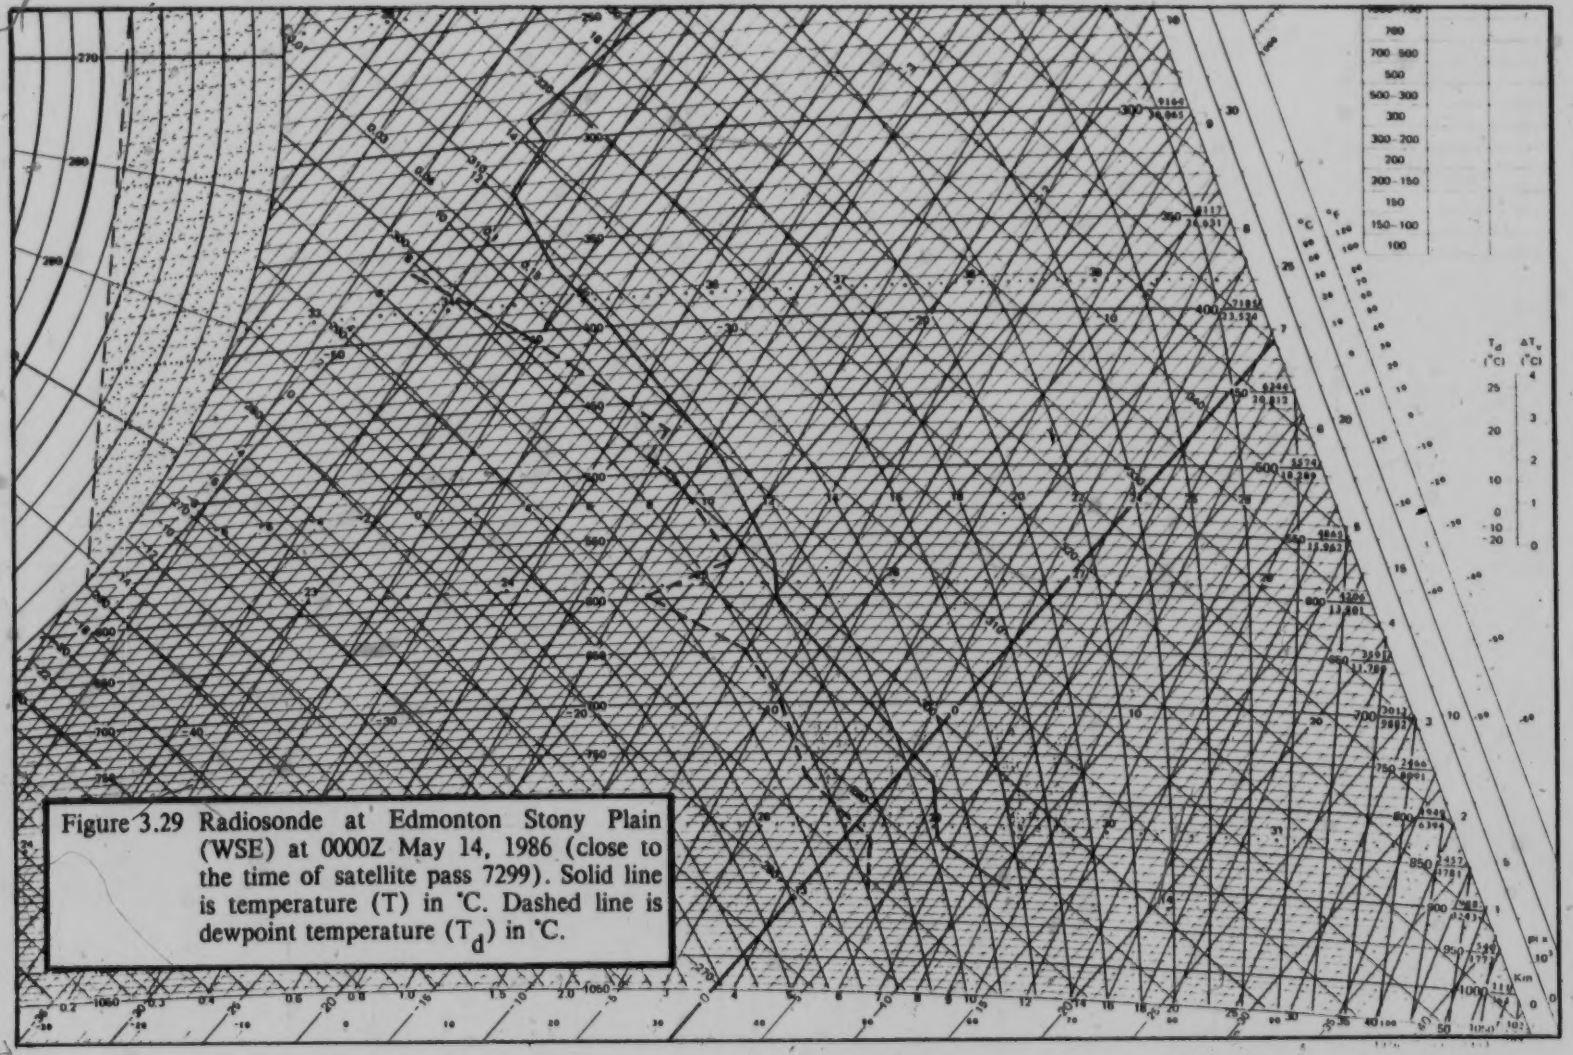

Figure 3.29 Radiosonde at Edmonton Stony Plain (WSE) at 0000Z May 14, 1986 (close to the time of satellite pass 7299). Solid line is temperature (T) in °C. Dashed line is dewpoint temperature (T_d) in °C.

3.3.2 May 14, 1986

Figures 3.30 and 3.31 show the isotherms and brightness isopleths for 2036Z (NOAA-9 orbit 7313). Both figures show the bright, cold and well-developed comma cloud curving from Lethbridge through the western Calgary and Red Deer regions and then southeastward to Saskatchewan and Regina with the vortex centre located at 51°N, 110°W. Cumulonimbus cells are embedded along the rear edge of the comma cloud. The "dry slot" marked by surface temperatures from 10°C to 15°C contains stil several bands of Cu and TCu with scattered showers. The coldest and highest clou-tops with temperatures lower than -40°C are found in Central and Western Alberta and in northern Saskatoon, NE of Regina, and over Lake Winnipeg. Most of the heavier and continous precipitation is reported in the Edmonton-Red Deer-Lethbridge region, with snow in Calgary being blown about by gusty 38-knot northwesterly winds.

The radiosonde released at 0000Z on May 15 from Stony Plain (Fig. 3.33) supports the temperature and cloud structure in the Edmonton District. (No regularly scheduled ascents are available from Calgary). In the 750 to 600-mb layer the temperature-dewpoint depression is zero, indicating complete saturation and solid cloud to at least 4.5 km with convective tops likely to 8 km. The 3-D isotherm plot of Fig. 3.32 indicates minimum cloud-top temperatures of -56.9°C at 56°N, 115°W, and a maximum at 18.7°C in northern Montana.

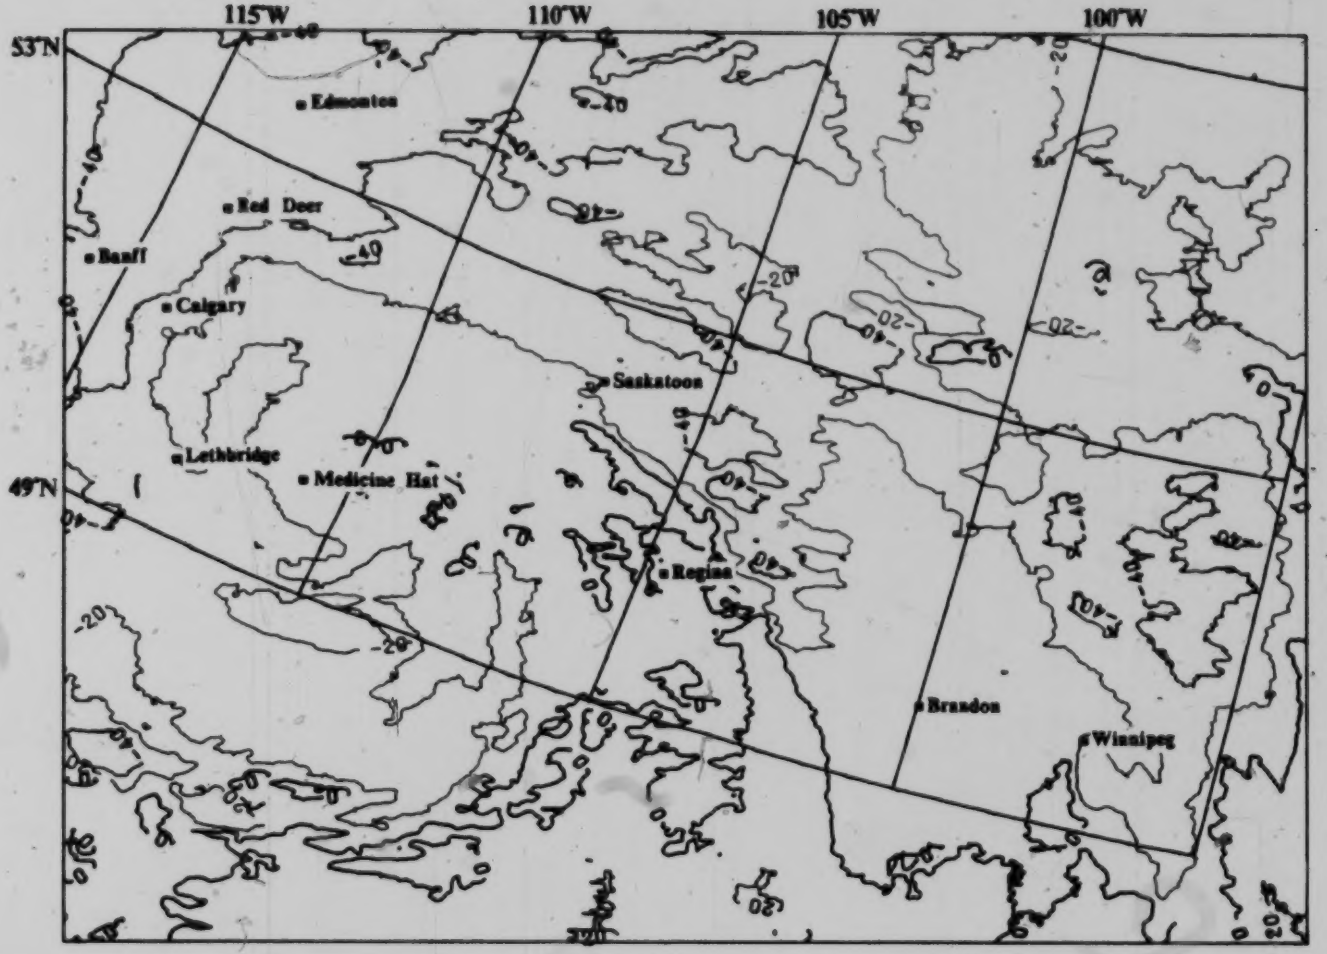

Figure 3.30 IR-derived isotherms for May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313, temperature (T) in °C, with isotherm interval 20°C.

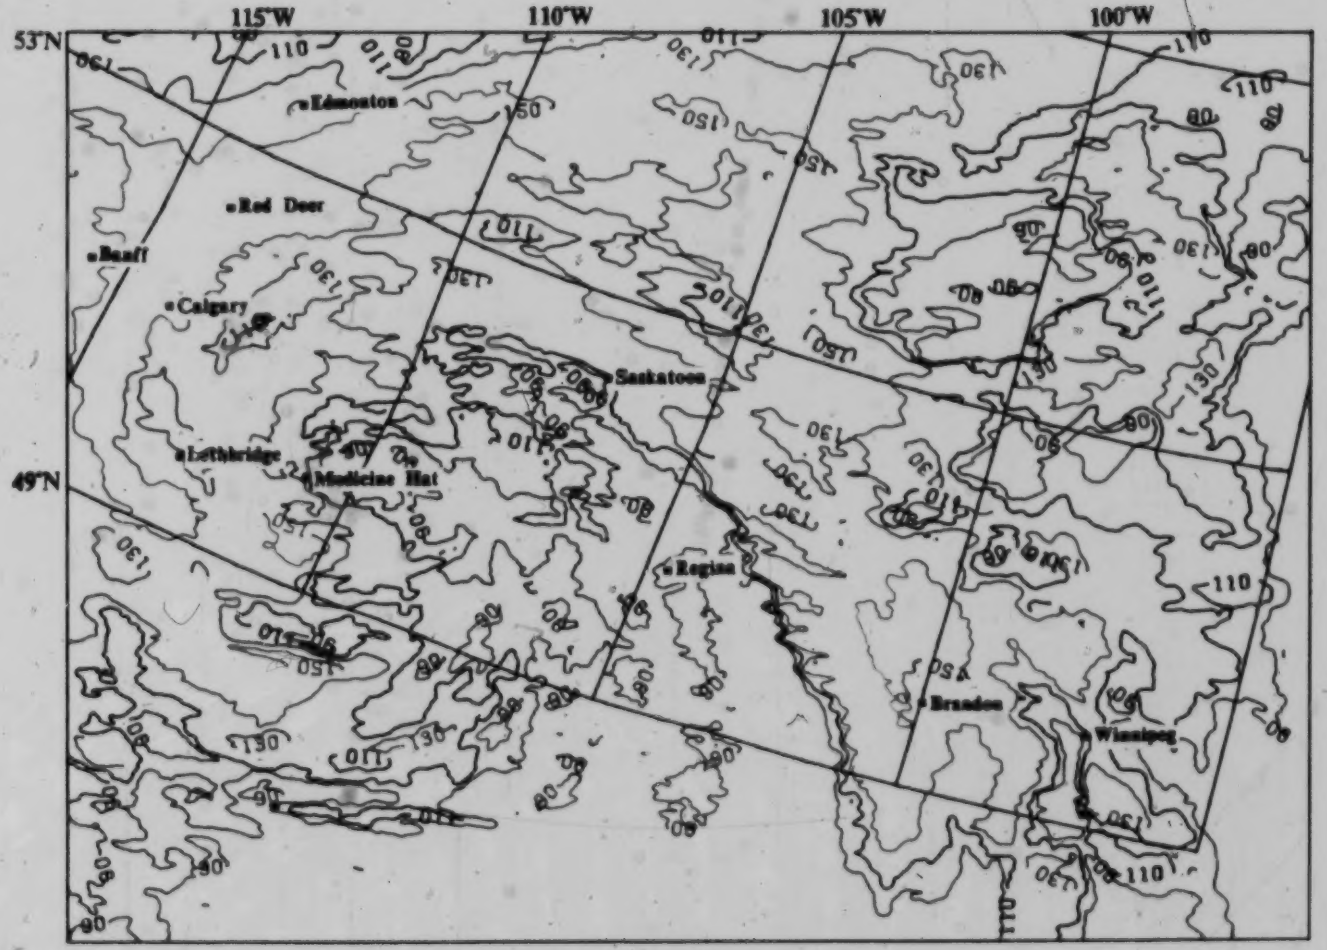

Figure 3.31 Brightness isopleths for May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313, isopleth interval 20 counts.

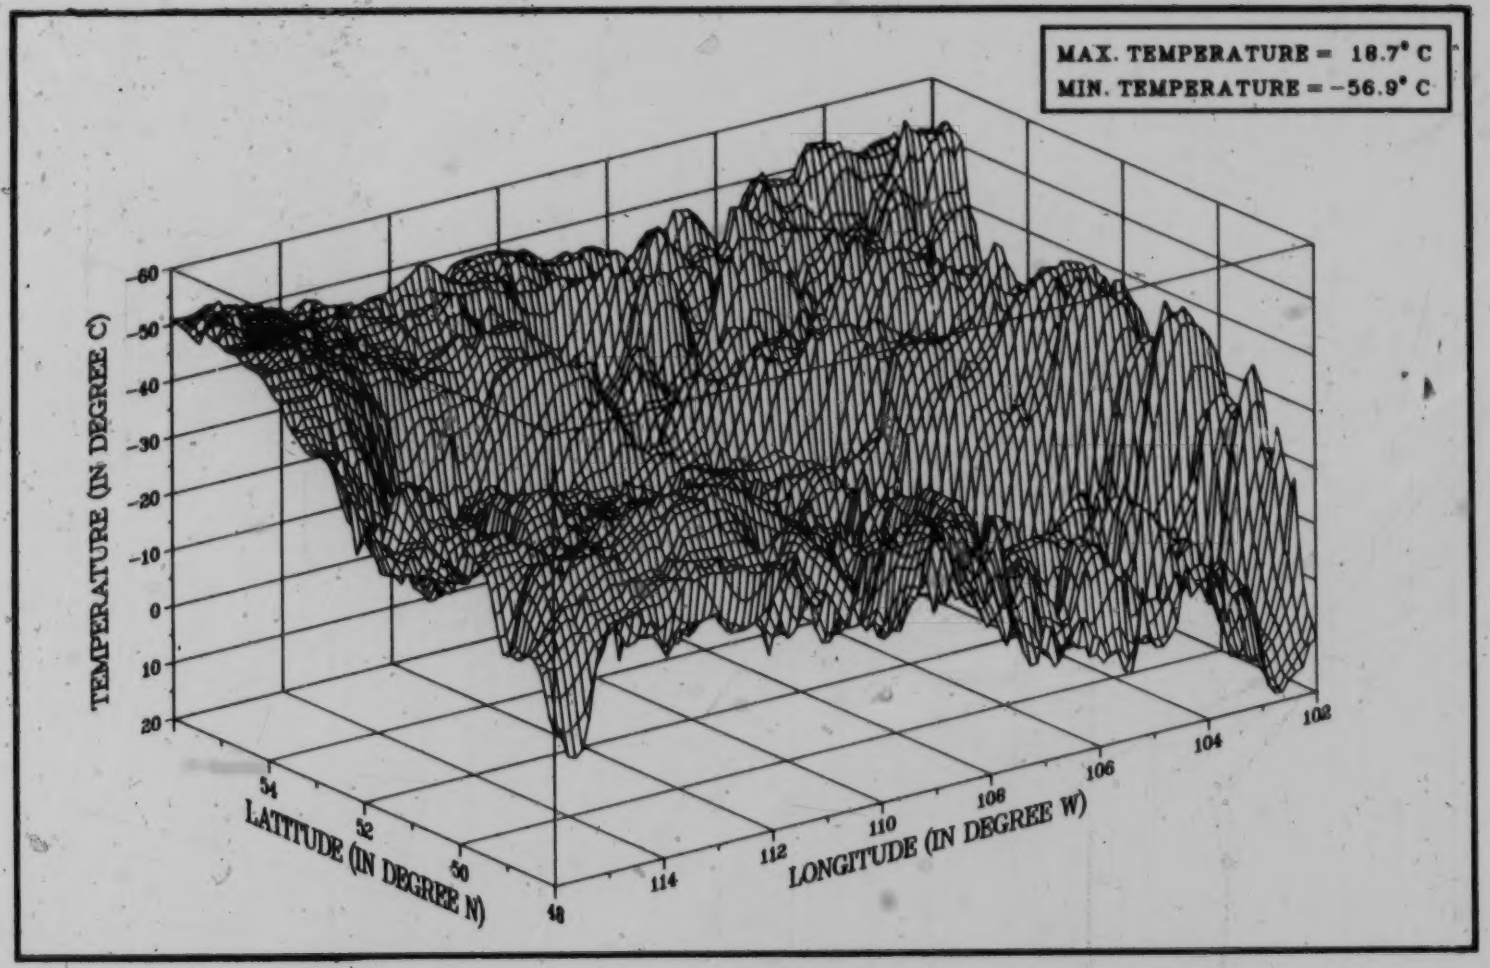

Figure 3.32 IR-derived 3 Dimensional temperature field of the cold-low area (48-56°N, 102-116°W) for May 14, 1986 at 2036-2051Z, NOAA-9 orbit 7313.

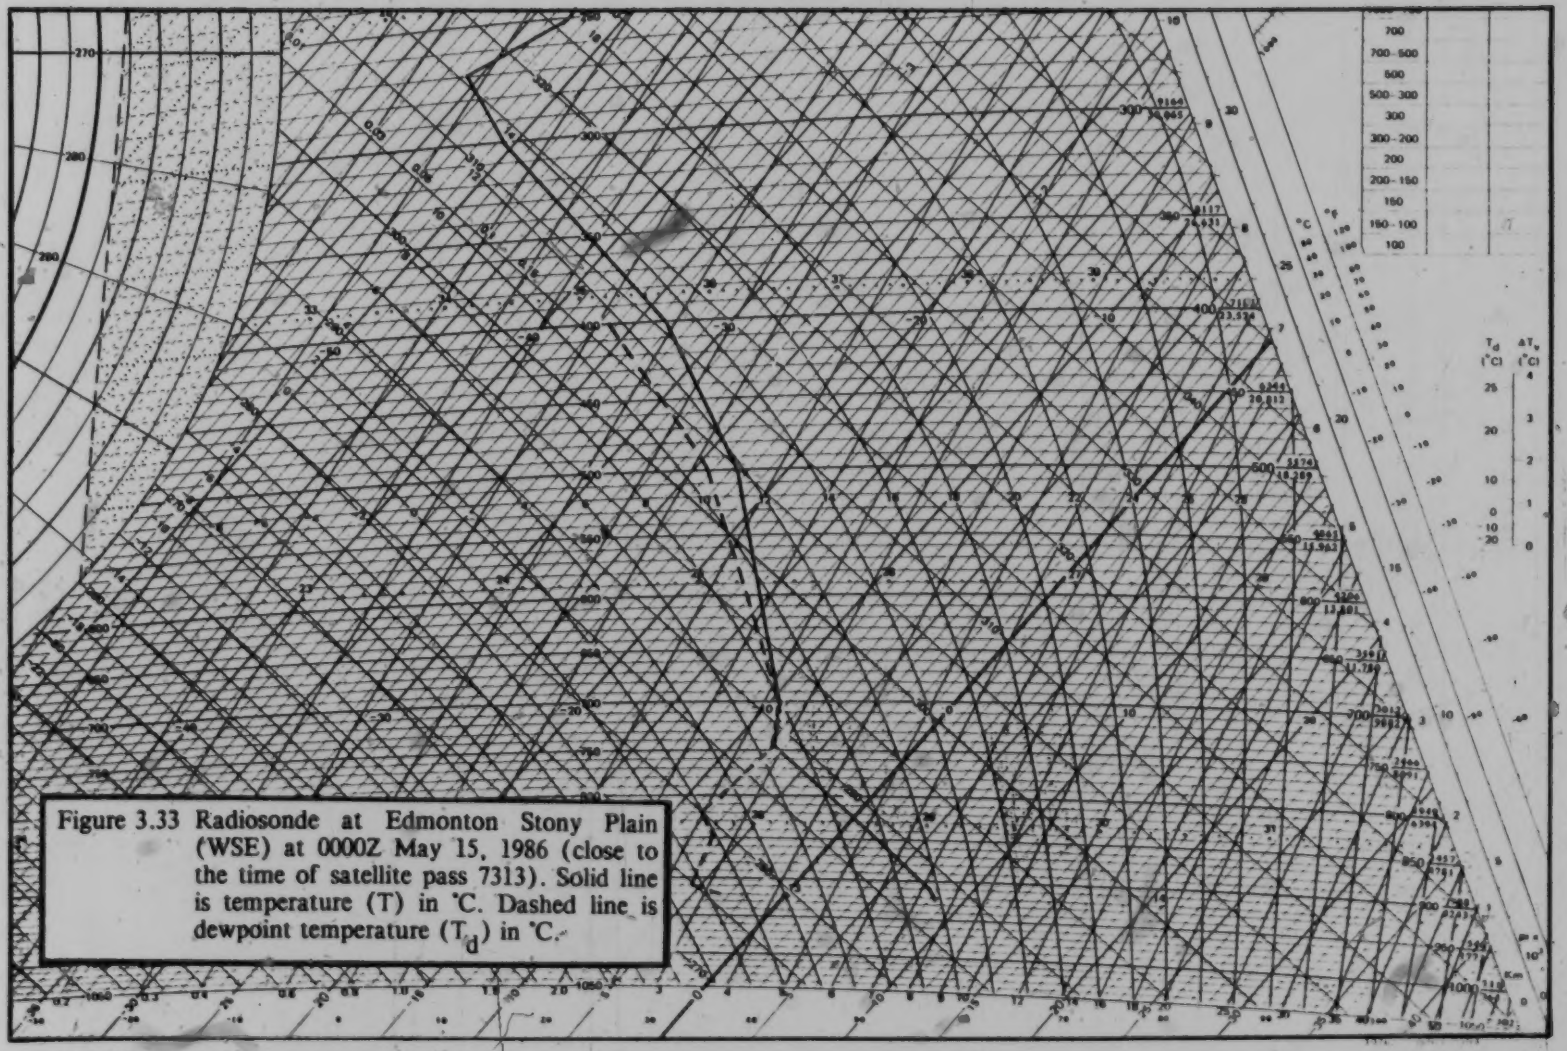

Figure 3.33 Radiosonde at Edmonton Stony Plain (WSE) at 0000Z May 15, 1986 (close to the time of satellite pass 7313). Solid line is temperature (T) in °C. Dashed line is dewpoint temperature (T_d) in °C.

3.3.3 May 15, 1986

Figures 3.34 and 3.35 show the isotherm pattern and and brightness isopleths on mid-afternoon, 15 May 1986, for the square areas outlined in the satellite images of Figs. 3.22 and 3.23, respctively. Comparing the snow opened-up cloud spiral with the tightly-wound spiral of the previous day, it is obvious that the system has passed maturity and is approaching the end of its life cycle.

The western loop through Alberta and northern Montana still contains the brightest coldest and most active clouds. The snow has ended in western Alberta, but continues in eastern areas from Lloydminster to Coronation and Medicine Hat. Snow is also falling in western Saskatchewan, between North Battleford and Swift Current, with rain further east in a band from Saskatoon to Regina.

The eastern branch of the spiral is breaking up rapidly over western Ontario. The "dry slot" over Manitoba has widened and become filled with scattered low and middle cloud (Cu, Ac, Acc). Afternoon temperatures in this warm sector are in the 15-20°C range, but only 0-8°C in the cold air to the west.

The 3-D representation of Fig. 3.36 of the smaller block within 46-54°N, 100-114°W shows the coldest cloud tops at -47.1°C, and a surface temperature maximum of 18.7°C.



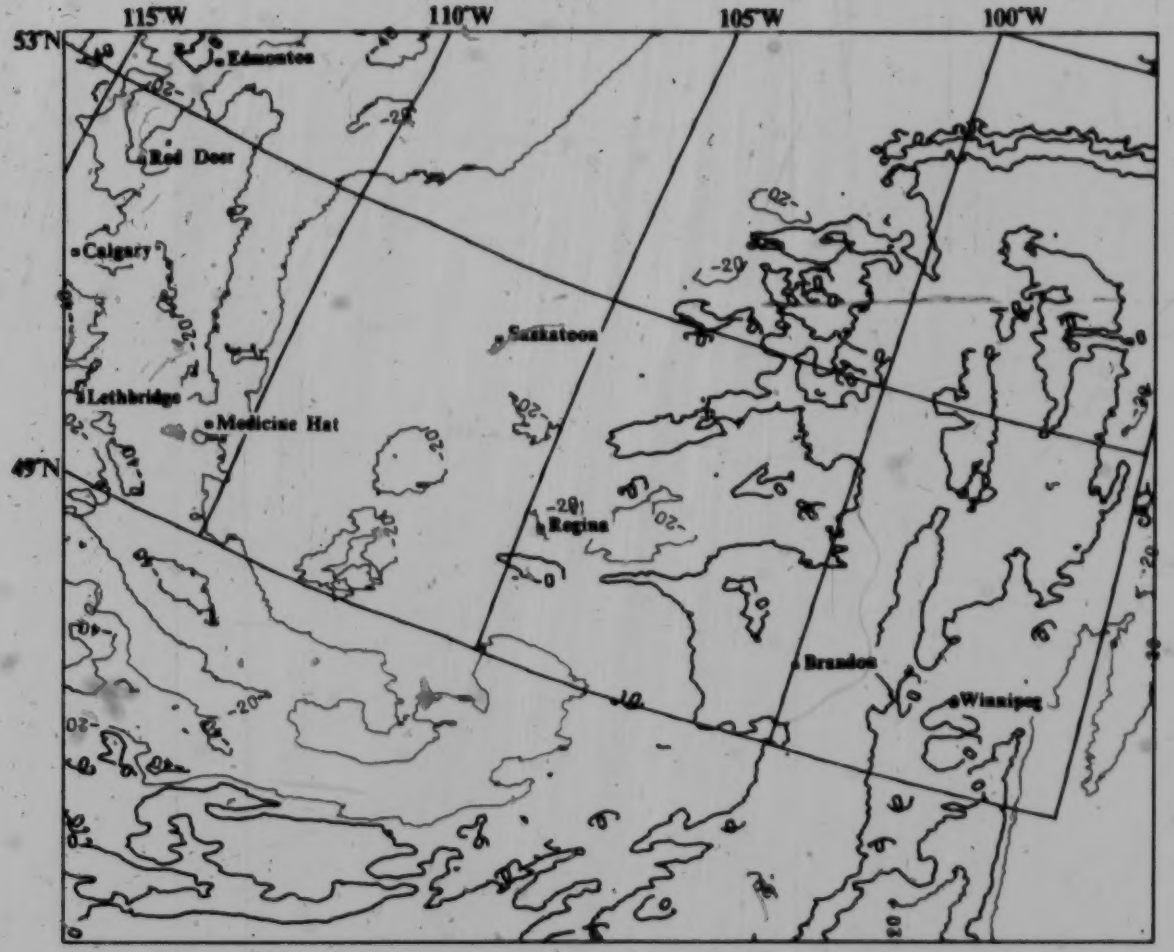

Figure 3.34 IR-derived isotherms for May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327, temperature (T) in °C, with isotherm interval 20°C.

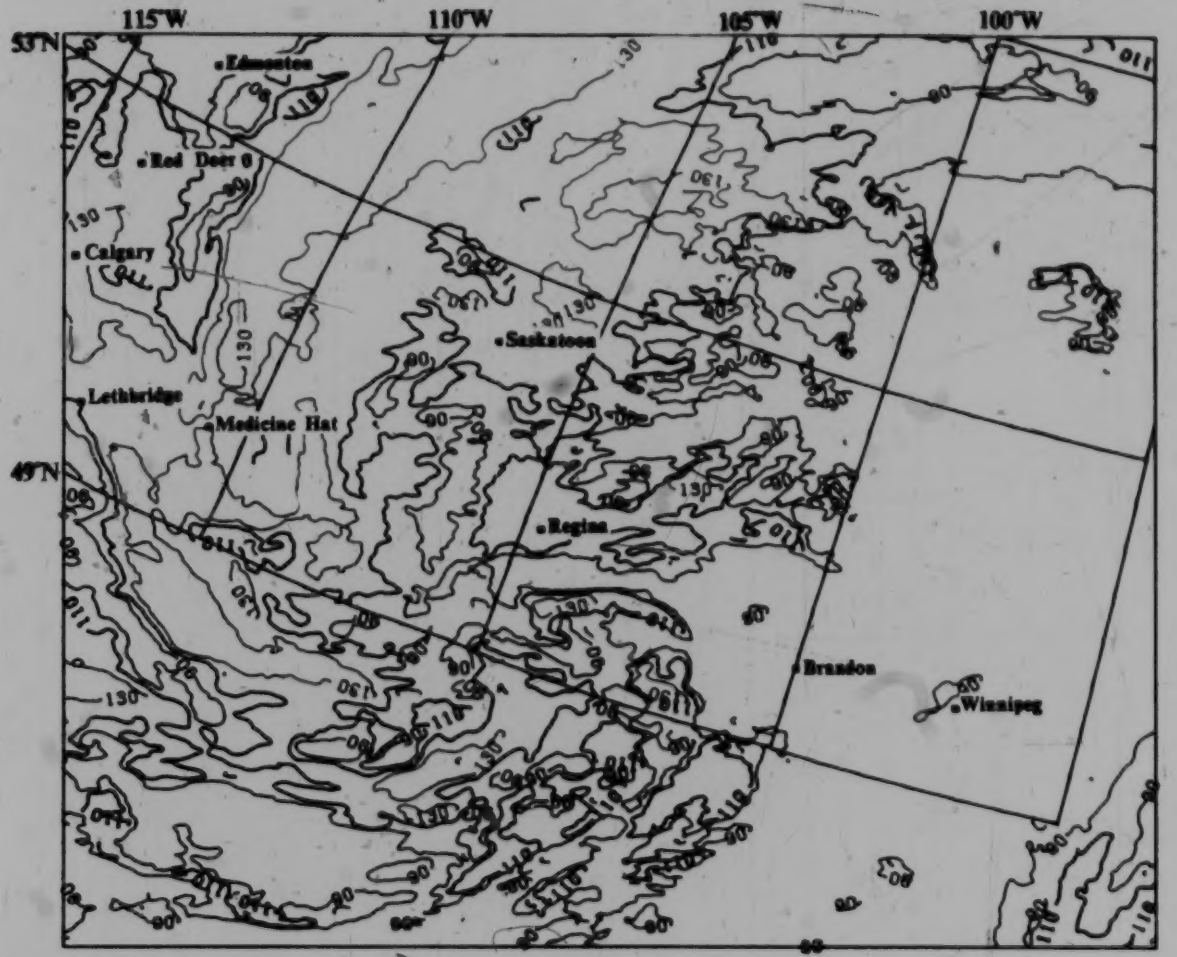

Figure 3.35 Brightness isopleths for May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327, isopleth interval 20 counts.

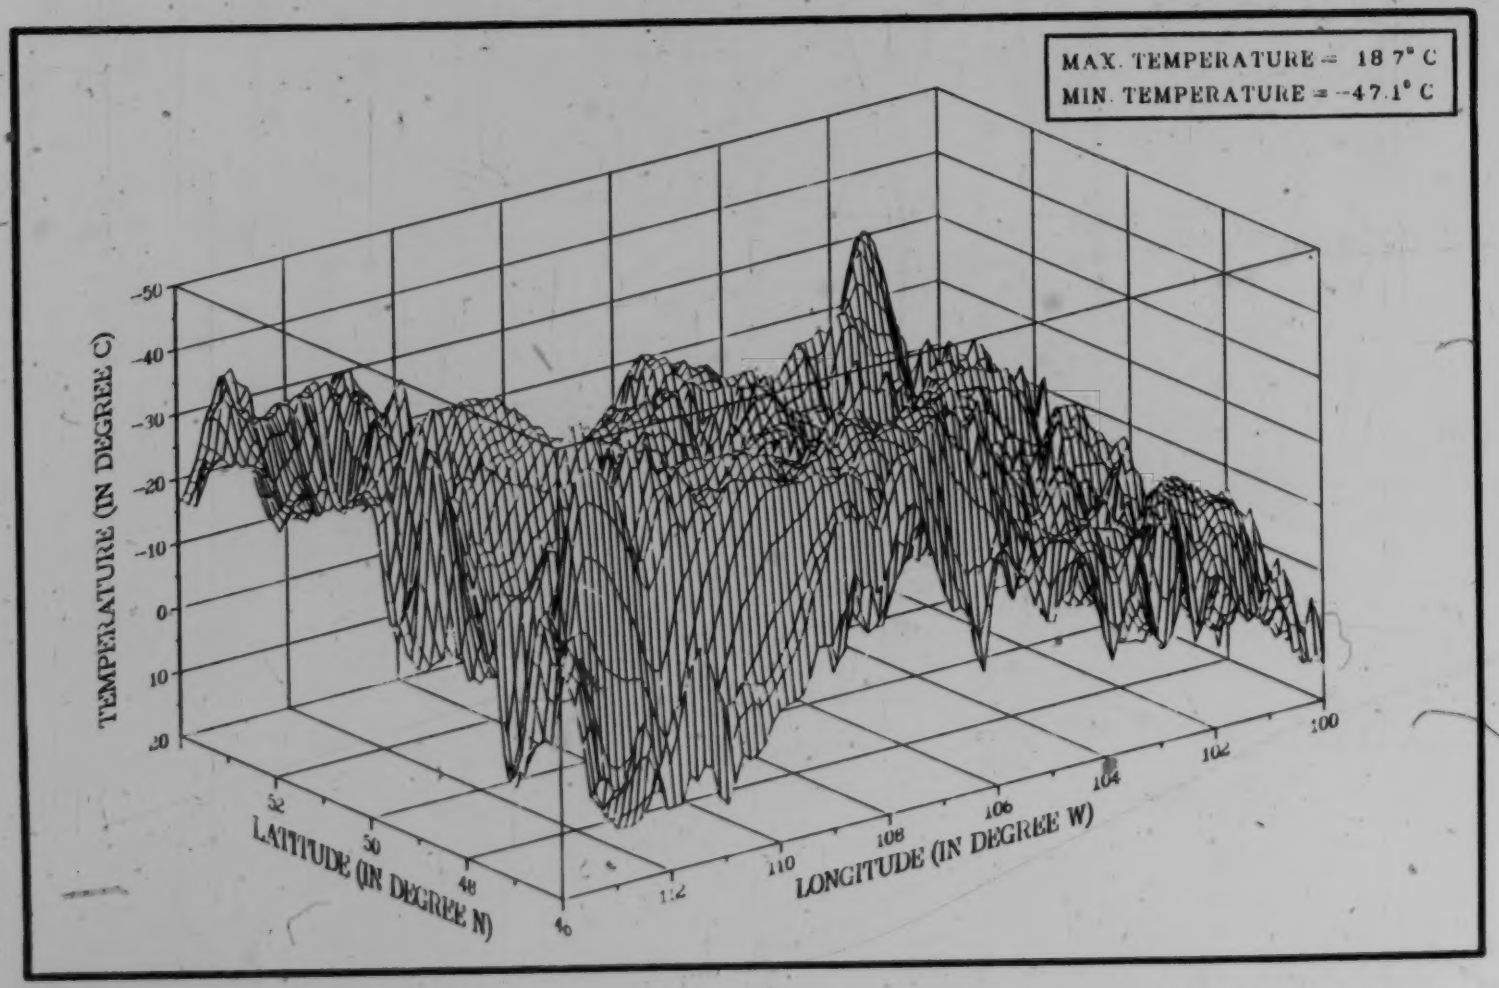

Figure 3.36 IR-derived 3 Dimensional temperature field of the cold-low area (46-54°N, 100-114°W) for May 15, 1986 at 2025-2040Z, NOAA-9 orbit 7327.

3.3.4 May 16, 1986

The dissipating remains of the vortex, now located over southern Manitoba, consists mainly of cumuliform low cloud (Sc, Cu). Figures 3.37 and 3.38, the thermal and brightness representations of the area enclosed within the squares on the satellite images Figures 3.24 and 3.25, respectively, show that this cloud is still organized into several bands, interspersed with numerous clear breaks; this is seen best in the brightness analysis of Fig. 3.25.

The heavy masses of cloud are reduced to one large complex giving snow to NE Manitoba. A smaller patch of middle cloud (Ac, Acc) is present in southern Saskatchewan. The 3-D representation of the area 48-56°N, 91-101°W shows the highest and coldest (-47.1°C) cloud confined to the southwest, with surface temperatures near 20°C in the cloud-free areas.

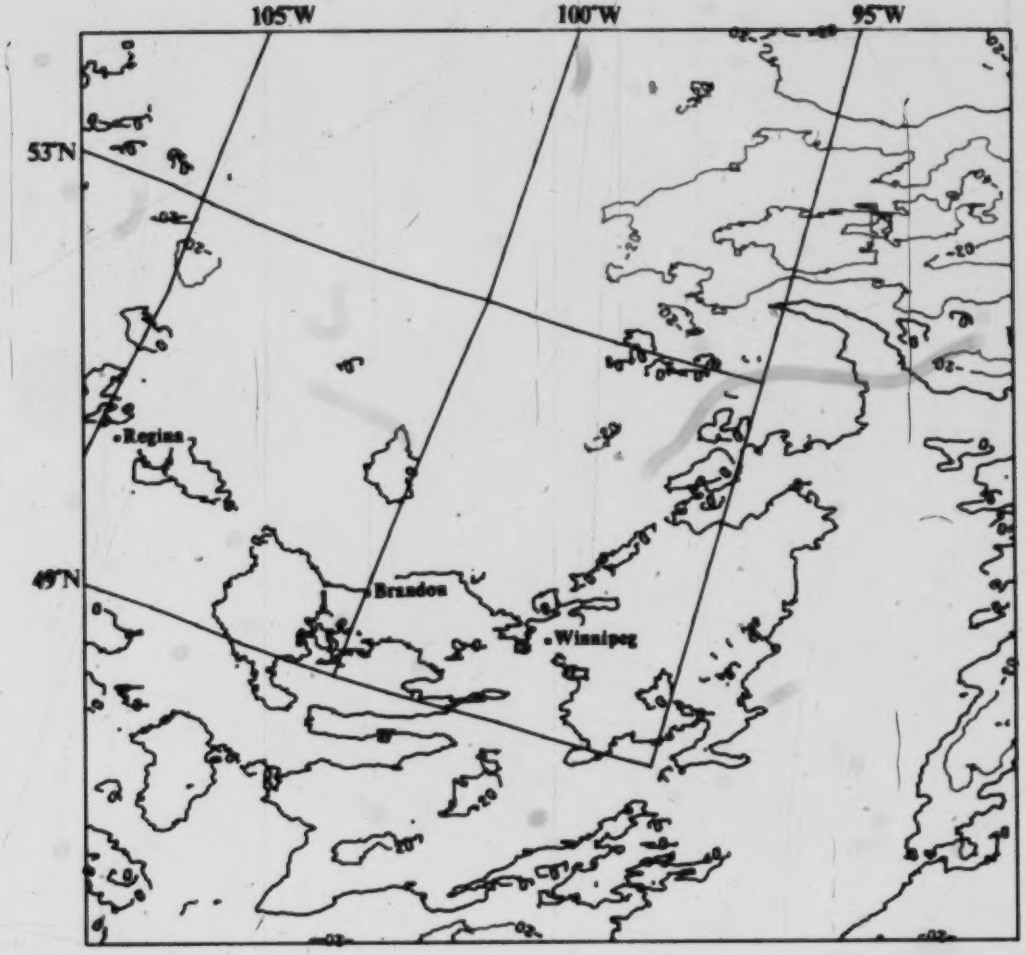

Figure 3.37 IR-derived isotherms for May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341, temperature (T) in °C, with isotherm interval 20°C.

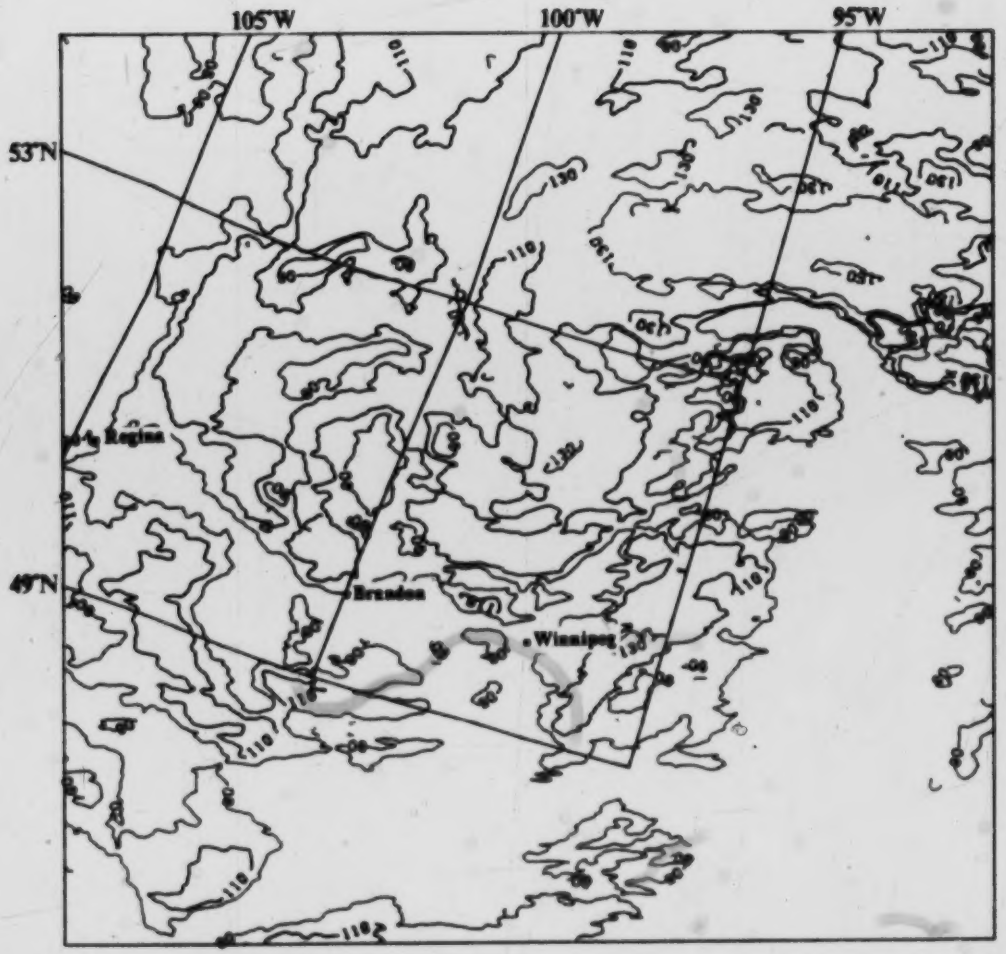

Figure 3.38 Brightness isopleths for May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341, isopleth interval 20 counts.

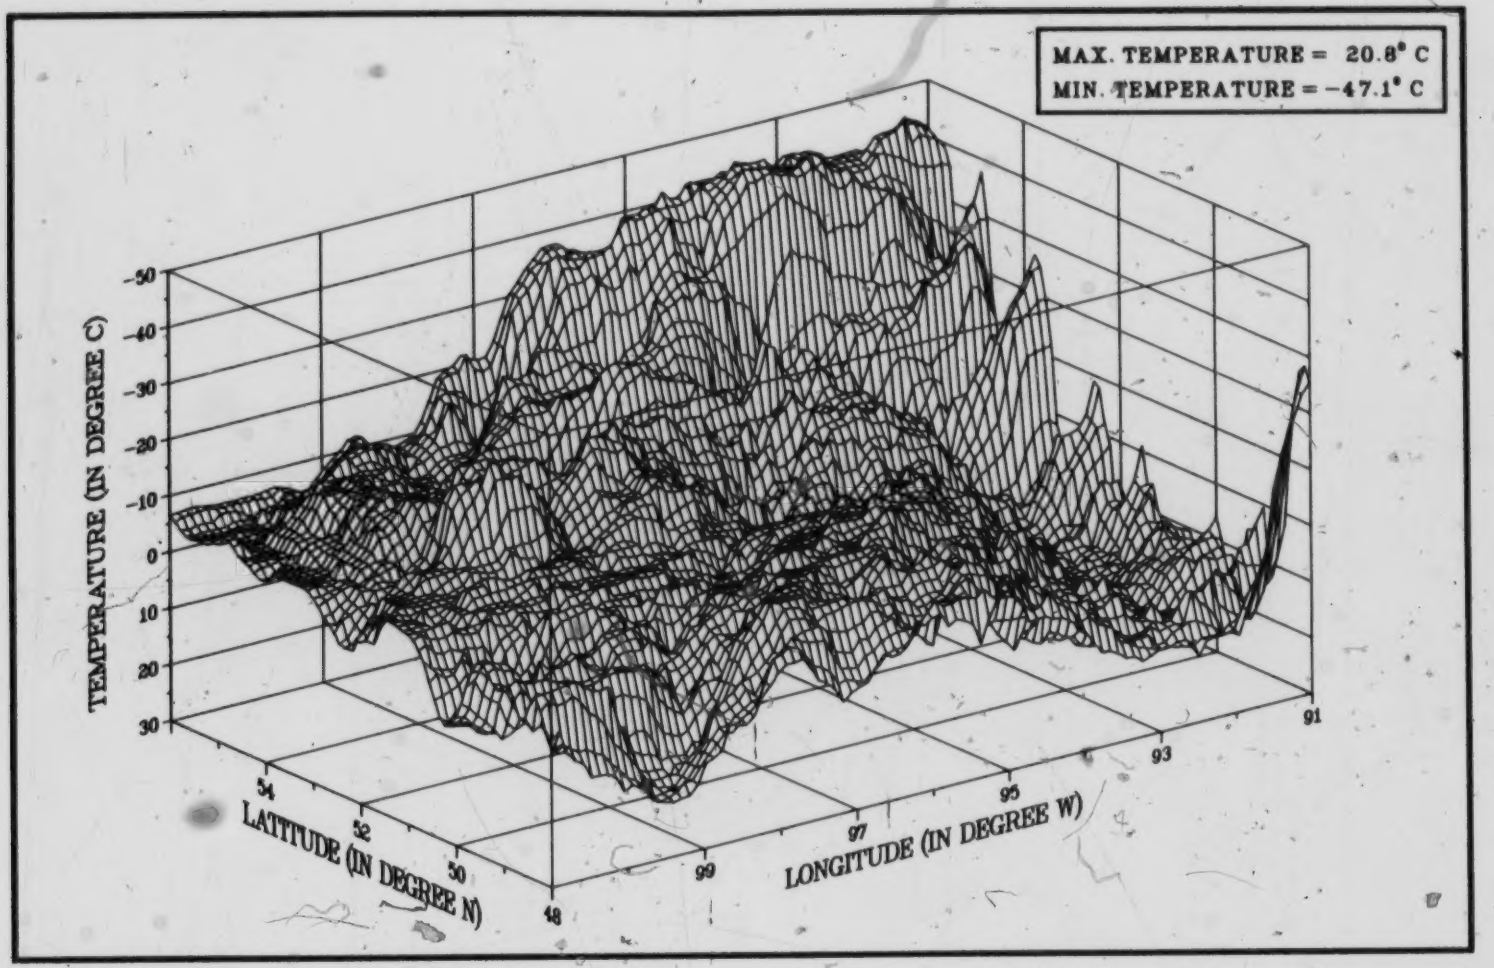

Figure 3.39 IR-derived 3 Dimensional temperature field of the cold-low area (48-56°N, 91-101°W) for May 16, 1986 at 2015-2030Z, NOAA-9 orbit 7341.

4. CASE STUDY #2 : HEAVY RAIN STORM OF JULY, 1986

4.1 Introduction

This case study examines the conditions leading to the intensification of the cold low that produced heavy rainfall in Central Alberta in July, 1986. Cloud patterns on satellite images, synoptic maps and radar scans are compared and correlated, and physical processes described that resulted in exceptionally heavy precipitation over the North Saskatchewan River Basin.

4.2 Synoptic Description

4.2.1 July 16, 1986

Figure 4.1 (July 16, 1986 0000Z) shows the cold low at a central depth of 559 dam, located near Port Angeles (Washington, USA), with a long trough sloping northeastward to Edmonton and Ft. Churchill. The corresponding surface map (0000Z, late afternoon, not reproduced here but similar to Fig. 4.3) shows that numerous Cb, TCu and showers have developed over the interior of B.C. and in western Alberta. During the next 12 hours the cold low has moved to Central Washington at about 8 knots and deepened to 556 dam (Fig. 4.2). The vorticity centre moved at about 13 knots.

The July 16, 1200Z surface map (Fig. 4.3) shows a meandering S-shaped isobar pattern B.C.-Alberta-Saskatchewan, and two large but inactive low-pressure cells over the western U.S. Though still early morning, showery conditions prevail in the Cold Lake-Edmonton-Jasper regions, indicating that the showers were due to causes other than simple day-time heating. This was borne out by events later in the day, when the precipitation area spread north as far as Peace River and Ft. McMurray, and south to Calgary and Coronation.

The afternoon satellite images, Figures 4.4 and 4.5, reveal a very complicated and diverse cloud structure.

At D1, the clouds are equally bright on both infrared and visible images, indicative of cold, high cloud, which is composed largely of the anvil tops of Cb embedded in a large expanse of Cs. Note the "scalloped" western edge of this cloud mass (on the IR image), clearly outlining individual convective cells, which are drifting northeastward in the southerly flow aloft (see Fig. 4.6)

Layers of Ac, As, Sc are present below the high cloud D1 (as reported by weather stations) which appear as a moderate shade of grey in the IR (Fig. 4.4) where not covered by an upper deck, such as at B1-B2-B3, D2 and F. The light grey cellular pattern over the much darker shades at H (northern Saskatchewan) indicates patches of Ac above a large expanse of much lower cumuliform (Sc, Cu) cloud.

The cloud edge C1-C2-C3 marks the incipient head of the comma cloud of the developing storm, while the band of Cirrus A1-A2-B3 is associated with wide-spread convective activity (Cb, Cu, showers and thunderstorms) in southeastern B.C. and the Peace River country. There are many small breaks between the larger cloud complexes, best seen on the visible image as dark areas, because of their low albedo.

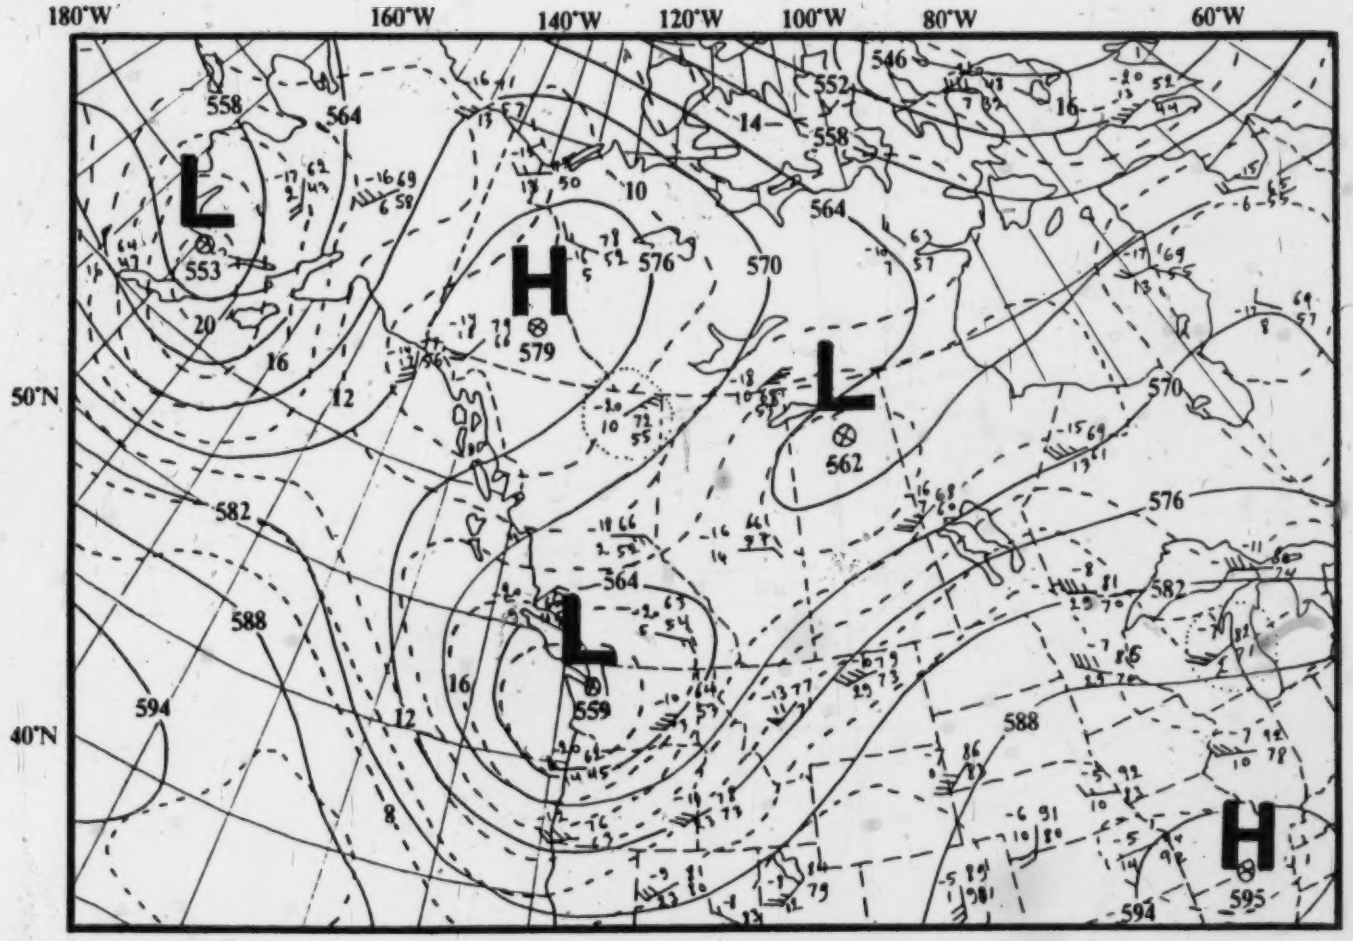

Figure 4.1 500-mb map for 0000Z July 16, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

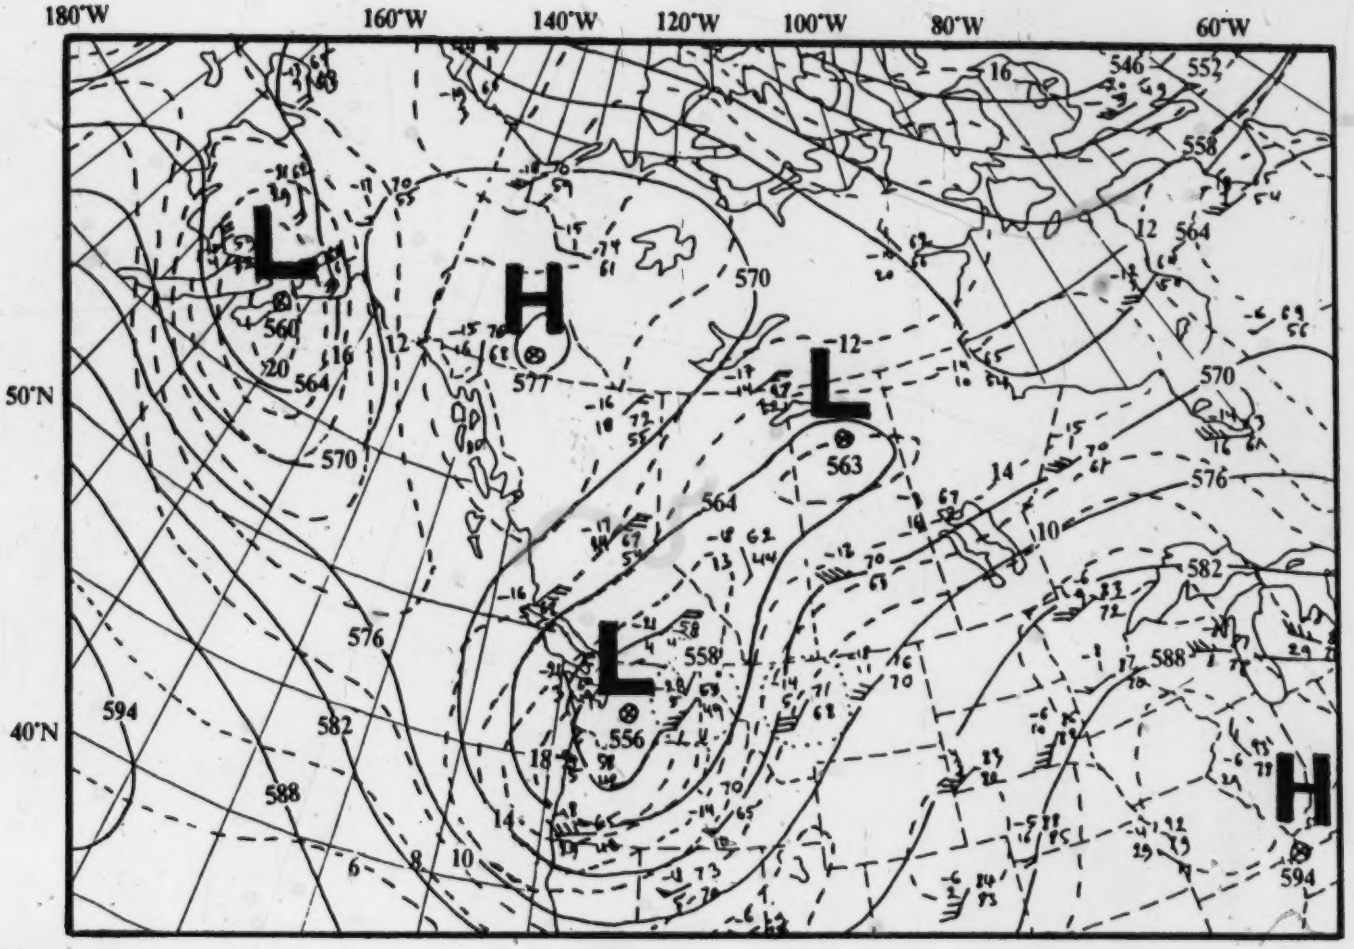

Figure 4.2 500-mb map for 1200Z July 16, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

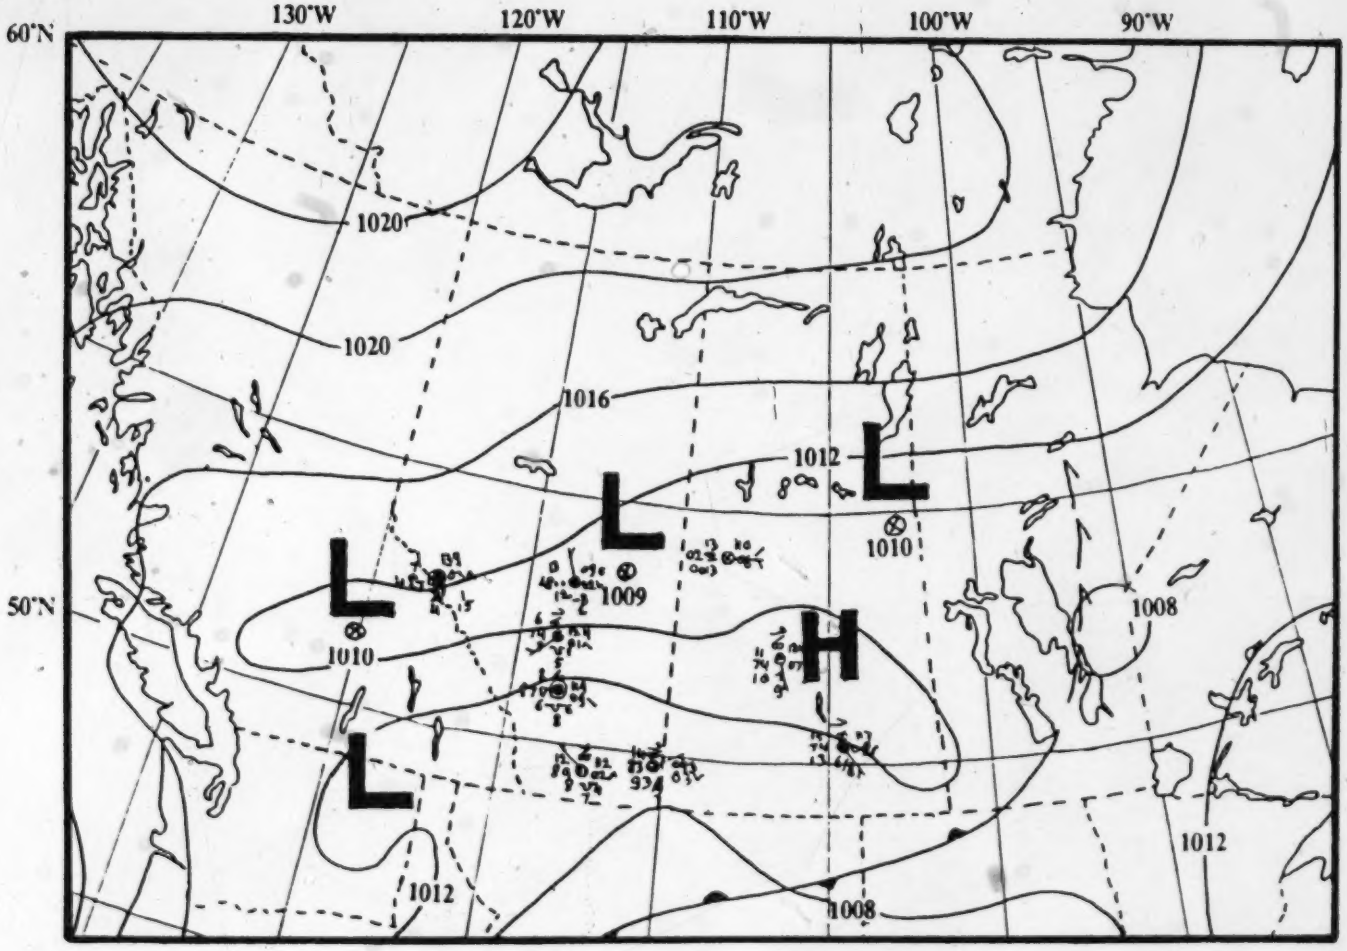

Figure 4.3 Surface Analysis map for 1200Z July 16, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

Figure 4.4 Infrared Image of July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202.

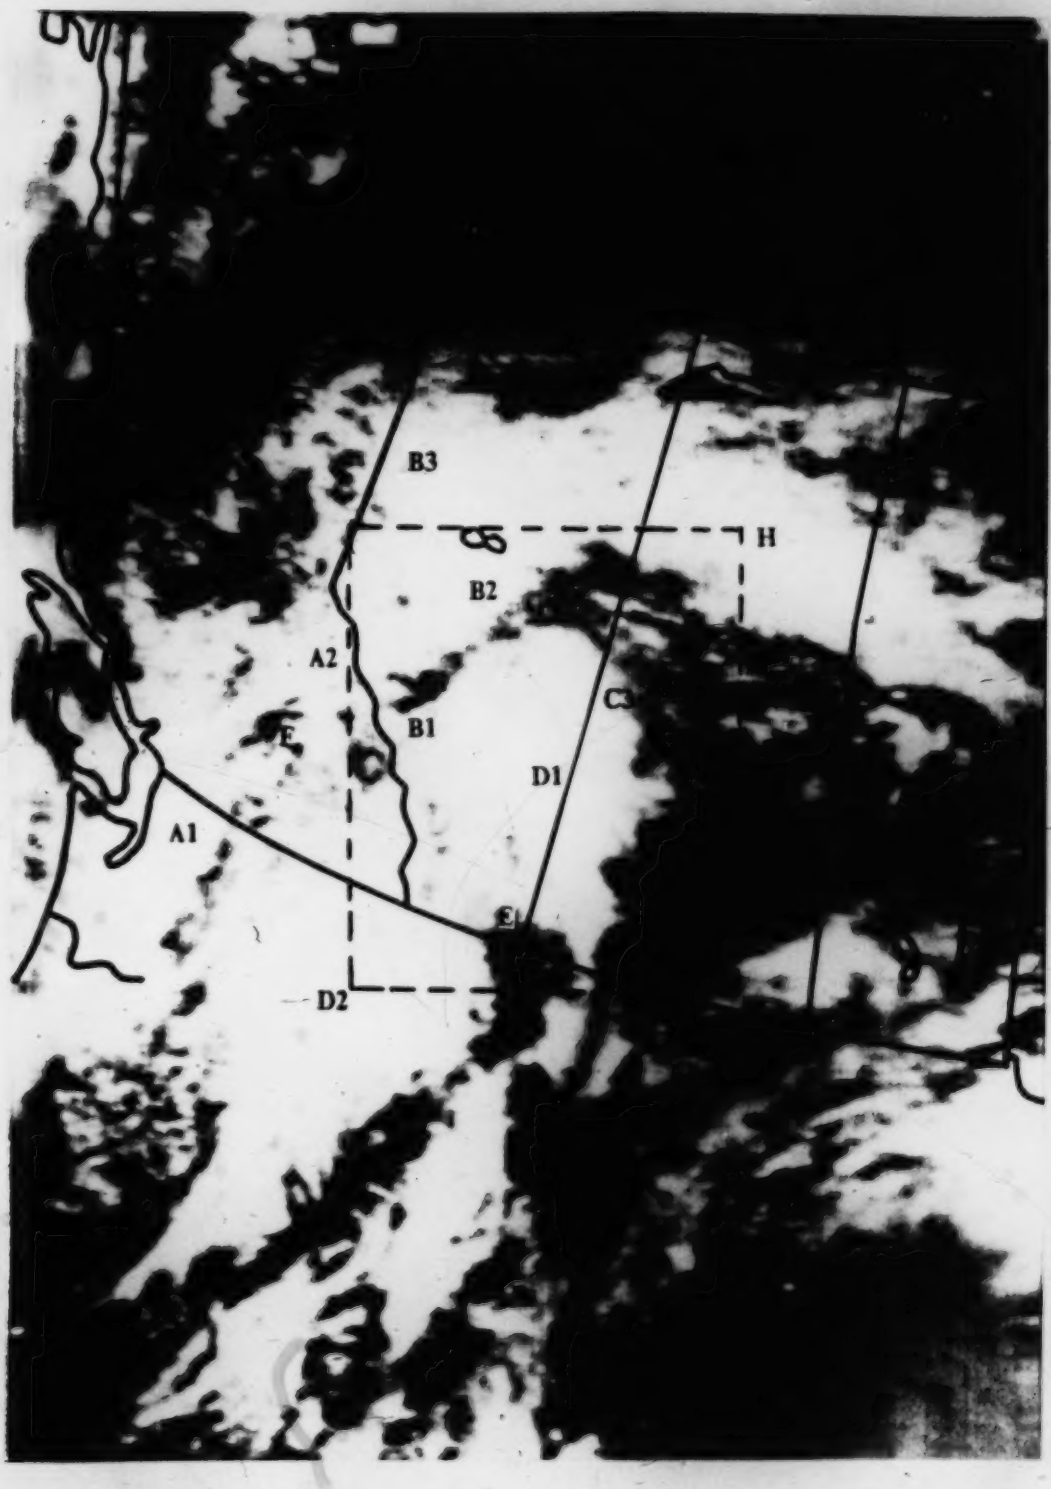

Figure 4.5 Visible Image of July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202.

4.2.2 July 17, 1986

By July 17, 0000Z (Fig. 4.6, 500-mb chart) the cold low (now filled to 558 dam), and the vorticity centre have moved north-northeastward at about 10 knots.

Twelve hours later (Fig. 4.7, 500-mb chart), the cold low has drifted northeastward to the Washington-B.C. border at about 7 knots, its central depth unchanged at 558 dam. However, the vorticity centre has increased its speed to 23 knots as it rotated cyclonically in the strong, southwesterly flow about the cold core.

The late-afternoon (0000Z) surface map is much more organized than the previous maps. Its most prominent feature is the long NW-SE trough, stretching from Central B.C. to Southern Alberta, and connecting with the large amorphous low-pressure system in North-Central U.S.. Most weather stations in Alberta and eastern B.C. report shower from towering Cu and Cb. The pressures are falling steadily in Southern Alberta.

By early morning (1200Z, Fig. 4.9) the surface pressures had fallen so rapidly that a vigorous cyclonic circulation had developed about a 1001 mb low centred South of Coronation. The cloud and precipitation area has expanded north of the centre, as northeasterly upslope winds near the surface, and over-running warm air aloft increased the flux of moisture into the system.

By about noon (1800Z, map not reproduced) the surface low had deepened rapidly to 996 mb in response to the vigorous positive vorticity advection to the east of the cold core (See Fig. 4.7 and 4.12). As it intensified, the low tracked north-northwestward and stalled just south of Edmonton.

Shortly thereafter, the next NOOA-9 satellite pass revealed that the cloud system of the storm had reached maturity. Both images (Figs. 4.10 and 4.11) show the well-formed comma cloud typical of major prairie rain storms.

The head of the open spiral is at A, and the "eye" of the storm at F. The bright dot at E in both images is an isolated Cb and active thunderstorm. The leading section A-B of the spiral consists of a thick layer of nimbostratus (Ns) with heavy, embedded convective clouds (Cb and Cu*). The cloud tops are very cold (about -50°C) and extend to heights of the order

of 12 km. The grey shades C1-C2 in the tail of the comma (IR, Fig. 4.10) indicate the top surface of a lower layer of the middle clouds, mostly As, but with higher turrets of Acc visible near C1. Both images also show the clearing zone D, an open area of low albedo containing a curved band of Ac and TCu, and a scattering of lower cumuliform cloud.

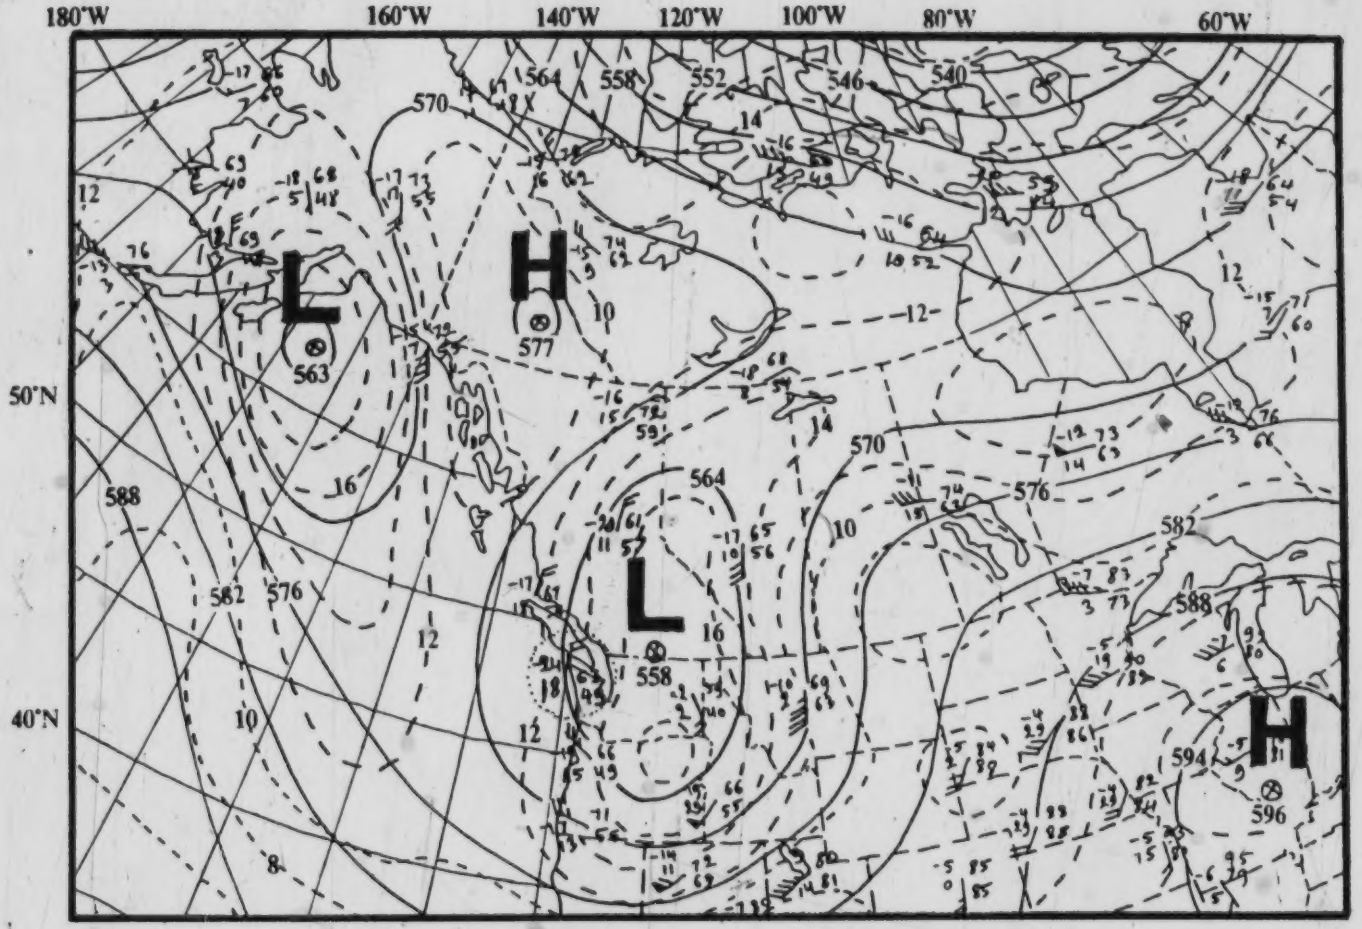

Figure 4.6 500-mb map for 0000Z July 17, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

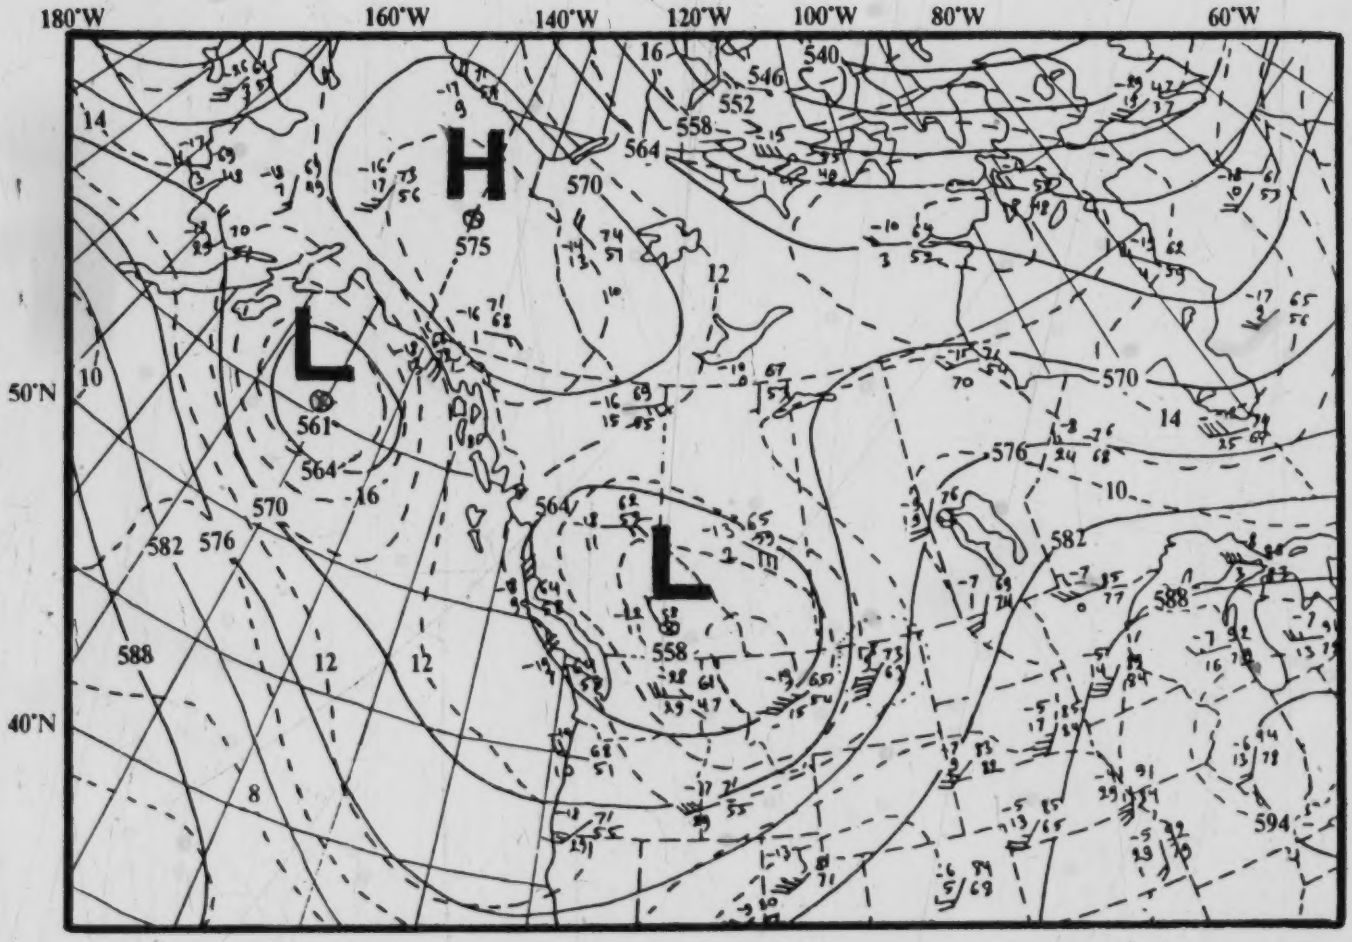

Figure 4.7 500-mb map for 1200Z July 17, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

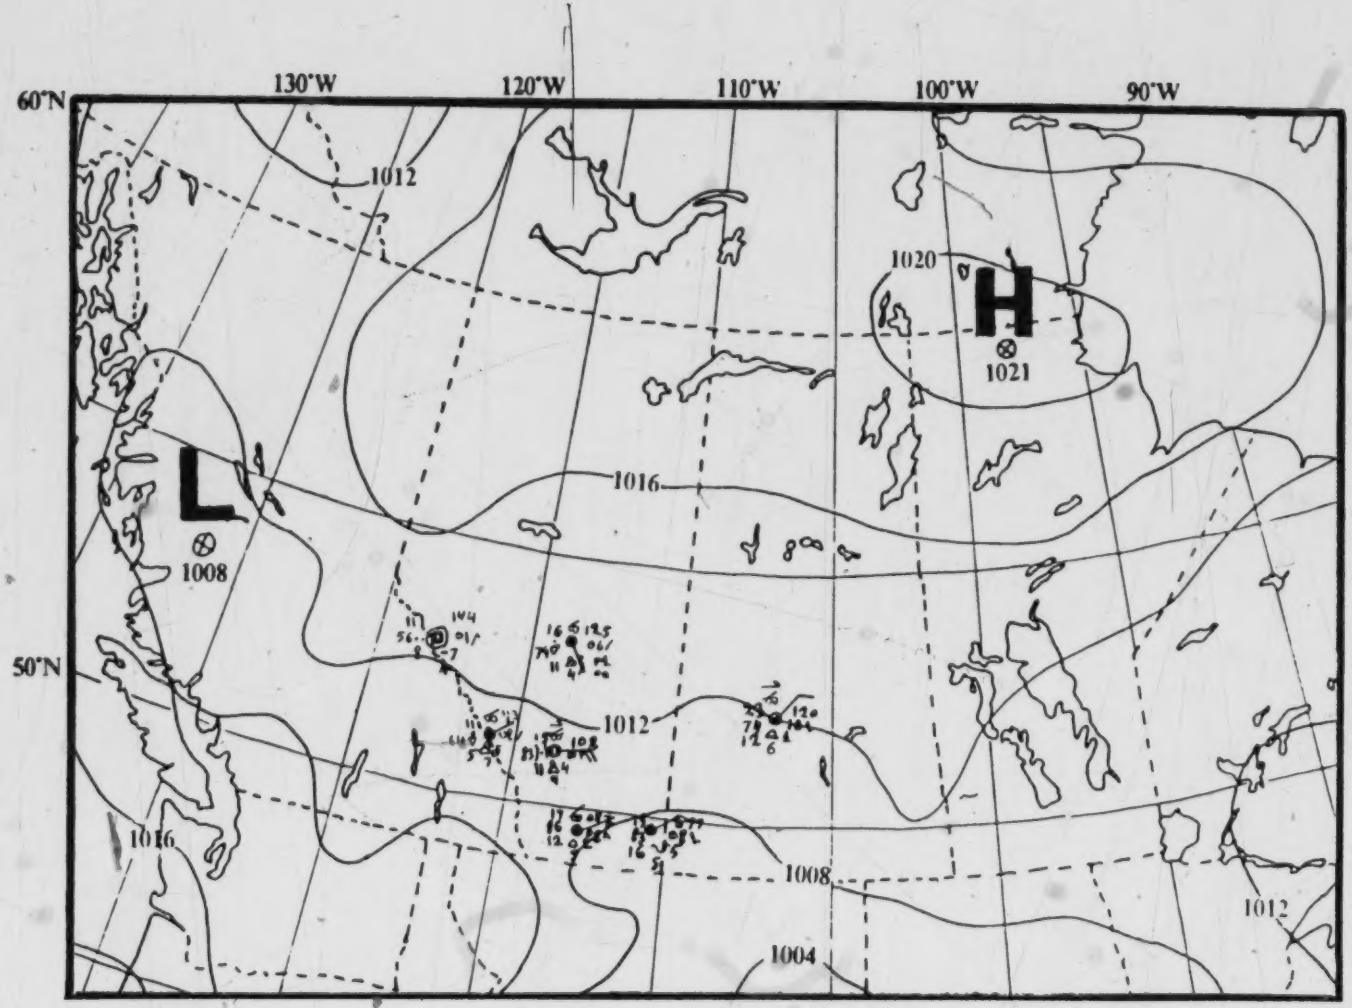

Figure 4.8 Surface Analysis map for 0000Z July 17, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

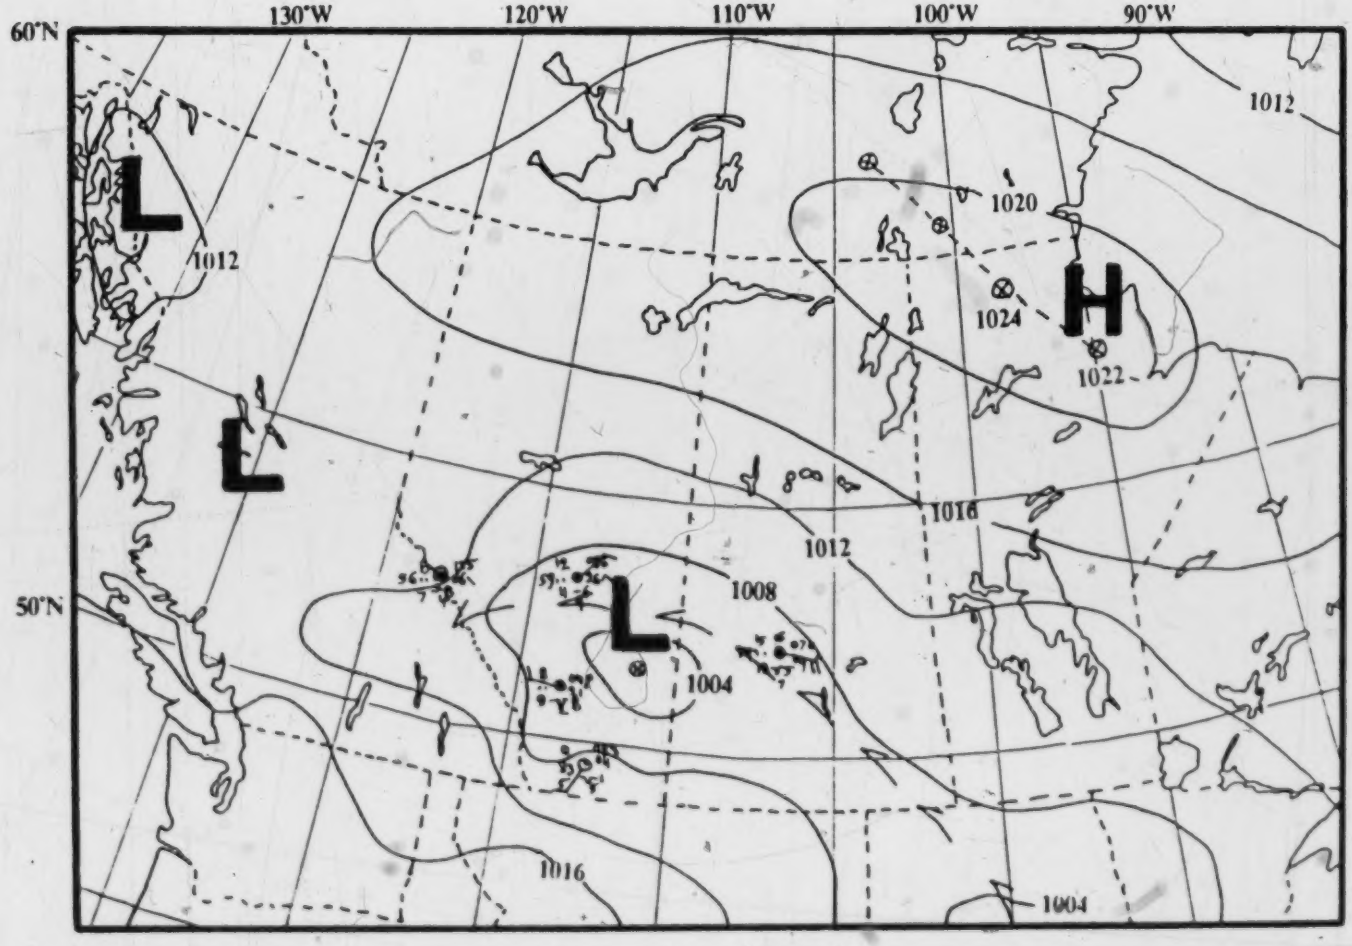

Figure 4.9 Surface Analysis map for 1200Z July 17, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

Figure 4.10 Infrared Image of July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216.

Figure 4.11 Visible Image of July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216.

4.2.3 July 18, 1986

During the next 12 hours the cold low suddenly deepened to 552 dam, intensifying as it crossed the Rocky Mountains near Pincher Creek at 29 knots, while the vorticity centre lagged behind at 22 knots. By late afternoon (0000Z, July 10) the cold core has passed to the east of Edmonton (Fig. 4.12). Continuing eastward, the cold core reached Saskatchewan by early morning (Fig. 4.13), the system has now entered the dissipating stage, filling rapidly and becoming absorbed into the major long-wave trough dominant in the Hudson Bay-Lake Winnipeg region.

The surface maps for this period (Figs. 4.14 and 4.15) reflect and closely follow the events in the upper air. In phase with the cold-core intensification, the surface centre has reached maximum develpoment by 0600Z, July 18 (chart not shown) but thereafter, though grown in size, the low has entered a guiescent stage as it moved rapidly toward Hudson Bay.

The satellite images from the afternoon pass of NOAA-9 (Figs. 4.16 and 4.17) show the well-advanced breakup of the storm. The spreading canopy of the comma cloud is still discernable over northern Manitoba and Hudson Bay, ending in a diffuse tail west of James Bay. A large, generally clear area, has opened up to the southwest.

The small, circular dark area near E marks the eye of the aging cyclonic system. The convoluted, bright region C-F in both images represents the remains of the comma head-cold, high cloud of Cb tops and embedded, cells of Cb and Cu*.

Bright (and cold) cyclonic streamers of Cirrus are visible in the IR (Fig. 4.16) over northern Saskatchewan and eastern Alberta. Below the Cirrus (and best seen in the visible-band image, Fig. 4.17) are numerous cellular masses of Sc, Cu, Cu* and Cb. This convectiive cloud developed in the northerly flow of a cold, unstable air mass, the result of cold-air advection in the wake of the storm.

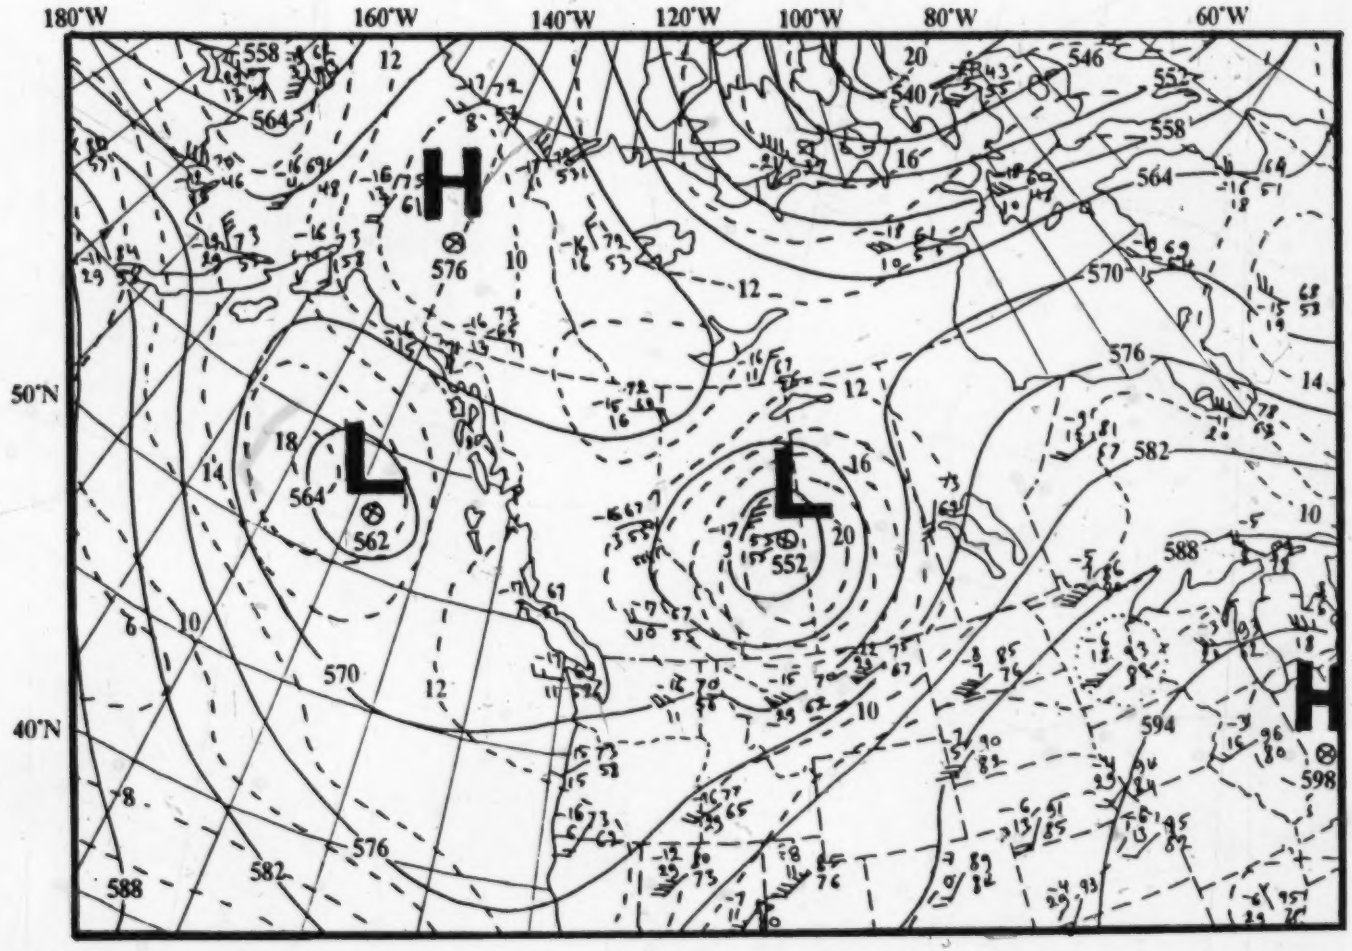

Figure 4.12 500-mb map for 0000Z July 18, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

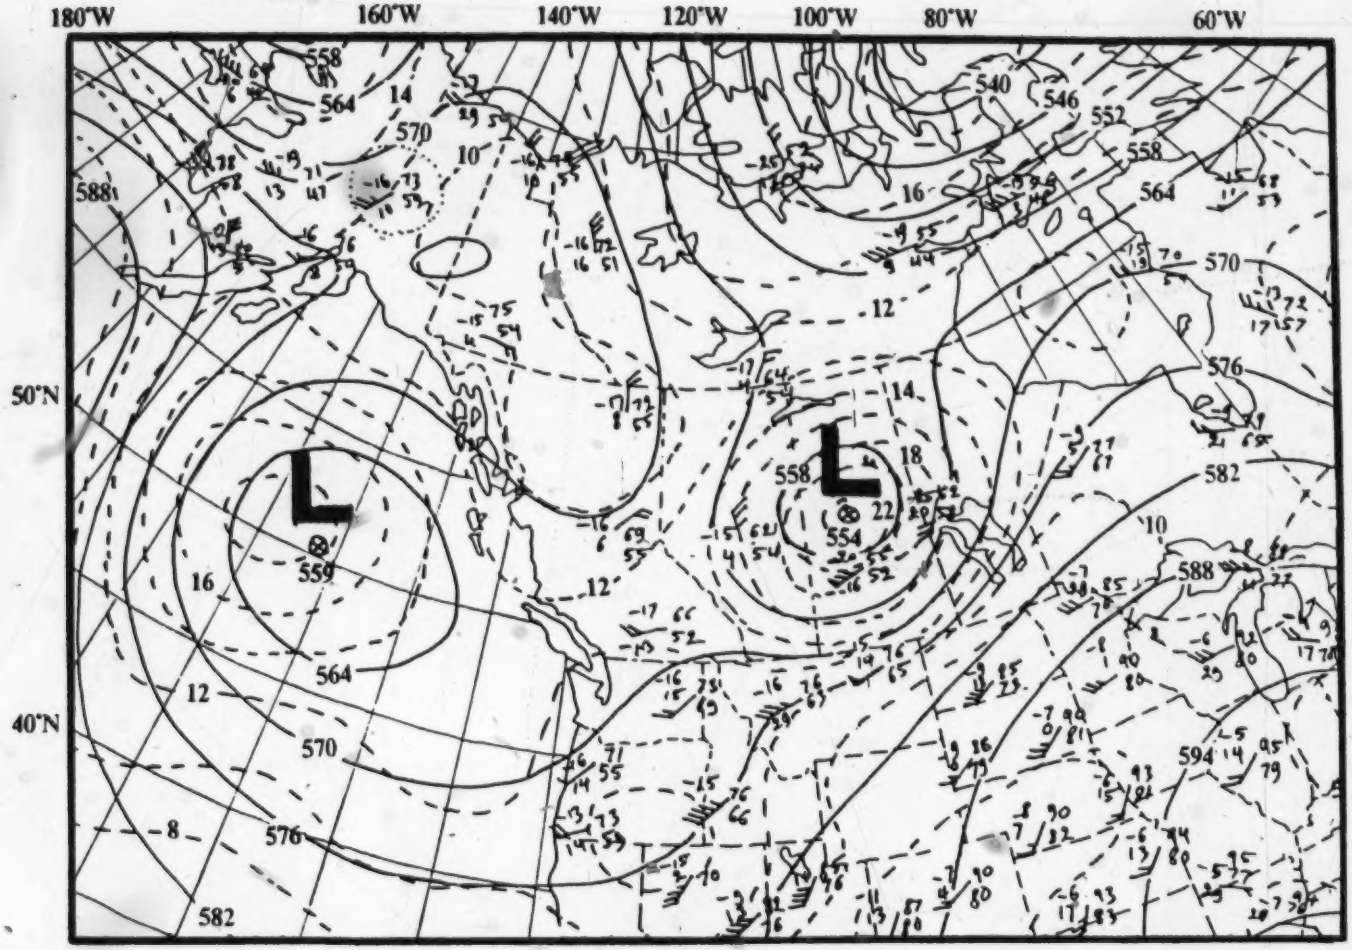

Figure 4.13 500-mb map for 1200Z July 18, 1986. Redrawn CMC height and vorticity analysis. Solid lines are geopotential height contours at 60 m intervals. Dashed lines are vorticity contours at intervals of 2×10^{-5} rad sec^{-1}.

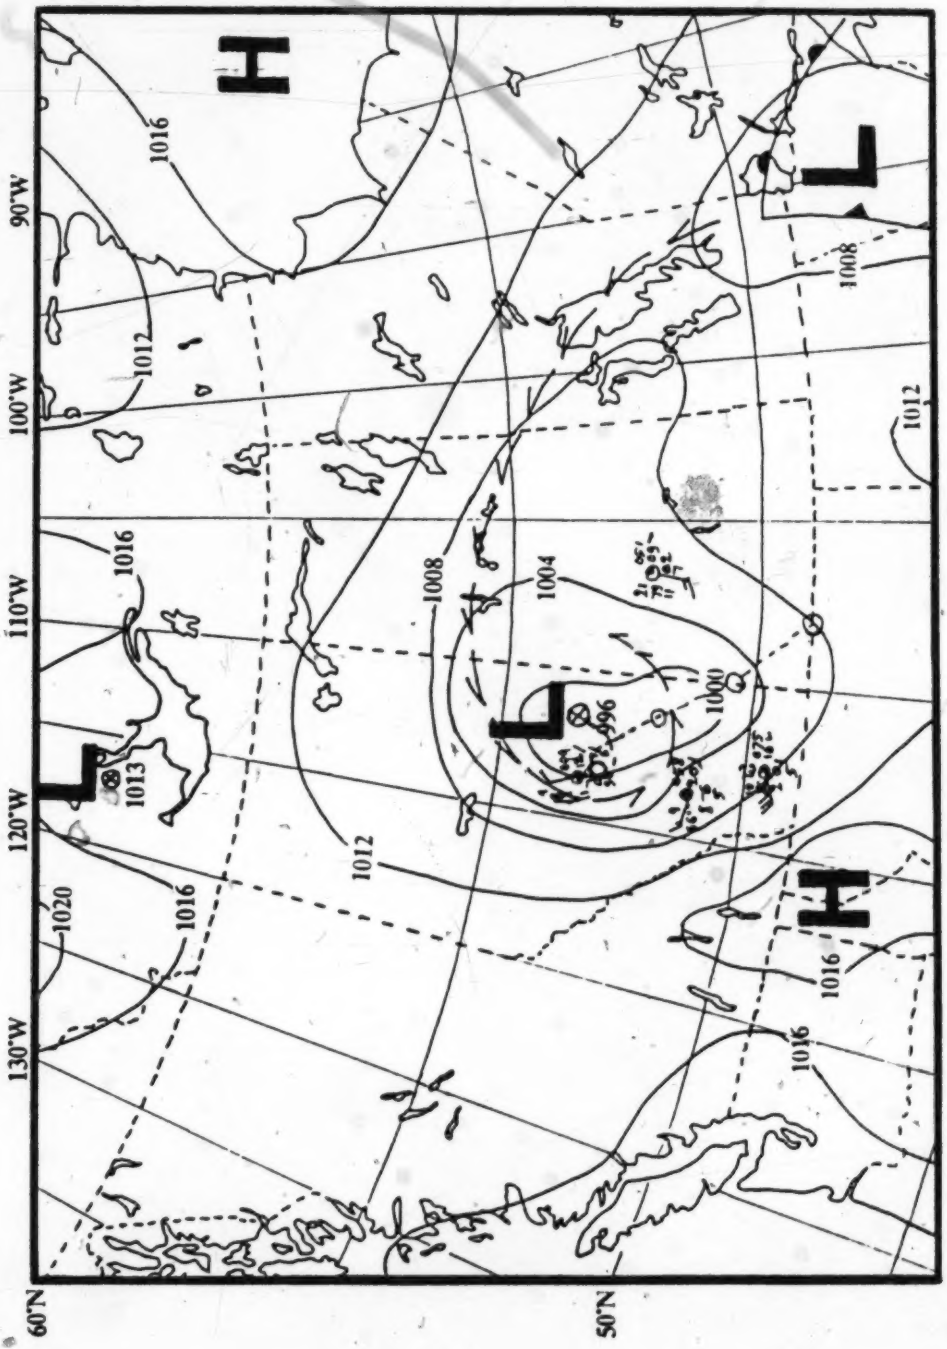

Figure 4.14 Surface Analysis map for 0000Z July 18, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

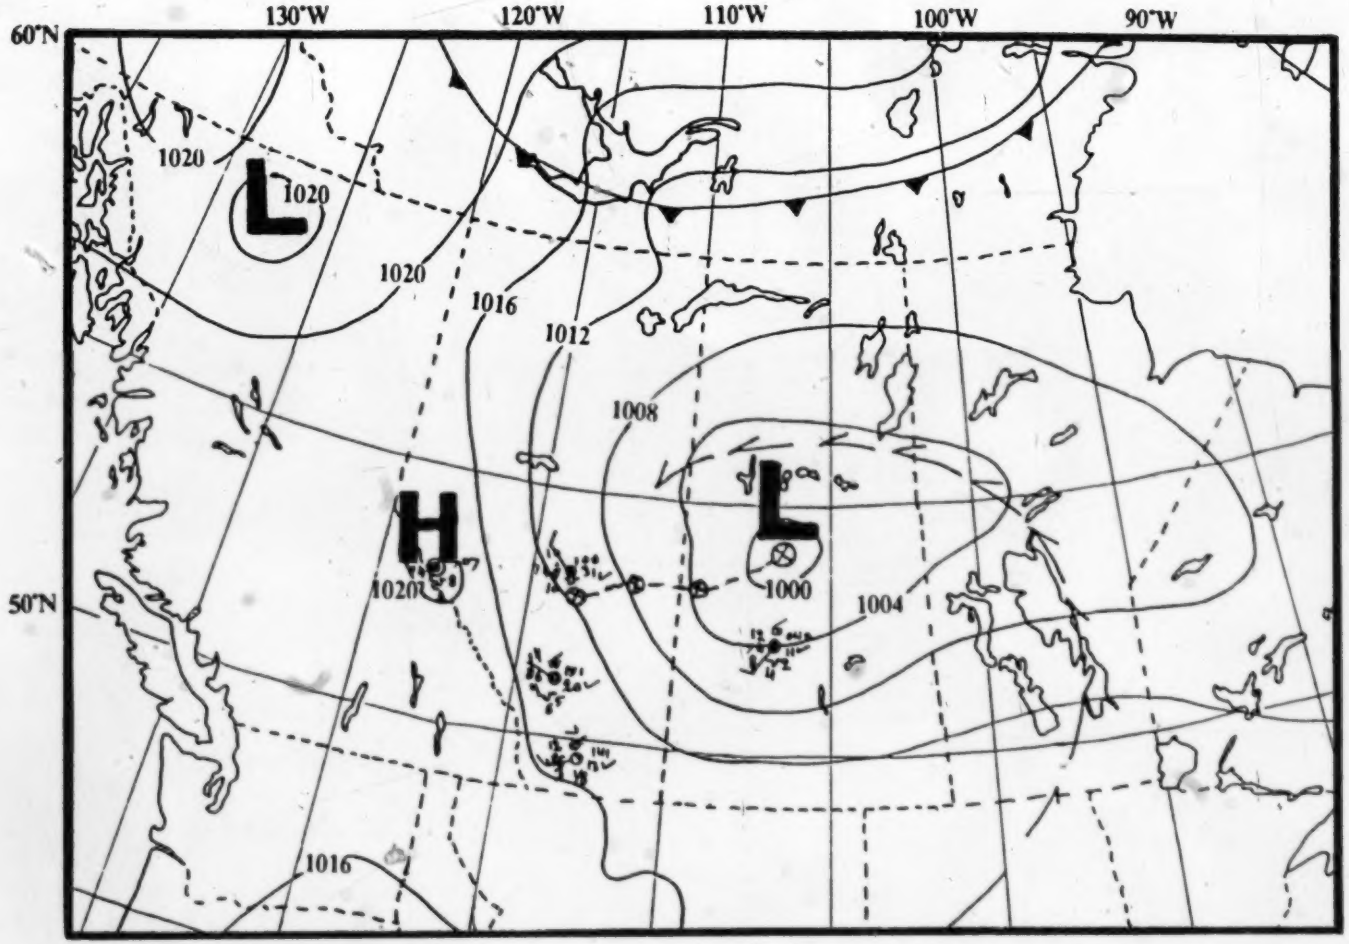

Figure 4.15 Surface Analysis map for 1200Z July 18, 1986. Redrawn AWC Sea-level isobars at 4 mb intervals.

Figure 4.16 Infrared Image of July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230.

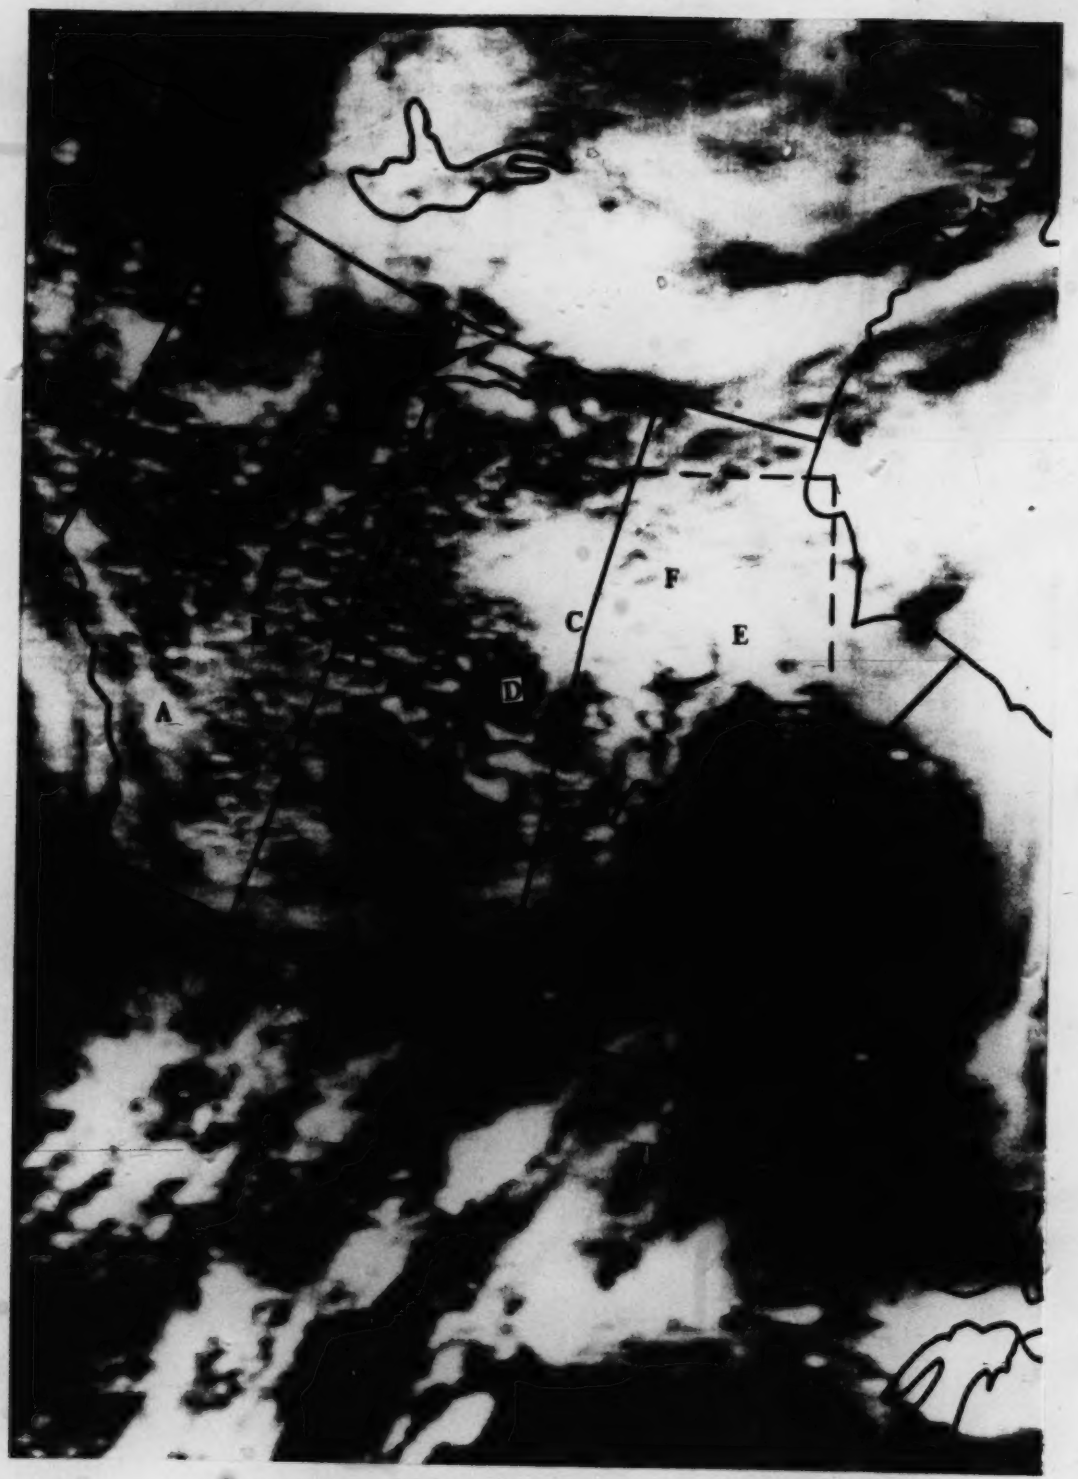

Figure 4.17 Visible Image of July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230.

4.3 Numerical Analysis and Graphical Display of the July Storm

The equivalences introduced in Chapter 3 are still considered to be valid in July, even though the convective clouds in mid-summer are likely to be more numerous and build up to greater altitudes. Most active Cbs reach or even penetrate the tropopause which over Edmonton (Stony Plain), before the arrival of the cold core, was located at a height of 11.2 km. Radiosondes sampling the cold core, such as at Vernon B.C. (see Fig. 4.21) measured the tropopause at 8.5 km.

Surface temperatures in the warm, largely clear areas would also be higher in July than in May. This in turn would normally lead to higher dewpoints and increasing moisture in a warmer and convectively unstable air mass. These differences are important and have been considered in the analysis of the July storm.

Heavy snow, not unknown in July, fell on the higher ground of the western foothills, but on the open prairie most of the precipitation come in the form of rain and occasional streaks of hail.

4.3.1 July 16, 1986

The thermal and brightness features within the squares outlined in the satellite images of Figures 4.4 and 4.5 have been analysed and plotted in Figures 4.18 and 4.19, respectively.

The area shown does not contain the cold core itself, but a large complex of cloud, covering much of east-central Alberta and Saskatchewan. This thick and very bright mass has cloud-top temperatures as low as -55°C, an indication that most of it extends right to the tropopause level. Judging by the surface reports, the cloud complex was made up of a thick layer of Ac and Acc, interspersed with numerous TCu and Cbs. Frequent showers and thunderstorms were experienced in all districts throughout the day, with the heaviest rain in the Edmonton-Whitecourt region, and snow in the foothills.

The isotherm and brightness patterns also hint at the formation of the comma cloud. The broad, warm sector in Saskatchewan (surface temperatures 25 - 28°C) narrows and curves westward toward Edmonton and Banff, indicating the presence of a southeasterly circulation

in advance of the approaching cold low, and the influx of warm, moist air.

The 3-D representation of the thermal field (Fig. 4.20) shows the extent and texture of the cloud complex, with many peaks projecting to the -55°C tropopause level. Also shown clearly is the steep "cliff" of the cloud bank (in the vicinity of the 114°W meridian) and the steep descent to the lower deck of much warmer cloud to the west. The warmest surface air is present in southern Saskatchewan, with maximum values as high as 28.8°C

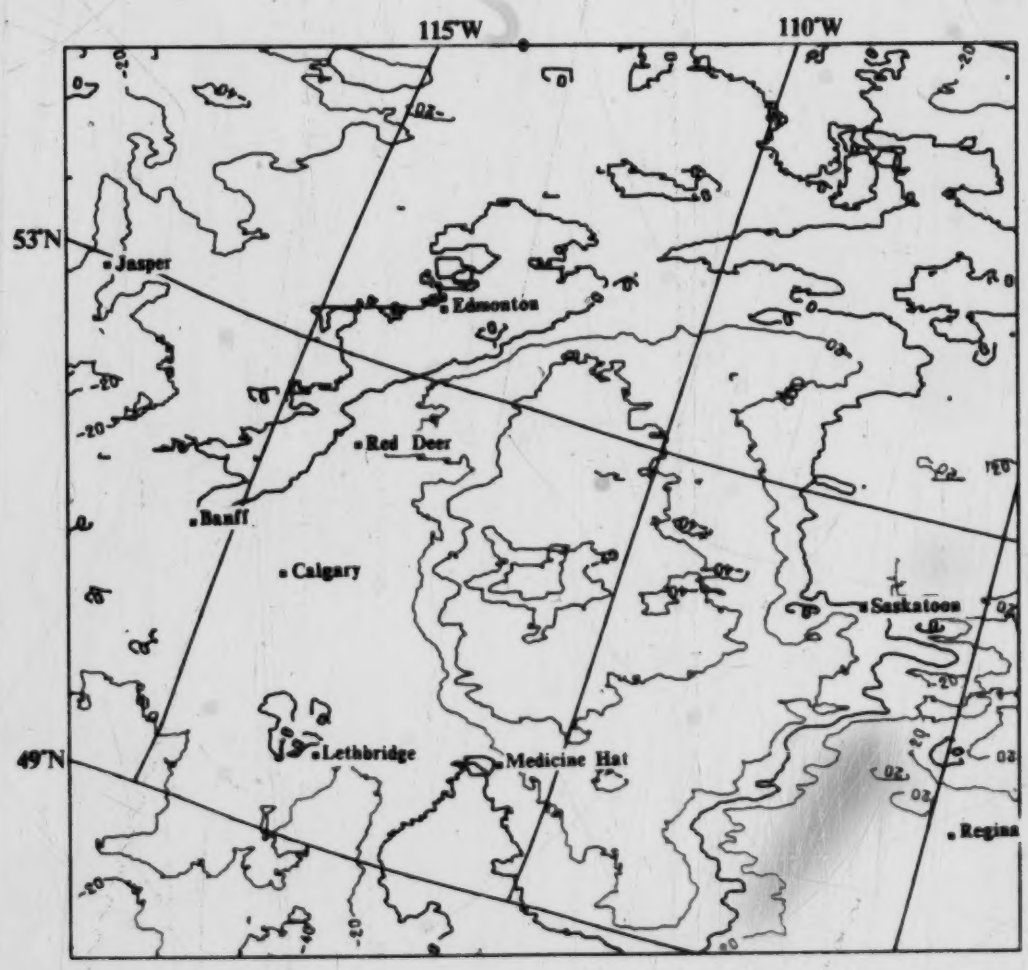

Figure 4.18 IR-derived isotherms for July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202, temperature (T) in °C, with isotherm interval 20°C.

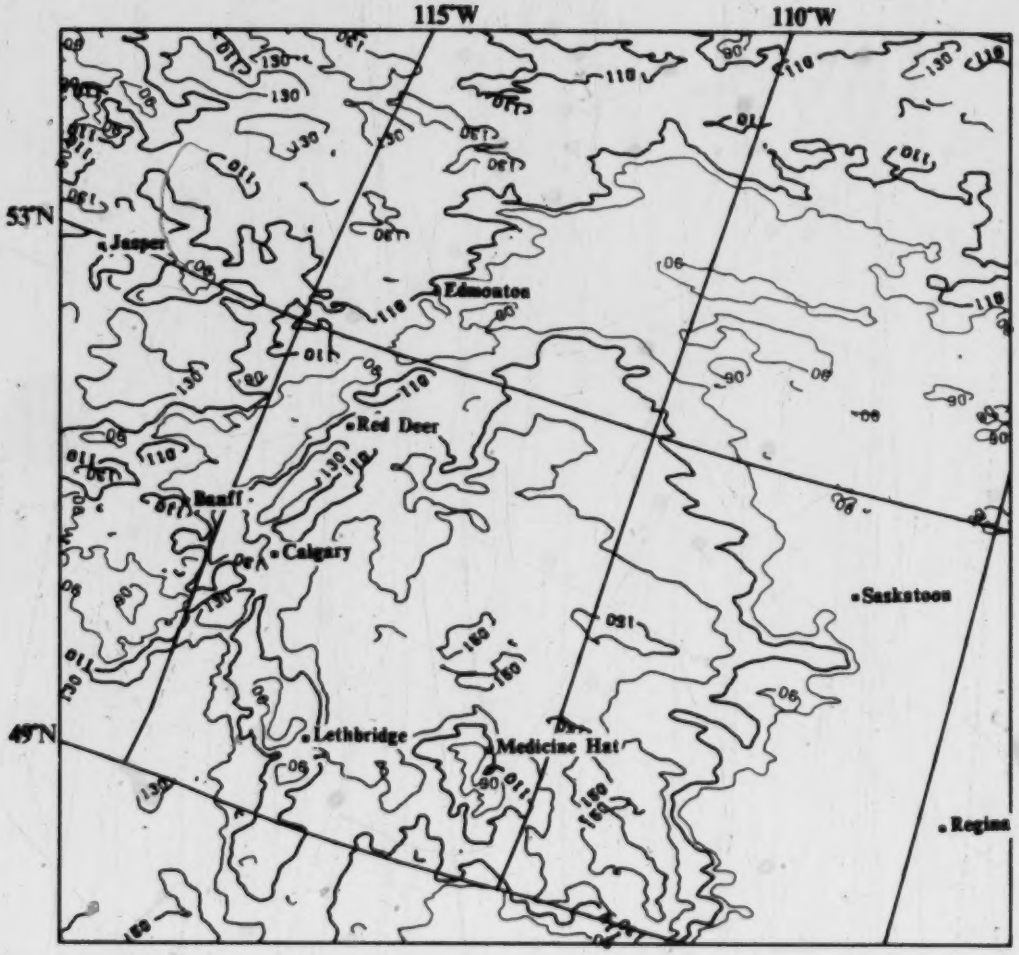

Figure 4.19 Brightness isopleths for July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202, isopleth interval 20 counts.

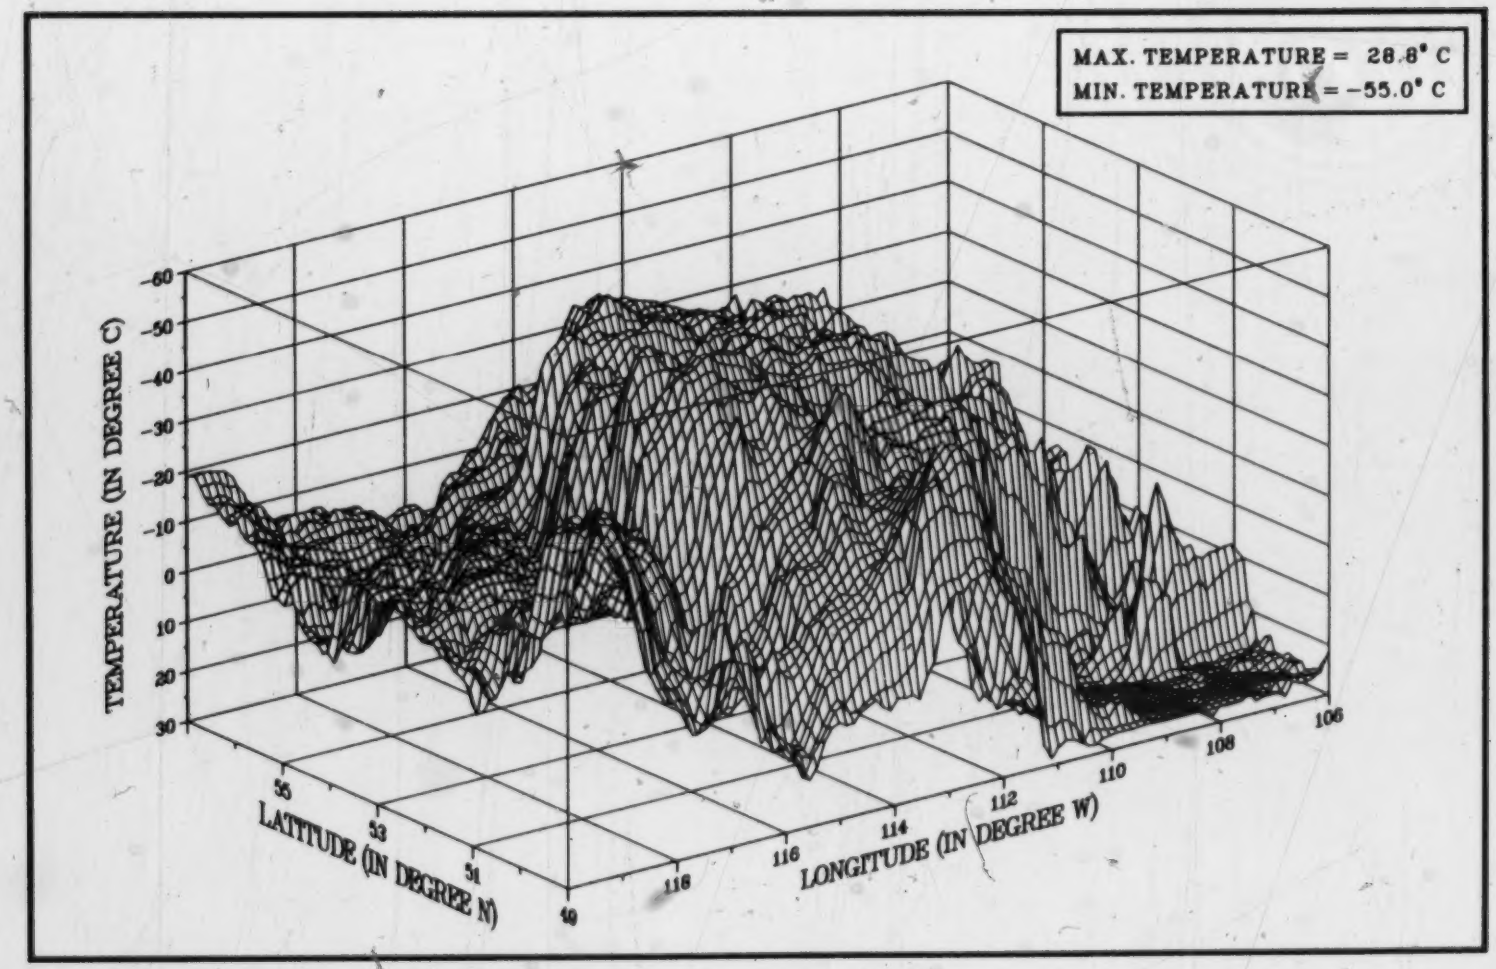

Figure 4.20 IR-derived 3 Dimensional temperature field of the cold-low area (49-57°N, 106-120°W) for July 16, 1986 at 2105-2121Z, NOAA-9 orbit 8202.

4.3.2 July 17, 1986

The now "classical" open spiral of the comma cloud is the dominant feature in Figs. 4.22 and 4.23, the thermal and brightness plots of the area marked on the respective images of Fig. 4.10 and 4.11. The storm, though still well organized and mature, has however gone past the stage of maximum development when judged by the size of the precipitation area. This is shown better on the series of radar scans, presented in Section 4.4.

The brightest, thickest and coldest cloud extends in a well-formed arc from the comma head SE of Calgary, to the west of Edmonton, then NE to the Cold Lake area and eastward into Saskatchewan. The prominent warm sector "dry slot" is particularly well defined in the brightness plot (Fig. 4.23) by the sharp edge of the cloud curving through Saskatchewan. Distinct bands of cumuliform cloud are visible in the northern and western rim of the warm sector.

The IR-derived plot of Fig. 4.24 shows most of the spiral, including the extensive, high bank of the main complex to the north and east, topped by many peaks and turrets at temperatures lower than -55°C. The massive cloud composing the head of the comma is separated from it by a col, and hides from view the steep western bank of the warm sector.

As mentioned earlier with respect to tropopause heights, Fig. 4.21, the 1200Z radiosonde plot from Vernon, B.C., is of interest in that it shows an ascent close to the cold core. It will be noted that, except for some mid-level moisture in the 750 - 700-mb layer, the air mass is very dry above 600 mb. This is an indication that the moisture flux feeding the storm came from the southeast (i.e. Saskatchewan) rather than from the cold core.

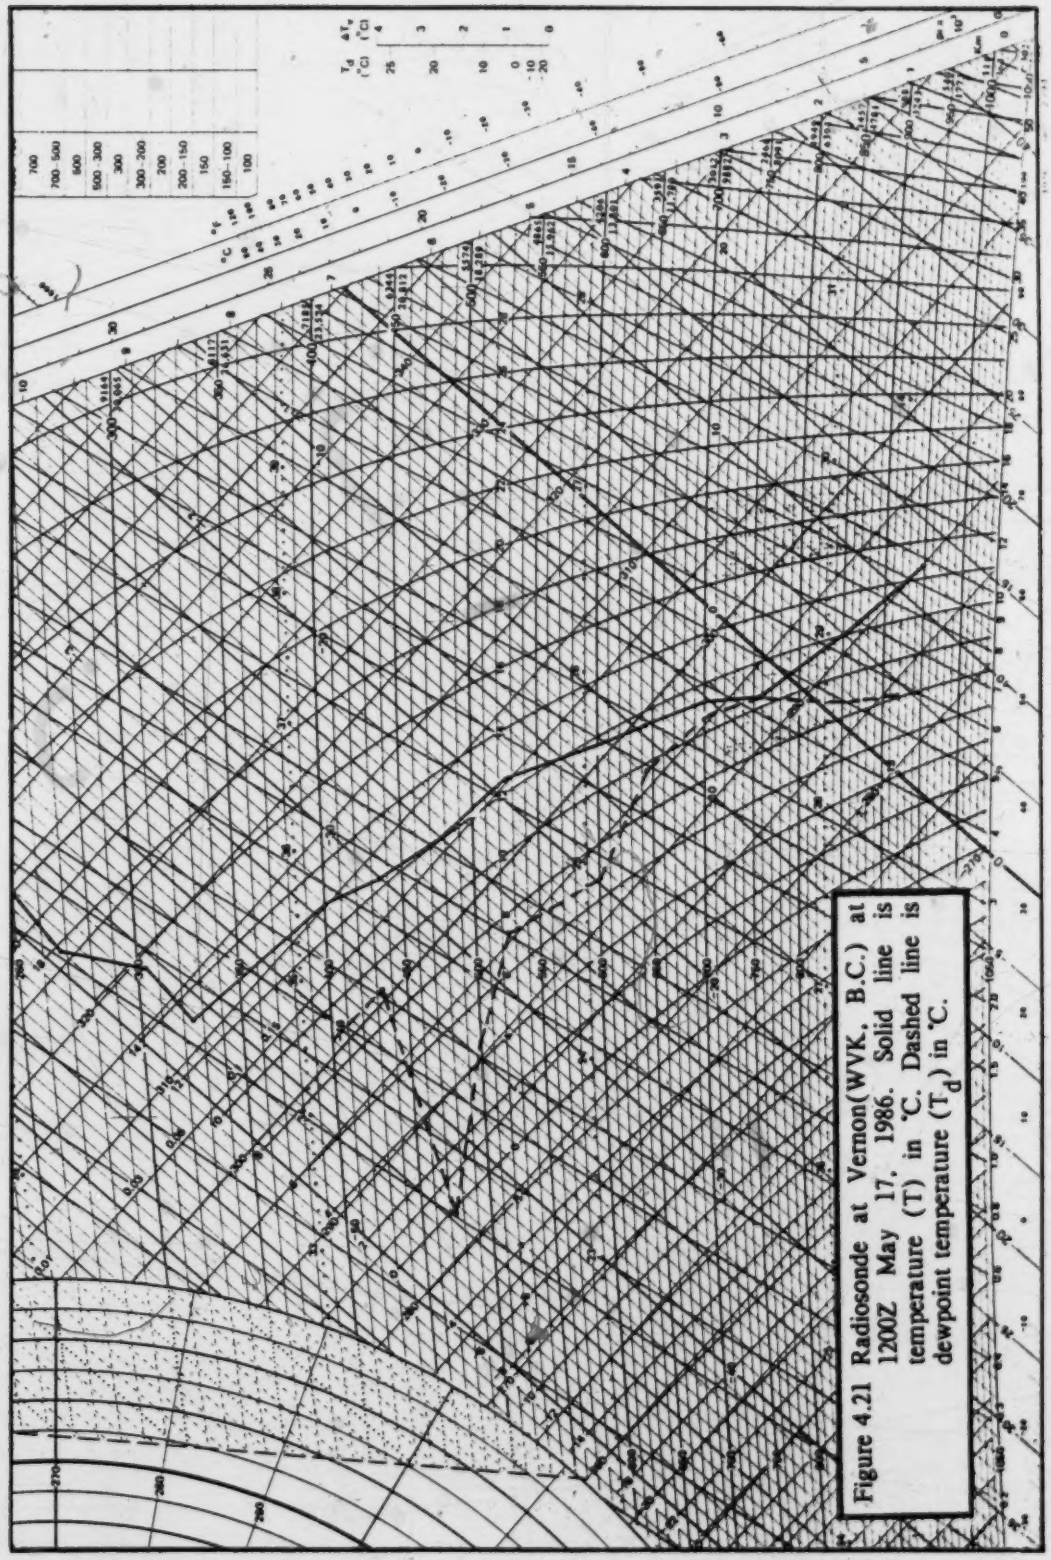

Figure 4.21 Radiosonde at Vernon(WVK, B.C.) at 1200Z May 17, 1986. Solid line is temperature (T) in °C. Dashed line is dewpoint temperature (T_d) in °C.

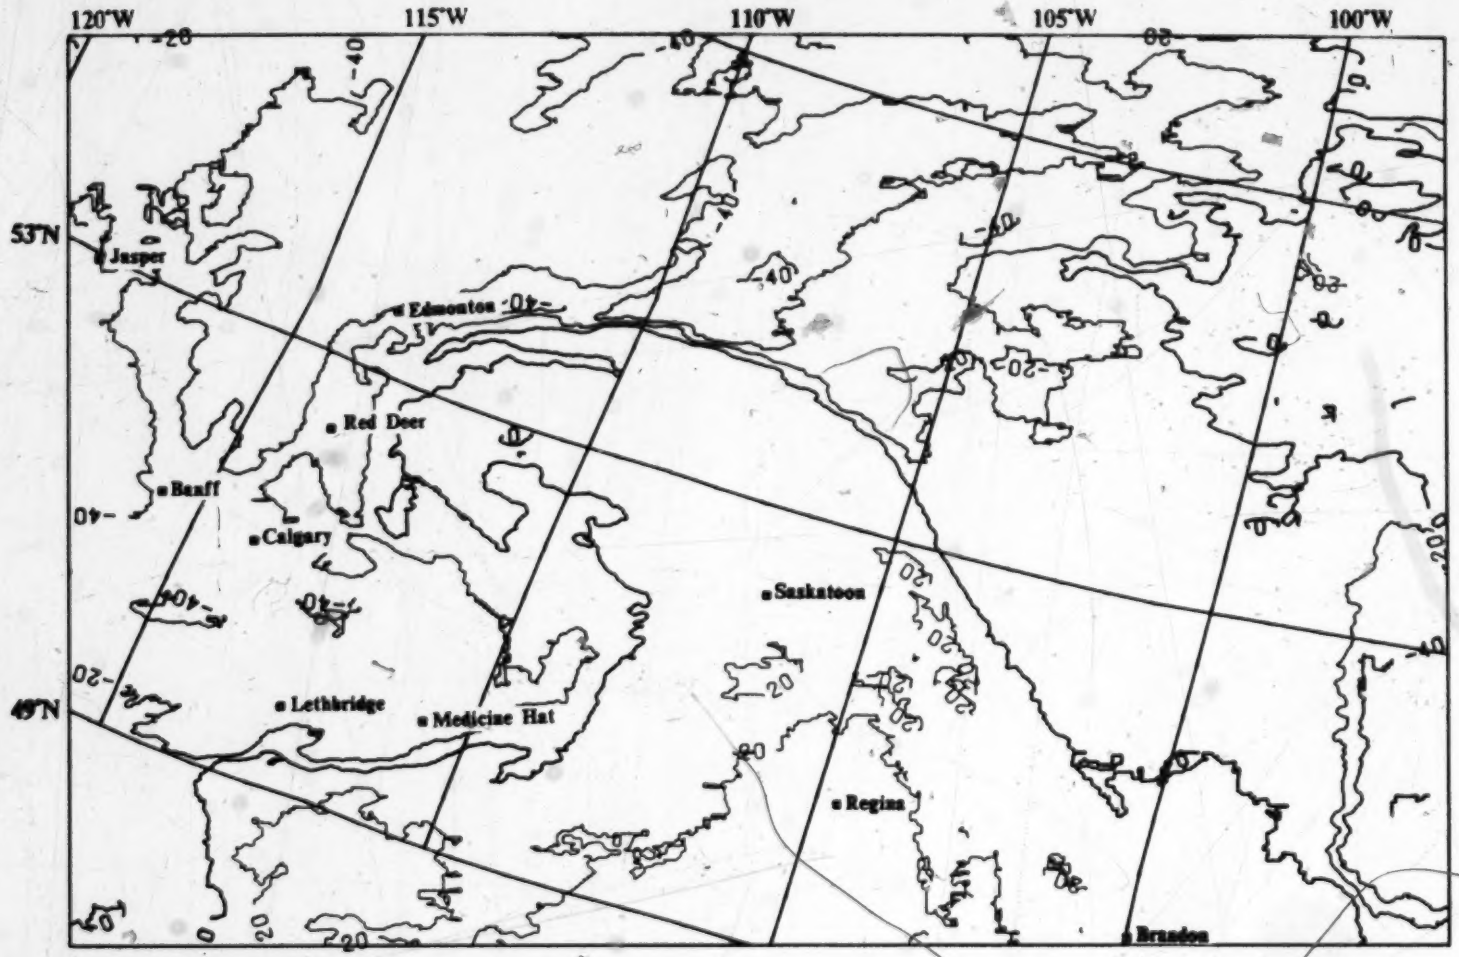

Figure 4.22 IR-derived isotherms for July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216, temperature (T) in °C, with isotherm interval 20°C.

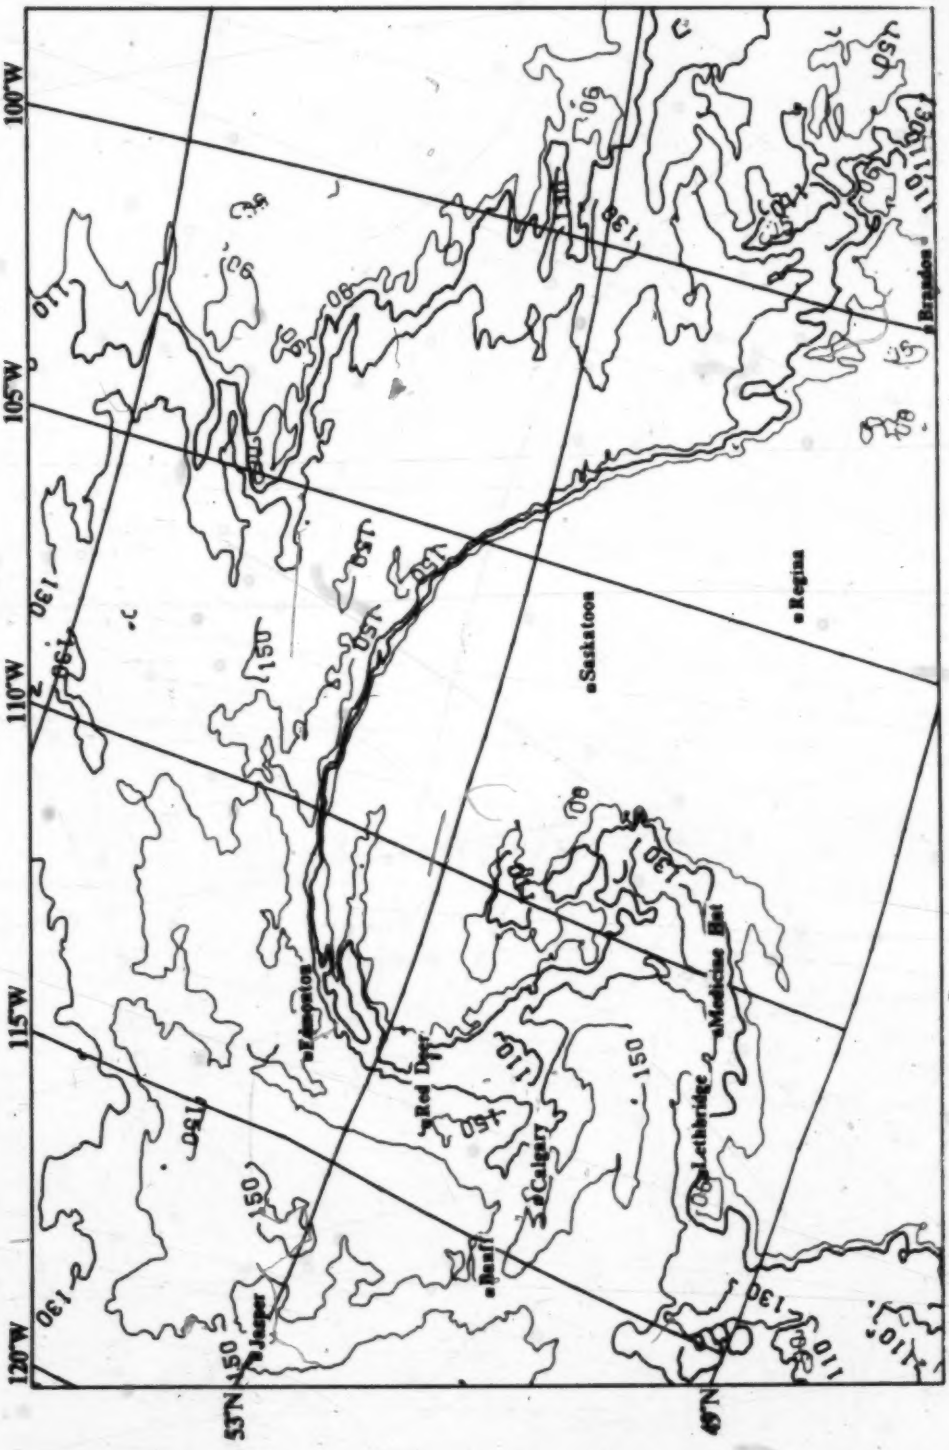

Figure 4.23 Brightness isopleths for July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216, isopleth interval 20 counts.

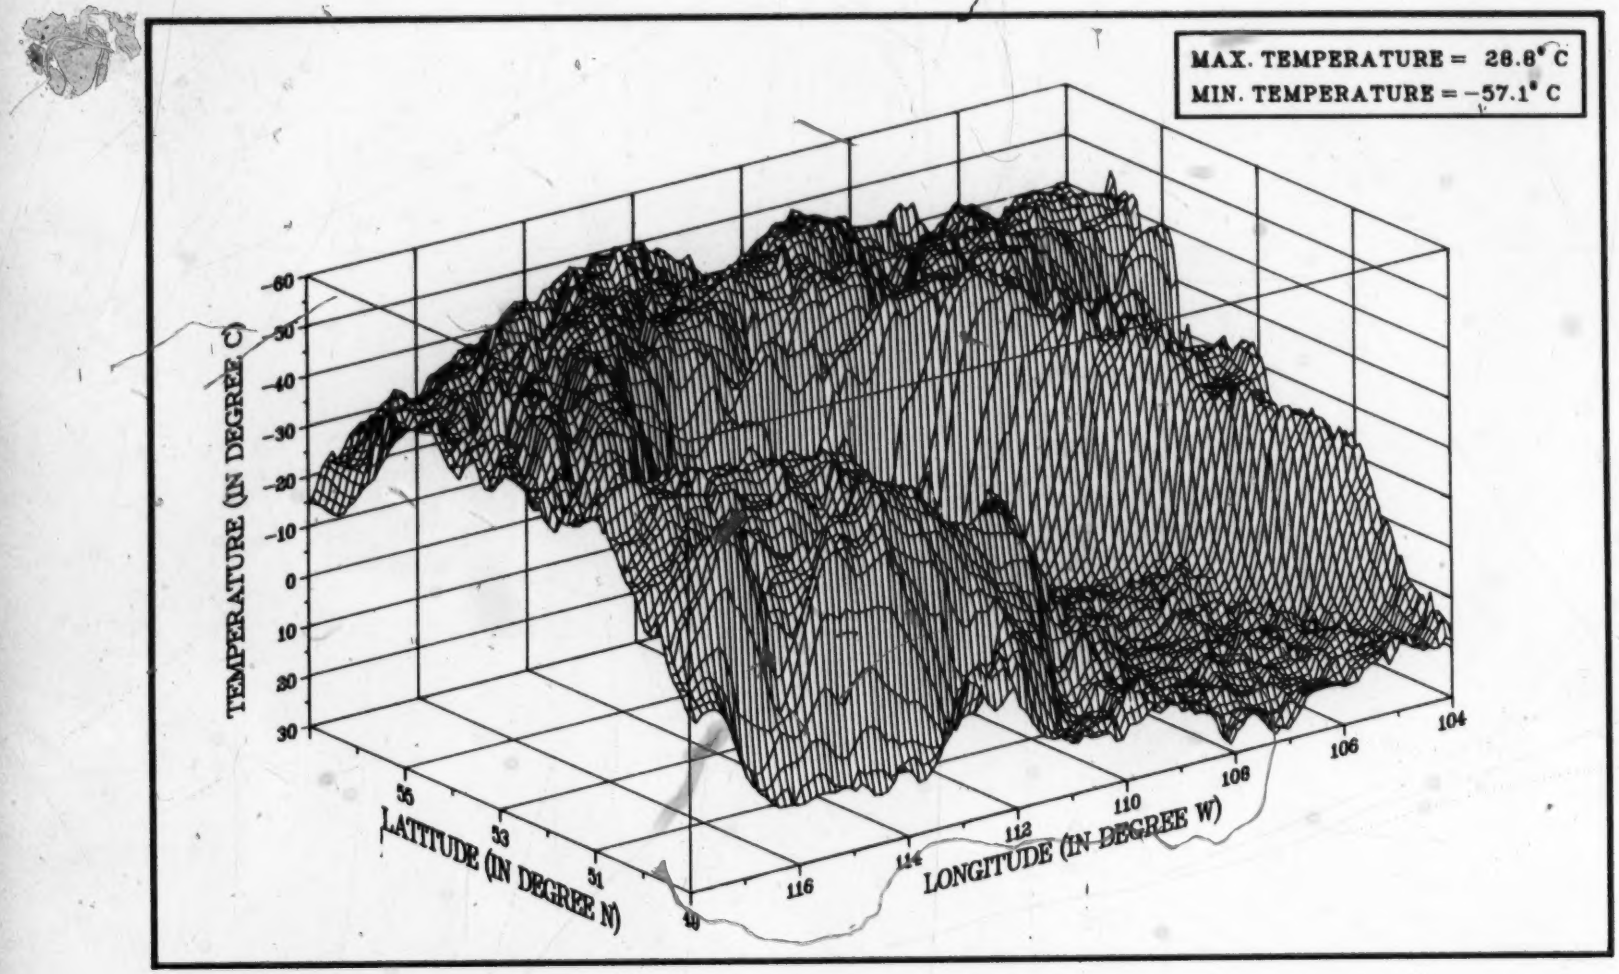

Figure 4.24 IR-derived 3 Dimensional temperature field of the cold-low area (49-57°N, 104-118°W) for July 17, 1986 at 2054-2110Z, NOAA-9 orbit 8216.

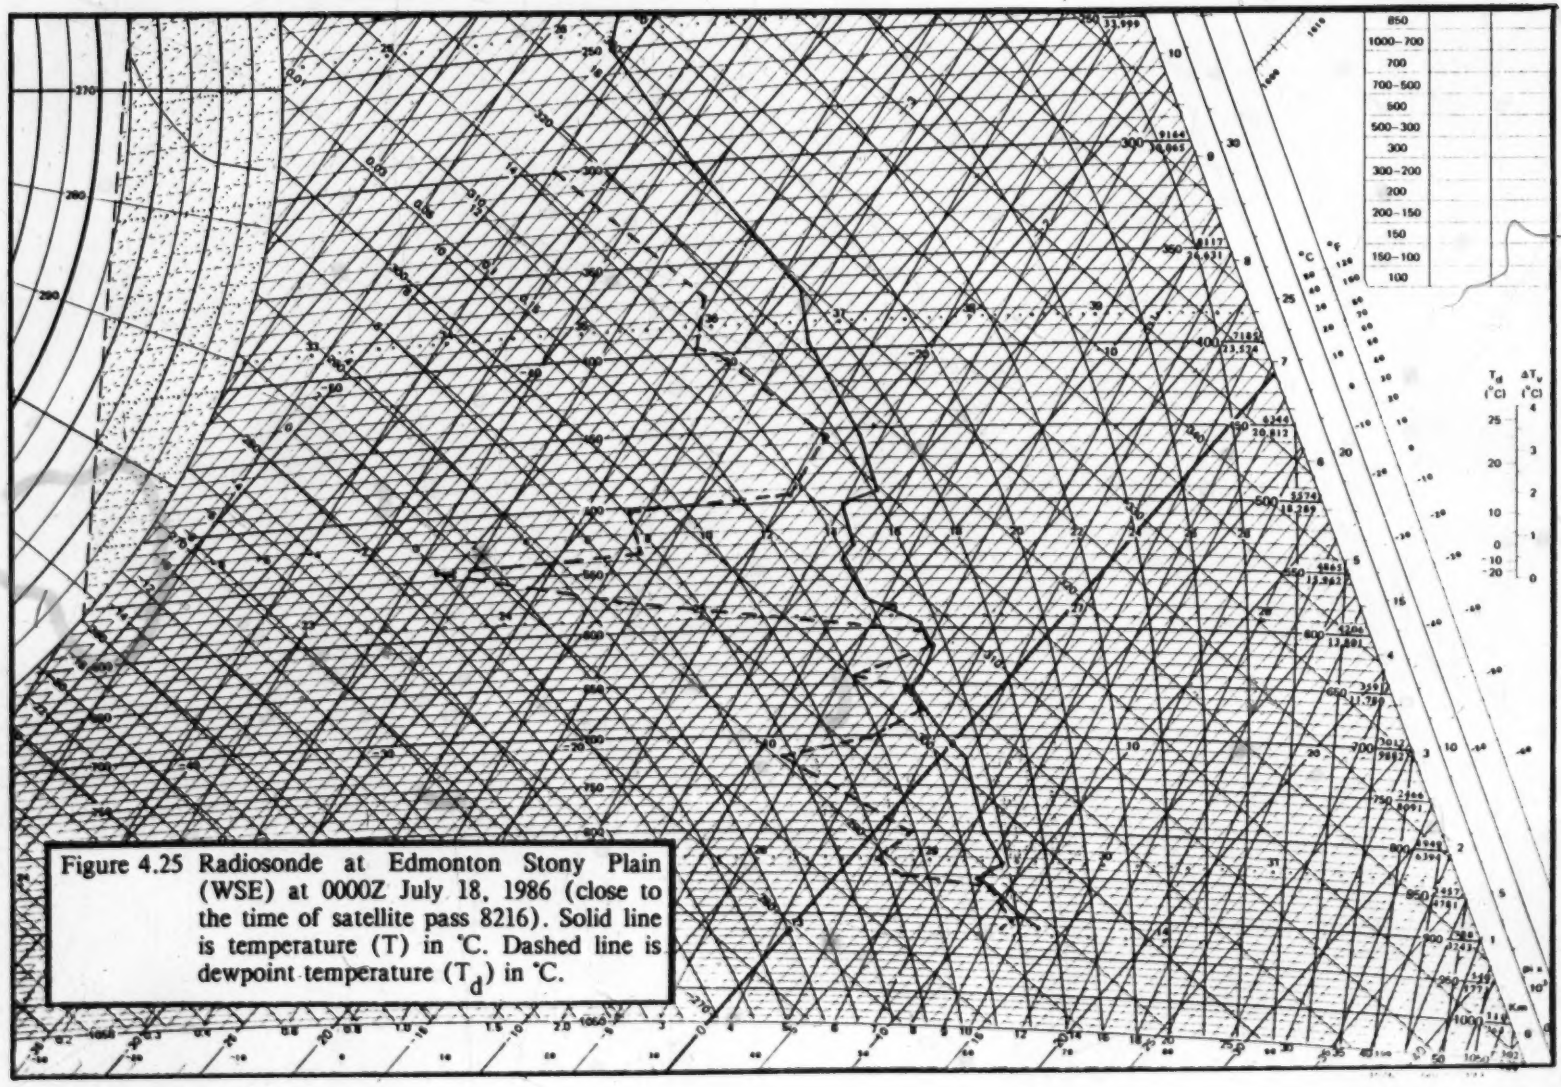

Figure 4.25 Radiosonde at Edmonton Stony Plain (WSE) at 0000Z July 18, 1986 (close to the time of satellite pass 8216). Solid line is temperature (T) in °C. Dashed line is dewpoint temperature (T_d) in °C.

4.3.3 July 18, 1986

By 0000Z, July 18 (18:00 MDT, July 17) the cold core had crossed the Rockies, slipped to the south of Edmonton, and superimposed itself onto the surface low. Thereafter, the combined system accelerated and moved rapidly across Saskatchewan, as the cold core began to weaken. Twenty-four hours later (0000Z, July 19) it had all but dissipated and been absorbed into the long-wave trough over Manitoba.

The mid-afternoon July 18 advanced phase of the breakup is depicted in the thermal and brightness plots of Figs. 4.26 and 4.27. The principal cloud mass has moved to Manitoba and become associated with the long-wave trough. To the west, the skies are filled with broken clouds, most of it cumuliform, which developed in the cool, unstable air left in the wake of the storm. Many of these clouds have grown to the shower stage, and a few into active thunderstorms. Only vestiges of Ac and Cs are left behind, as reminders that the cold low has truly passed. The sounding from WSE (Fig. 4.26) on July 18, 0000Z (close to the time of the satellite pass 8216), indicates that cumuliform cloud (Fc, Cu, Sc) is present in the surface layer with tops to about 1.3 km (840 mb). A thin stable inversion layer extends for about 200 m above the unstable layer. Two saturated layers are also present between 670 - 650 mb and 620 - 600 mb. Thin broken decks of Ac and As are indicated with bases, respectively, at 3400 and 4000 metres and each about 200 m thick. A Cs layer has its base at 5.5 km and top at 6.3 km. The cloud-top temperature of this layer is at about -18°C, which is close to the satellite-derived temperature (about -20°C). The height of the tropopause is about 10.4 km. Decreasing dewpoints are characteristic of subsidence of the air mass in at least two layers, namely 1.5 to 2.8 km, and 4.2 to 4.8 km.

Figure 4.28, the 3-D representation of the thermal field, provides a parting view of what is left of the comma -- now an amorphous shape no longer as high and cold (just -49.1°C) as 24 hours earliers. Descending westward and breaking up into an assortment of cumulus and shower clouds which developed in the cooler air, it passes away as all storms must.

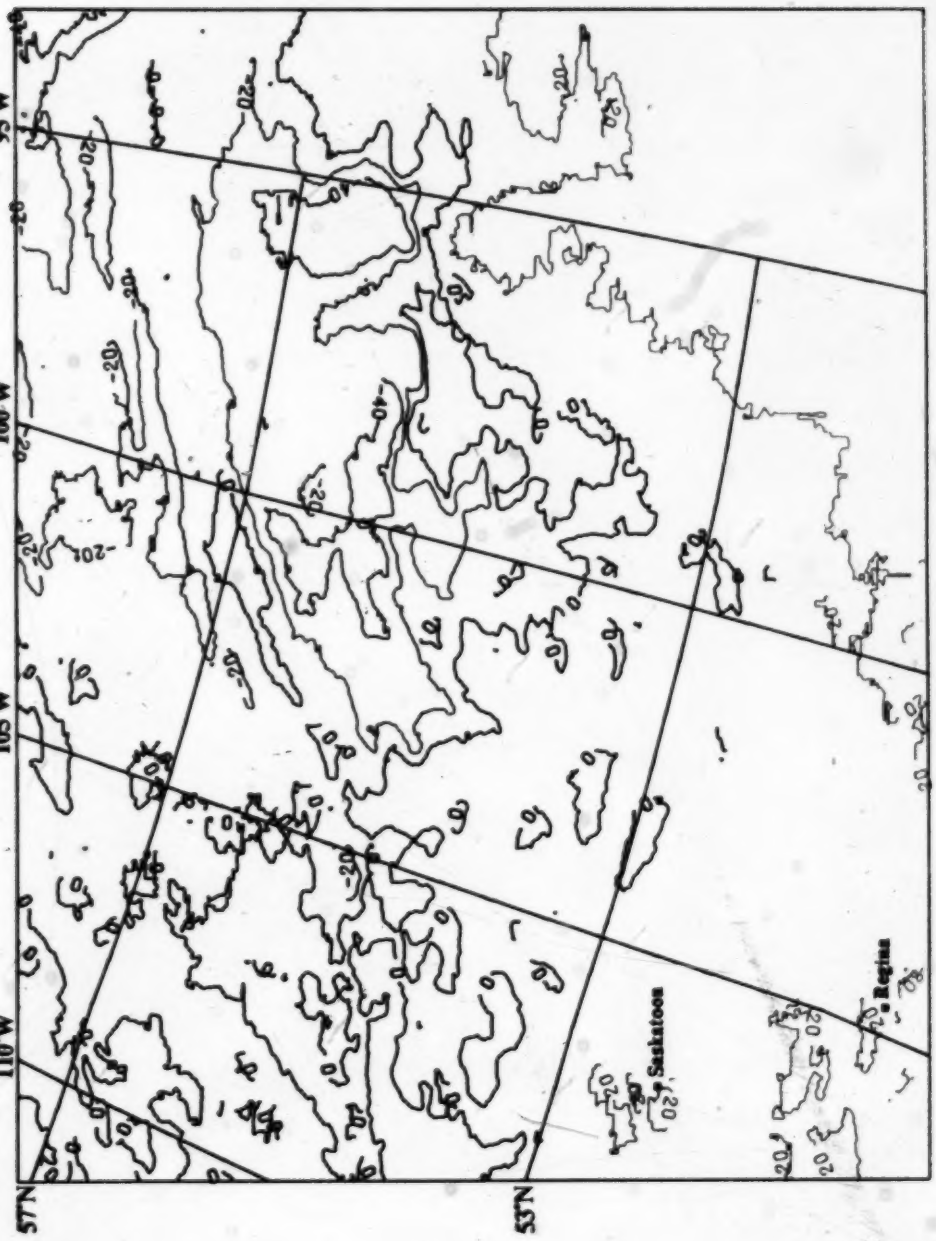

Figure 4.26 IR-derived isotherms for July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230, temperature (T) in °C, with isotherm interval 20°C.

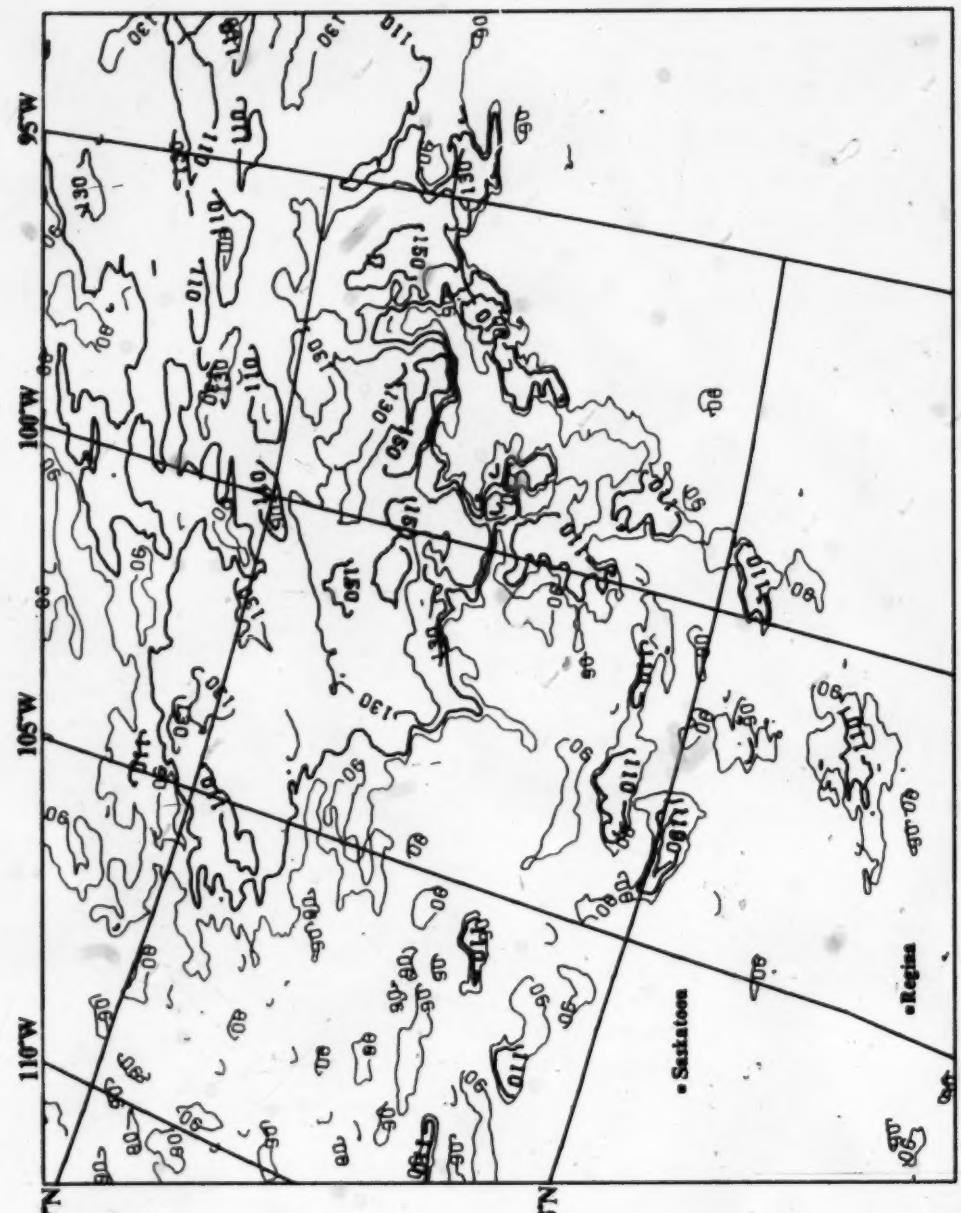

Figure 4.27 Brightness isopleths for July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230, isopleth interval 20 counts.

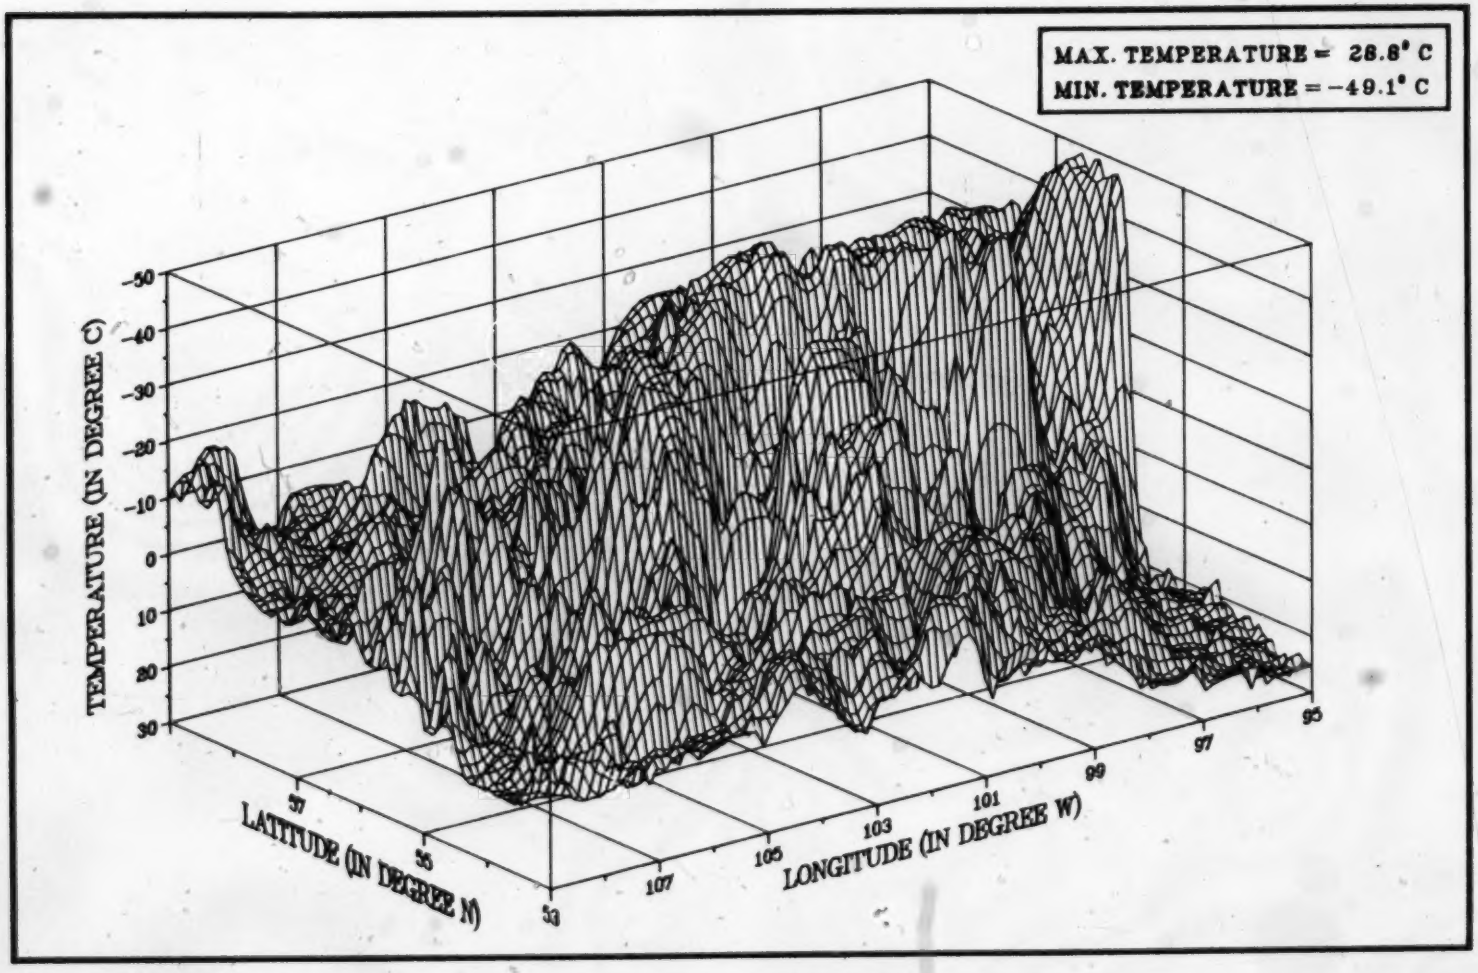

Figure 4.28 IR-derived 3 Dimensional temperature field of the cold-low area (53-59°N, 95-109°W) for July 18, 1986 at 2044-2059Z, NOAA-9 orbit 8230.

4.4 Radar History of the July Storm

Like most pictures, the series of radar scans presented in the next pages pretty well tell their own story. Only brief comments are therefore necessary, a few general remarks and short references to specific details. Moreover, some basic information on the radar system has been given already in Chapter 1 and Chapter 2.

For ease in comparison, all the images in the series have been scanned at elevation angles of 0.6°. Because of technical problems in producing hard copies of the CRT displays, some of the color values are not as pure as they should be, and some shift in color hues is noticeable as well.

It is also important to realize that the radar at Carvel was unable to sample the entire storm at maximum development, because of natural limits imposed on the range by topography, the distribution of the cloud and rain, the operating power and elevation angle of the radar beam, among others. Edson (ET) to the west and Vermillion (VG) to the east mark the practical working range for the July storm.

The intensity of the precipitation is displayed as follows:

L1	Yellow	<2.0 mm/hr
L2	Blue	2.0 - 4.9 "
L3	Off white	5.0 - 13.9 "
L4	Pink	14.0 - 39.9 "

The time of each scan is noted on the image and also in the figure caption.

The first series of four scans, Figures 4.29 to 4.32, show the precipitation area in the growth stage, at approximately half-hour intervals for the first three, and one hour between the third and fourth. The most interesting feature in this set is the generation of a new cell SW of VG, its growth and subsequent amalgamation with the main body of precipitation, the net effect being a substantial expansion of the rain area to eastern Alberta. The heaviest precipitation is generally falling from large cells to the south and west of the radar site.

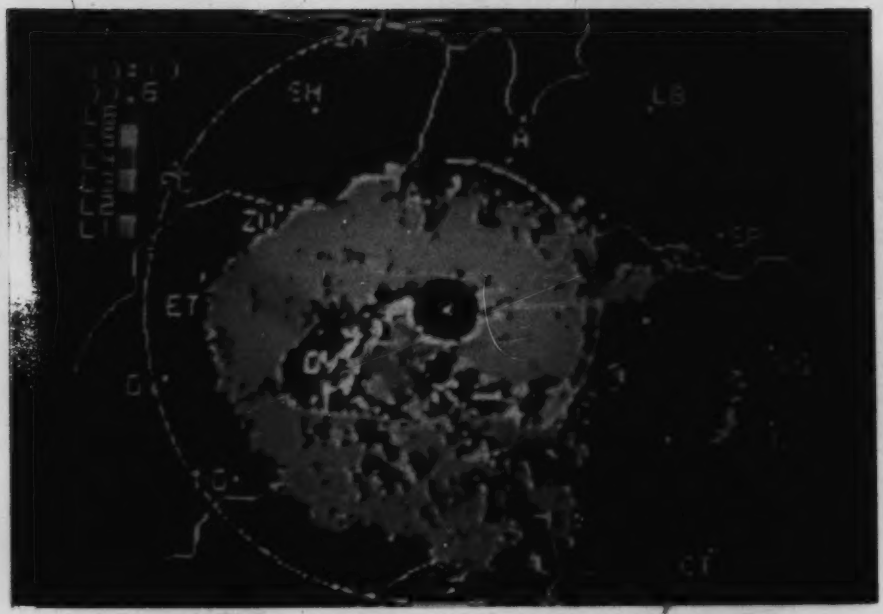

Figure 4.29 Radar scan of July 17, 1986, 1012Z (04:12 MDT) at elevation angle 0.6°.

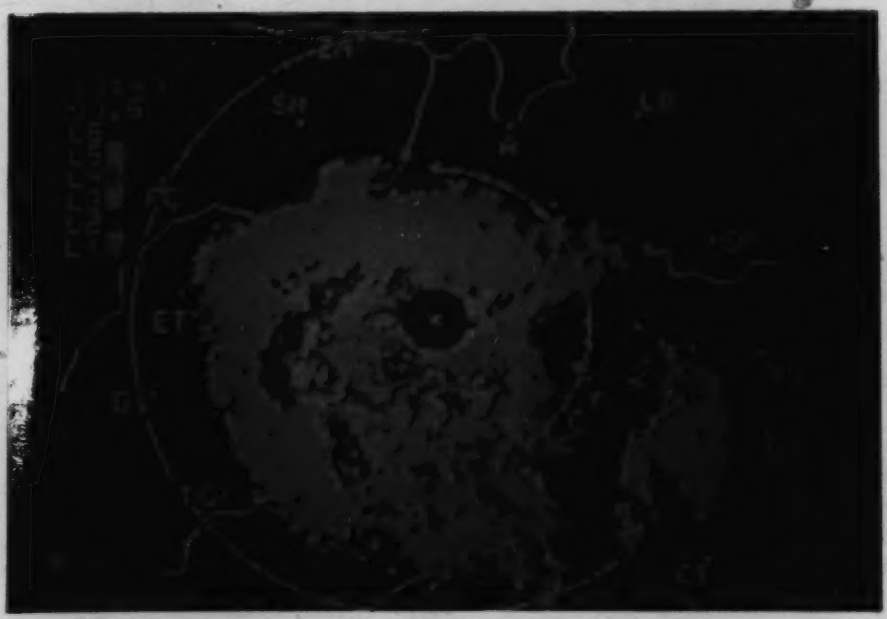

Figure 4.30 Radar scan of July 17, 1986, 1042Z (04:42 MDT) at elevation angle 0.6°.

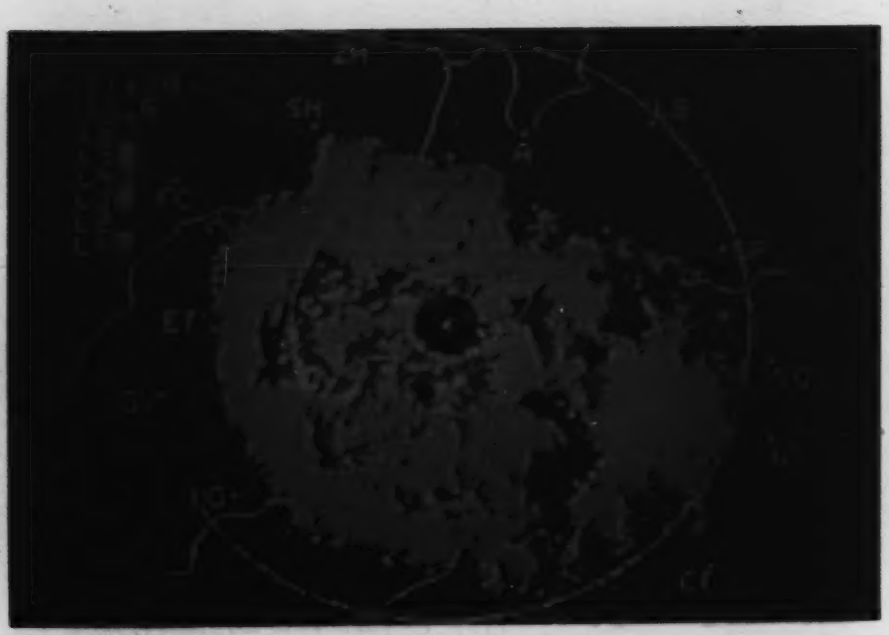

Figure 4.31 Radar scan of July 17, 1986, 1111Z (05:11 MDT) at elevation angle 0.6°.

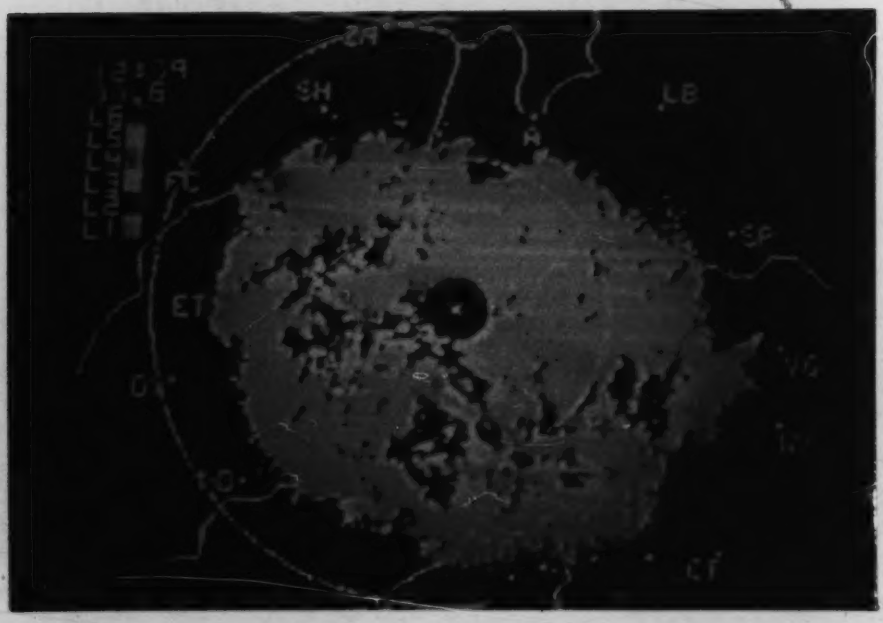

Figure 4.32 Radar scan of July 17, 1986, 1210Z (06:10 MDT) at elevation angle 0.6°.

The second set of six scans (Fig. 4.33 to Fig. 4.38) records the extent of the precipitation in the morning (7:11 - 11:36 MDT) when the low-pressure system was approaching Edmonton from the south. At this stage the storm had attained full maturity and the area affected by the storm had reached maximum size. There is precipitation falling in all quadrants beyond the range of detection of the beam at the elevation angles of 0.6°, as reported by weather stations outside the 200 km ring. The reason that the areas of intense (L4) precipitation are confined apparently to the inner 100 km circle is a consequence of the radar beam sampling the more distant clouds at elevations of 2 - 3 km above the ground, where the precipitation intensity is normally less.

Moderate to heavy rain was falling at Edmonton and the surrounding districts to the SW and SE throughout the period as the storm intensified.

The last print in this set (Fig. 4.38) records the stage when the deepening eye of the storm just passed Edmonton. The heavy rain band has shifted to the west of the radar site, and the precipitation area in the SE sector has developed a bulge, and is decreasing rapidly as the storm began to the accelerate and move eastward.

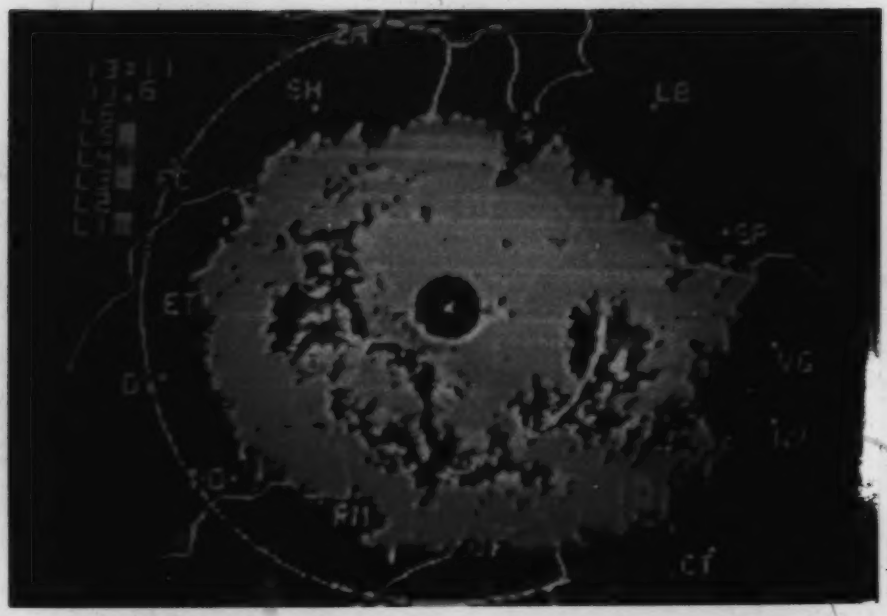

Figure 4.33 Radar scan of July 17, 1986, 1313Z (07:13 MDT) at elevation angle 0.6°.

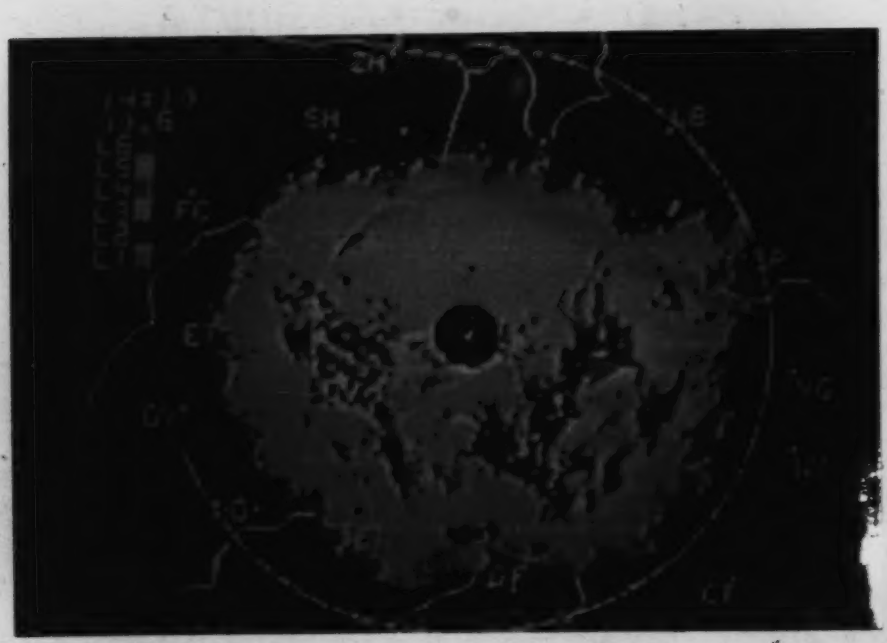

Figure 4.34 Radar scan of July 17, 1986, 1412Z (08:12 MDT) at elevation angle 0.6°.

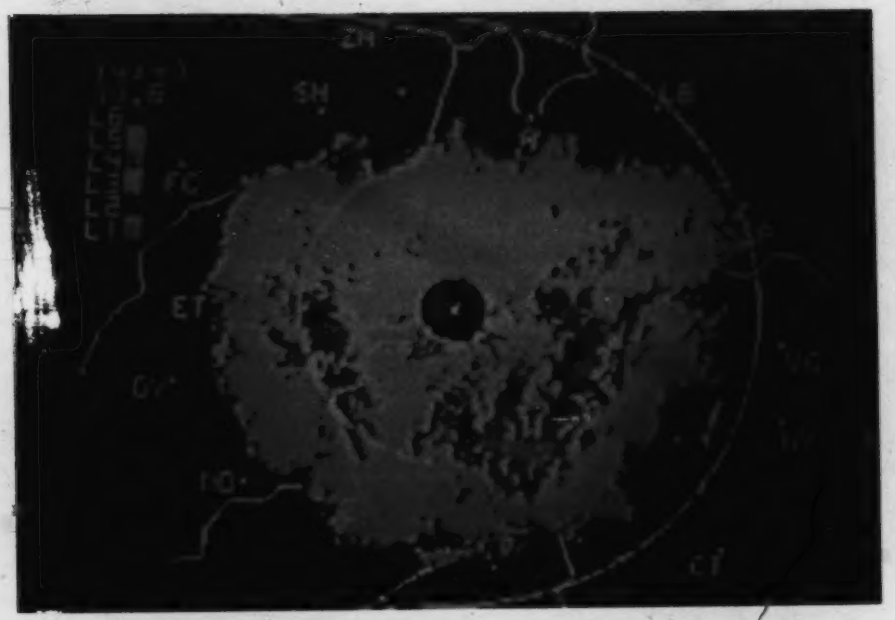

Figure 4.35 Radar scan of July 17, 1986, 1442Z (08:42 MDT) at elevation angle 0.6°.

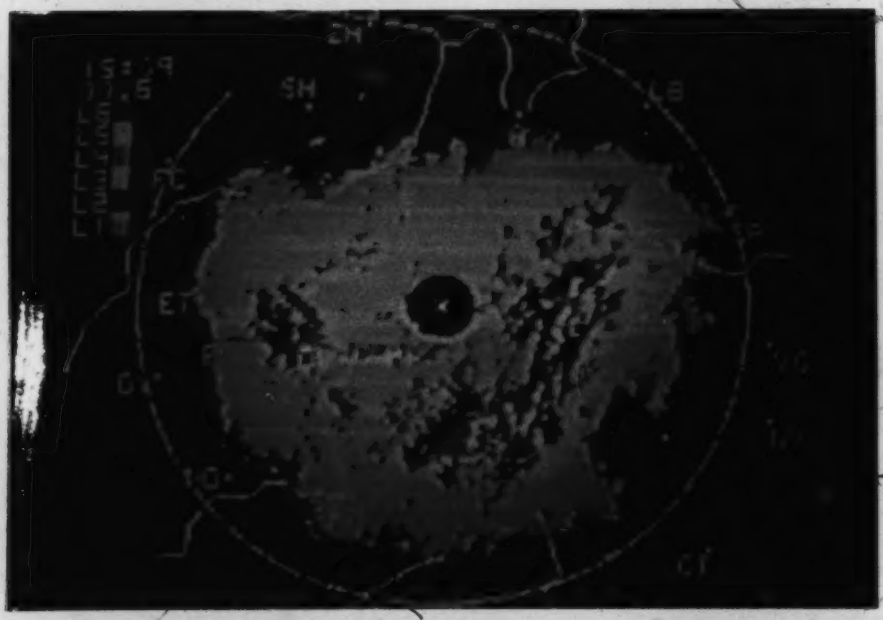

Figure 4.36 Radar scan of July 17, 1986, 1512Z (09:12 MDT) at elevation angle 0.6°.

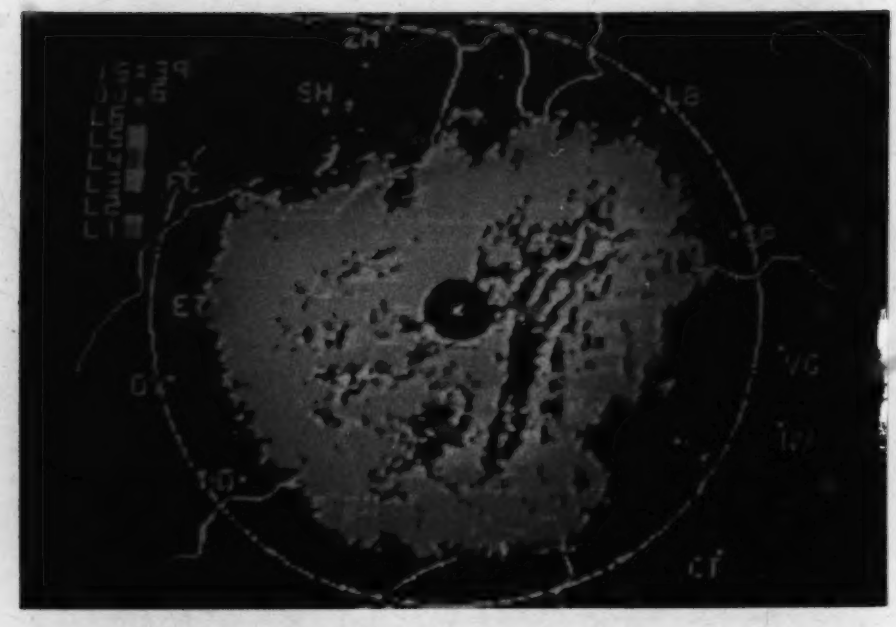

Figure 4.37 Radar scan of July 17, 1986, 1541Z (09:41 MDT) at elevation angle 0.6°.

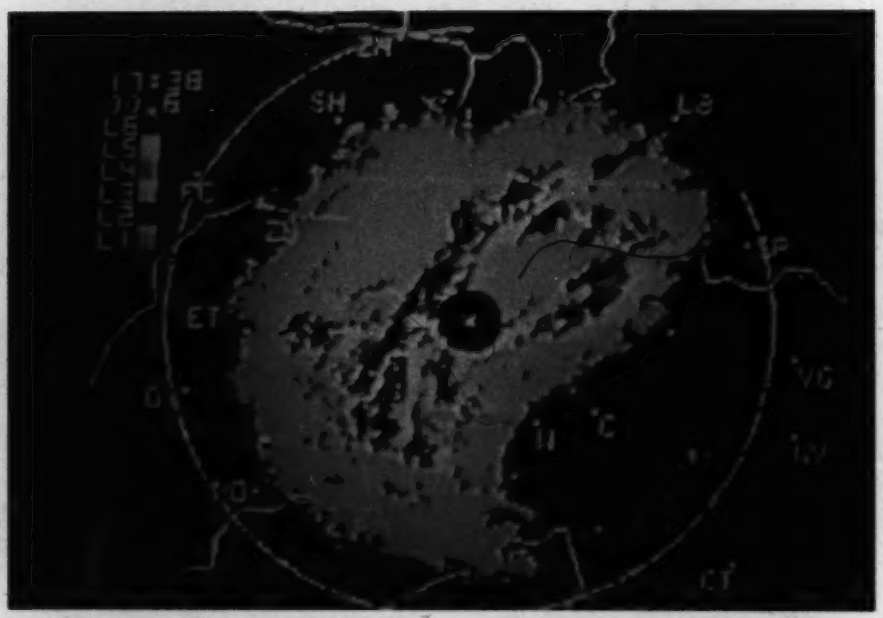

Figure 4.38 Radar scan of July 17, 1986, 1740Z (11:40 MDT) at elevation angle 0.6°.

The last set of scans, Figs. 4.39 to 4.42, close in time to the 2200Z afternoon satellite pass, (Figs. 4.4 and 4.5) provide a record of the weakening and breakup of the storm system. Two major rain bands slowly dissolve into separate cells. The breakup proceeds from east to west, in the direction opposite to the motion of the storm. This is as it should be, because the warm, humid air circulation to the north of the cold core is from the east, resulting in continuous upslope flow west of the Edmonton, as well as on the higher ground to the north and south. The details of this mechanism will be described in the synthesis of Chapter 5.

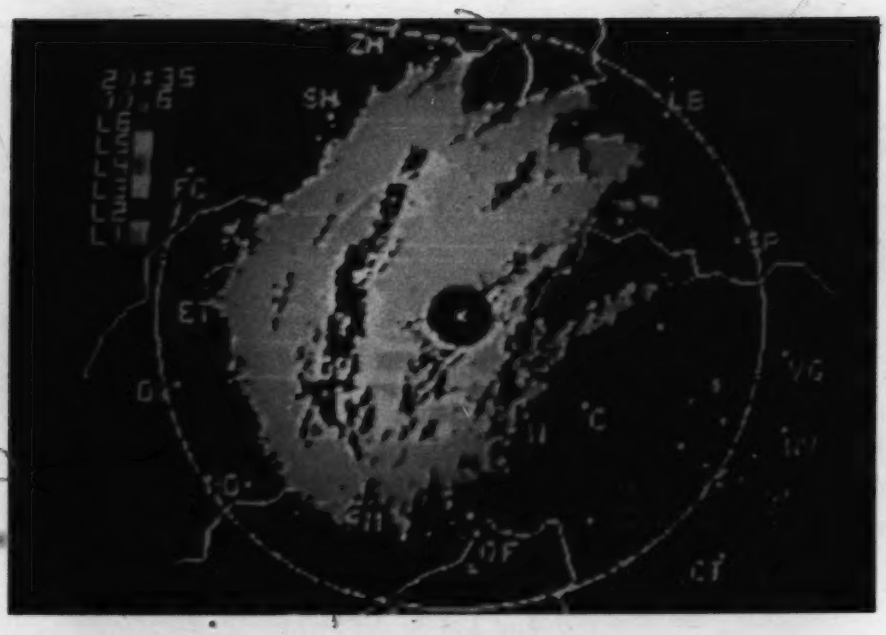

Figure 4.39 Radar scan of July 17, 1986, 2037Z (14:37 MDT) at elevation angle 0.6°.

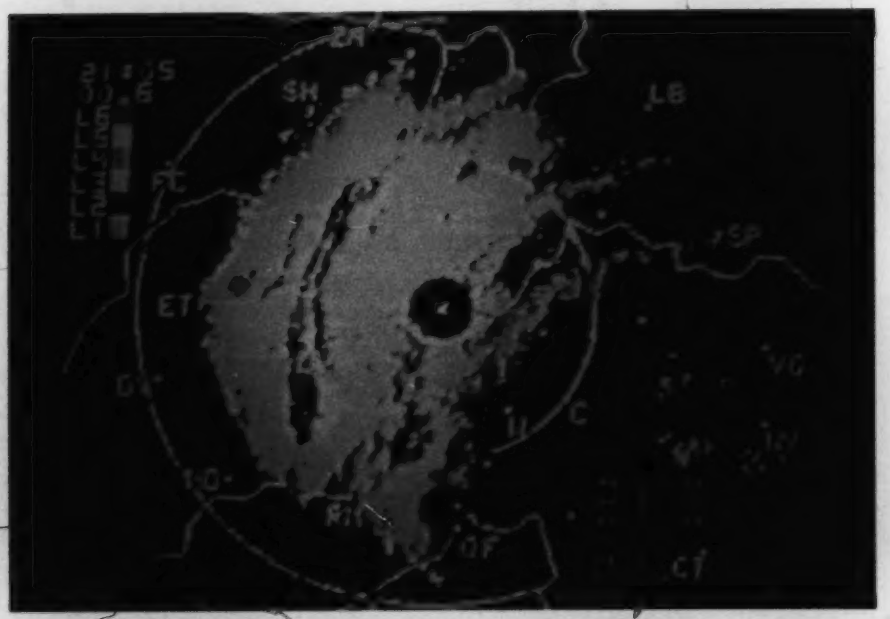

Figure 4.40 Radar scan of July 17, 1986, 2107Z (15:07 MDT) at elevation angle 0.6°.

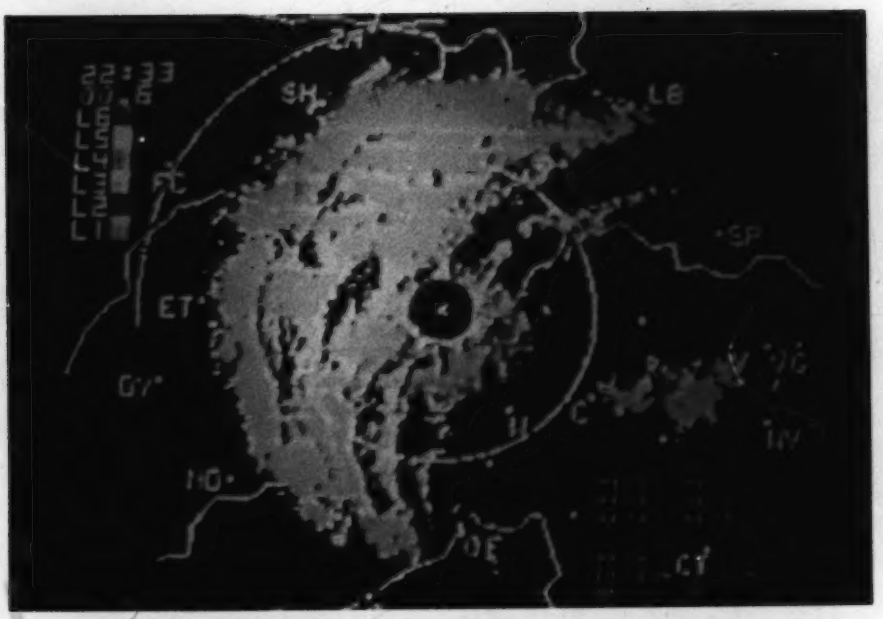

Figure 4.41 Radar scan of July 17, 1986, 2236Z (16:36 MDT) at elevation angle 0.6°.

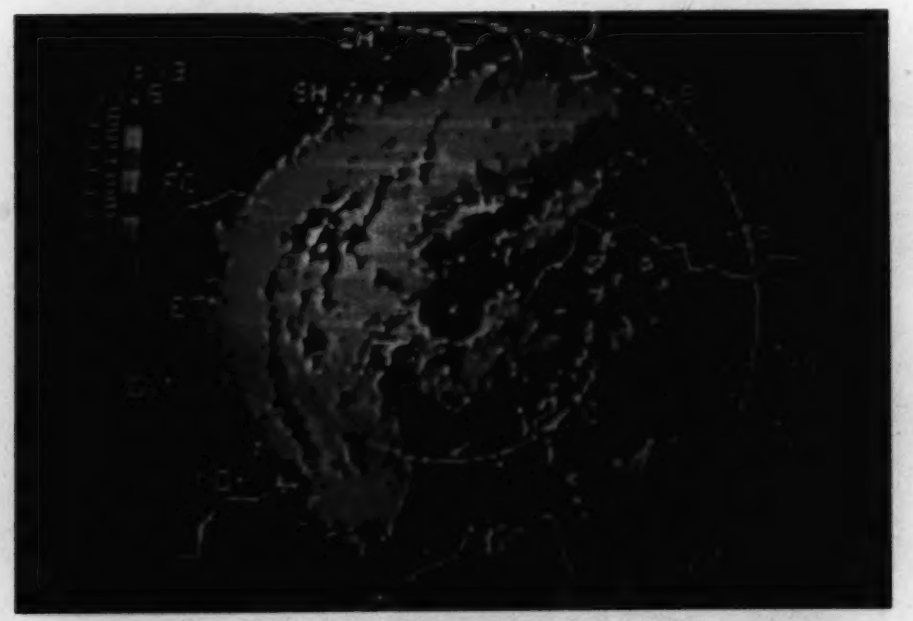

Figure 4.42 Radar scan of July 18, 1986, 0004Z (18:04 MDT) at elevation angle 0.6°.

5. DISCUSSION AND SYNTHESIS

Though always interesting to the meteorologist, neither the May nor the July storms were exceptional as Alberta storms go. That both are nevertheless noteworthy is due to the fact that, by coming at the "wrong" time, they caused considerable hardship and heavy financial losses to many people. Both produced copious amounts of rain and snow, but not in quantities that set new records, except at a few forestry stations in the foothills which were buried in snow e.g. 75 cm at Grave Flats (elevation 2074 m ASL) during the July storm, and 3-metre deep snow drifts in southwestern Alberta in May (Paruk 1986, 1987). Reference should be made to the tables of storm precipitation and the isohyet plots of Chapter 2 for most of the details.

Any substantial snowfall in May will cause problems for most people. Farmers with seeding completed may welcome the extra moisture, but ranchers at calving time will not, and neither will motorists, gardeners and fruit growers. Heavy, wet snows in the spring always cause much more damage, especially to gardens, trees and power lines, than equal amounts of dry snow in winter. On the other hand, rains in the growing season usually come at the right time for most, and only at the wrong time for holidayers looking for Sun.

Why then did the 1986 July storm come at the wrong time? Because the first two weeks were quite wet throughout West-Central Alberta, to the point that the ground was already saturated, the catchments and storage basins full, and the rivers high, when the storm struck and dumped the extra water masses which could not be stored, and then caused wide-spread flooding of the North Saskatchewan, The Athabasca, The Red Deer, and several other rivers.

On the synoptic scale, and as an important contributor to the climate of Alberta, the function of a cold low is twofold: generating a deep, easterly circulation of moist air north of its centre, and increasing the instability of the atmosphere by moving cold air aloft over the warm surface air. Without cold lows, the principal agents of wide-spread rains on the

Western Prairie, Alberta would be much drier than it is, and climatologically an arid region. It is fortunate that the heavy precipitation usually comes when it is most needed: in the early stages of the growing season of June and July.

Though similar in action and members of the same class of weather systems, every cold low is unique, and therefore difficult to predict with confidence. Migrant pools of cold air aloft (≃500 mb) from the North Pacific, they behave erratically on reaching and moving over land, as the tracks of the two lows plotted in Figures 2.2 and 2.4 clearly show. They have, in a sense, lives of their own: temporarily cut off from the main stream long-wave pattern, they are independent, rotating cores of cold air with relatively long life spans (5 - 10 days). This is a consequence of their sense of rotation, which is cyclonic, a necessary condition if such cores are to survive for more than a day or two. Rotating as they do, they carry with them a large amount of cyclonic vorticity, usually concentrated in well-defined vorticity centres. Positive vorticity advection normally occurs to the east of such centres, which makes them favourable locations for the generation of surface lows.

Both of the cold-low systems analysed in the previous chapters possessed these characteristics, but yet they differed considerally in their development to the mature stage. It may have been noted that, while cold-core tracks were plotted for both storms (Figs. 2.2 and 2.4) and the track of the surface centre of the May storm was plotted as well (Fig. 2.3) no track chart was prepared for the July storm. The reason for the missing chart is simple: there was nothing comparable to plot, because there was no pre-existing surface low as in the May storm. Only later, after the cold core had generated its own surface low could there be a track, two sections of which have been plotted on the surface maps of Figs.4.14 and 4.15.

Both cold lows are similar in that they produced surface lows by the process of lee cyclogenesis, and developed into major storms. But the May storm was in essence a redevelopment of an old Pacific storm, whereas the July storm was a local development without an antecedent surface low.

Having presented many pages of evidence, what may one deduce from them as to the root cause, the principal mechanism responsible for the heavy precipitation?

Any appreciable amount of wide-spread precipitation (as distinct from local convective showers) requires the presence of a moist ascending air mass in a synoptic-scale flow. In Alberta, any circulation from the northeasterly quadrant will potentially lead to an upslope condition, as the air mass is forced to move over the increasingly higher ground to the west. This is a frequent occurrence with shallow flows close to the surface, which usually results in the formation of relatively thin layers of cloud (such as St and Sc) in the foothills and, over gently-sloping terrain as well.

A cold low and its associated surface low, once formed, also produce upslope conditions in the easterly circulation to the north of the centre, but on a much larger scale and throughout a much thicker layer, a process that Reinelt (1970) has called "deep upslope". Such circulations, when continuing over a period of several hours, will lift moist air to saturation and so result in the formation of cloud. Continuing for a day or more, this process will produce an extensive and very thick layer of cloud, which in time will become convectively unstable as the heat of condensation is added to the ascending air. In the end, a major storm will cover a wide area with continous precipitation, interrupted by periods of heavy dowpours as bands and cells of embedded thunderhead Cbs sweep across the land.

Bibliography

Anderson, R.K. and N.F. Veltishchev (ed.), 1973: *The Use of Satellite Picture in Weather Analysis and Forecasting.* WMO Tech. Note No. 124, Geneva, 275 pp.

Anderson, R.K., 1978: *Current Uses of Satellite Data in a Meteorological Forecast Office.* Reprinted from the WMO Bull., April 1978.

Barnes J.C and M.D. Smallwood, 1982: *TIROS-N Series Direct Readout Users Guide.* Report under Contract No. 03-8-A01-78-4312, U.S Dept. of Commerce. NOAA/NESS, Washington, D.C.

Barrett, E.C. and D.W. Martin, 1981: *The Use of Satellite Data in Rainfall Monitoring.* Academic Press, N.Y., 340 pp.

Battan, L.J. and R.R. Braham, 1956: *A Study of Convective Precipitation based on Cloud and Radar Observation.* J. Meteor., **13**, 587-591.

Battan, L.J., 1973: *Radar Observation of the Atmosphere.* The Univ. of Chicago Press, Chicago, 324 pp.

Bendell, J. F., 1985: *Radar Reference Manual.* Weather Services, Training Unit, Meteor. Training Centre, Transport Canada Training Institute, Ontario, A1-B15.

Hage, K.D., 1961: *On Summer Cyclogenesis in the Lee of the Rocky Moutains.* Bull. Amer. Meteor. Soc., **42**, 20-33.

Haugen, D.A. and R.C. Lipschutz, 1982: *A Verification Program for Severe Convective Storm Forecasts.* 9th Conf. on Weather Forecasting and Analysis, June 28 - July 1, 1982, Seattle, WA., Amer. Meteor. Soc., Boston, Mass., 102-104.

Holton, J.R., 1979: *An Introduction to Dynamic Meteorology.* 2nd Edition, Academic Press, N.Y., 391 pp.

Jager, G., 1982: *Satellite Indicators of Rapid Cyclogenesis.* Marines Log Weather, **28**, No.1, 1-6.

Johnson, R.H. and J.J. Toth, 1982: *Topographic Effects and Weather Forecasting in the Colorado Profs Mesonetwork Area.* 9th Conf. on Weather Forecasting and Analysis, June 28 - July 1, 1982, Seattle, WA., Amer. Meteor. Soc., Boston, Mass., 440-445.

Kelly, F.P. and T.H.V. Harr, 1985: *Convective Cloud Climatologies Constructed from Satellite Imagery.* Mon. Wea. Rev., **113**, 326-337.

Lauritson, L., G.J. Nelson and F.W. Porto, 1979: *Data Extraction and Calibration of TIROS-N/NOAA Radiometers.* NOAA Tech. Mem. NESS 107, 58 pp.

Leese, J.A., A.L. Booth and F.A. Godshall, 1970: *Archiving Climatological Application of Meteorological Satellite Data.* ESSA Tech. report NESC 53.

Martin, D.W. and W.D. Scherer, 1973: *Review of Satellite Rainfall Estimation Methods.* Bull. Amer. Meteor. Soc., **60**, 661-673.

Oard, M.J., 1984: *Forecasting Spring Storms in Montana.* 10th Conf. on Weather Forecasting and Analysis, June 25-29, 1984, Clearwater Beach, Fla., Amer. Meteor. Soc., Boston, Mass., 434-439.

Oliver, V.J and F.C. Parmenter, 1973: *Weather Forecasting with the Aid of Satellite Data.* Preprint 9th Annual meeting of the Amer. Inst. of Aeronautics and Astrophysics, Jan. 8-10, 1973, Washington, D.C., 7 pp.

Paegle, J., 1984: *Topographically Induced Low Level Jets.* 3rd Conf. on Mountain Meteorology, Oct. 16-19, 1984, Portland, Ore., Amer. Meteor. Soc., Boston, Mass., 85-88.

Palmen, E. and C.W. Newton, 1969: *Atmospheric Circulation Systems.* Academic Press, 603 pp.

Paruk, B.J., 1986: *Spring Snowstorm May 13-15th, 1986.* Scientific Services Division, A.E.S. Western Region, 12 pp.

Paruk, B.J., 1987: *The Hydrometeorological Events of the July 16 to 18, 1986 Storm.* Scientific Services Division, A.E.S. Western Region. 16 pp.

Petterssen, S., 1956: *Weather Analysis and Forecasting.* 2nd Edition, Vol. I, McGraw-Hill, N.Y., 428 pp.

Pierrehumbert, R.T., 1984: *Mechanisms of Circulation Change during Lee cyclogenesis.* 3rd Conf. on Mountain Meteorology, Oct. 16-19, 1984, Portland, Ore., Amer. Meteor. Soc., Boston, Mass., 100-101.

Purdom, J.F.W, R.N. Green and H.A. Parker, 1982: *Integration of Satellite and Radar Data for Short Range Forecasting and Storm Diagnostic Studies.* 9th Conf. on Weather Forecasting and Analysis, June 28 - July 1, 1982, Seattle, WA., Amer. Meteor. Soc., Boston, Mass., 51-55.

Reinelt, E.R., P. Hof, D. Oracheski and J. Broszkowski, 1975: *Research Data for Application to Arctic Weather and Ice Prediction.* Final Report. DDS(AES) contract 0SV4-0183, Univ. of Alberta, Edmonton, 204 pp.

Reinelt, E.R., 1970: *On The Role of Orography in the Precipitation Regime of Alberta.* The Alberta Geographer, No 6, 1970, 45-58.

Rogers, R.R., 1979: *A Short Course in Cloud Physics.* 2nd Edition, Vol. I, Oxford, Pergamon Press, 235 pp.

Schwalb, A., 1978: *The TIROS-N/NOAA A-G Satellite Series* . NOAA Tech. Mem. NESS 95, 75 pp.

Schwalb, A., 1982: *Modified Version of The TIROS N/NOAA A-G Satellite Series (NOAA E-J) - Advanced TIROS N (ATN).* NOAA Tech. Mem. NESS 116, 23pp.

Scofield, R.A. and L. Spayd, 1983: *A Technique that Uses Satellite, Radar and Conventional Data for Analysing Precipitation from Extratropical Cyclones.* 5th Conf. on Hydrometeorology, Oct. 17-19, 1983, Tulsa, Okla., Amer. Meteor. Soc., Boston, Mass., 259-267.

Smith, P.L. and R.R. Rogers, 1970: *Weather Radar.* Unpublished manuscript, Alberta Research Council, Edmonton, Alberta, 430 pp.

Spayd, L.E. and R.A. Scofield, 1984: *An Experimental Satellite-derived Heavy Rainfal Short-range Forecasting Technique.* 10th Conf. on Weather Forecasting and Analysis, June 25-29, 1984, Clearwater Beach, Fla., Amer. Meteor. Soc., Boston, Mass., 400-408.

Tsui, T.L. and L.R. Brody, 1982: *Objective Storm Tracking System.* 9th Conf. on Weather Forecasting and Analysis, June 28 - July 1, 1982, Seattle, WA., Amer. Meteor. Soc., Boston, Mass., 289-295.

Weber, E.M. and S. Wilderotter, 1981: *Satellite Interpretation.* Tech. Note 3WW/TN-81/001.

Wieler, J., 1981: *The application of Satellite and Radar Data in Thunderstorm Research.* MSc. Thesis, Univ. of Alberta, Edmonton, 125 pp.

APPENDIX A

Infrared Calibration Technique.

Assume that the output of each channel (in counts) is a linear function of the sensed radiance. Then, the relationship between counts and radiances is:

$$N = GX + I$$

where N is the radiance of the target at count value X,

G and I are channel gain and channel intercept, respectively.

The channel gain is calculated by :

$$G = \frac{N_{sp} - N_t}{X_{sp} - X_t}$$

The channel intercept is calculated by:

$$I = N_{sp} - G * X_{sp}$$

where G is the channel gain in radiance per unit count,

N_{sp}, N_t are the radiances of space and of the internal target, respectively.

X_{sp} and X_t are the mean output count values, when the radiometer views space, and the internal target, respectively.

In reality, the response of the channel in the 11 μm region is slightly non-linear due to the physical properties of the detectors employed in this channel. The coefficient of the radiance of space can be found in Appendix B.

The Planck function is then integrated with the spectral response function of the radiometer and evaluated every two degree intervals in the range 200°K-300°K. This process gives a digital count value for each temperature. The temperature of each pixel is then found by a linear interpolation on the temperature versus digital count.

APPENDIX B

THE NOAA-9 Coefficients.

1. Platium Resistance Thermometers (PRTs).

a_{ij} - coefficients to convert PRT counts to temperature (K).

PRT	a_0	a_1	a_2	a_3	a_4
1	277.018	0.05128	0.0	0.0	0.0
2	276.750	0.05128	0.0	0.0	0.0
3	276.862	0.05128	0.0	0.0	0.0
4	276.546	0.05128	0.0	0.0	0.0

2. Radiance of Space.

N_{sp} is the radiance of space including non-linearity correction

Channel	N_{sp} (mW/srM^{2}cm^{-1})
3	0.0
4	-3.384
5	-2.313

3. AVHRR/1 Channel 4.

The value of ν (wave number), $\Delta\nu$ and 60 values of normalized response function ϕ for NOAA-9 used to determining the black body radiance are:

ν = 862.06885 cm^{-1} $\Delta\nu$ = 2.37812

0.0	0.30603E-4	0.64563E-4	0.10523E-3	0.17057E-3
0.37139E-3	0.85488E-3	0.17526E-2	0.29947E-2	0.43718E-2
0.56739E-2	0.67844E-2	0.77153E-2	0.84881E-2	0.91222E-2
0.96298E-2	0.10022E-1	0.10310E-1	0.10525E-1	0.10708E-1
0.10903E-1	0.11130E-1	0.11370E-1	0.11596E-1	0.11786E-1
0.11949E-1	0.12111E-1	0.12299E-1	0.12523E-1	0.12746E-1
0.12926E-1	0.13022E-1	0.13039E-1	0.13030E-1	0.13047E-1
0.13135E-1	0.13274E-1	0.13419E-1	0.13522E-1	0.13518E-1
0.13274E-1	0.12640E-1	0.11466E-1	0.97239E-2	0.76698E-2
0.56031E-2	0.38225E-2	0.25039E-2	0.15835E-2	0.97002E-3
0.57192E-3	0.31626E-3	0.16604E-3	0.88422E-4	0.50625E-4
0.27594E-4	0.13455E-4	0.52455E-5	0.53119E-9	0.0

APPENDIX C

COMPUTER PROGRAMS

```
1     ********** FILE READTAPE **********
2     $EMPTY -READ OK
3     $R *FORTG SPUNCH=-READ T=1
4     C
5     C     PROGRAM FOR IDENTIFYING SATELLITE SCAN INFORMATION AND
6     C     CONVERTING MAG TAPE INFORMATION TO COMPUTER USEABLE FORM
7     C     INPUT DATA IS FORMAT FREE, DIVIDED BY COMMAS
8     C
9     C INPUT UNIT  1 = RAW TAPE DATA IN ONE BYTE INTEGER FORM.
10    C             5 = PROGRAM PARAMETERS.
11    C OUTPUT UNIT 3 = RAW TAPE DATA IN ONE BYTE INTEGER FORM
12    C             6 = TAPE DOCUMENTATION, TAPE DATA IN INTEGER FORM.
13    C             7 = TELEMETRY WEDGE LEVELS. (IF KOUT = 3)
14    C               = ONE SCAN DATA OF NOAA-9 APT (IF KOUT = 6)
15    C*************************************************************************
16    C
17          REAL*8 IROV(2)
18          INTEGER BPS, SPB, NX(10)
19          INTEGER*2 IA(4096), LREV /5/, LFWD /3/
20          INTEGER*2 LEN, ISC(64), LL(18), DOC(52), NSC(12), ID(2512)
21          INTEGER*4 LRN
22          EQUIVALENCE (IA(1),DTXT,FL,LA)
23          LOGICAL*1 FREE(1) /'*'/, FL(18), DTXT(52), LA(8192)
24          DATA YES1/'Y'/
25    C
26          DATA IROV/8HINFRARED, 8H VISIBLE/
27          DATA ISC/1H  ,1H!,1H",1H#,1H$,1H%,1H&,1H',1H(,1H),1H*,1H+,
28         & 1H,,1H-,1H.,1H/,1H0,1H1,1H2,1H3,1H4,1H5,1H6,1H7,1H8,1H9,1H:,
29         & 1H;,1H.,1H=,1H>,1H?,1H@,1HA,1HB,1HC,1HD,1HE,1HF,1HG,1HH,1HI,
30         & 1HJ,1HK,1HL,1HM,1HN,1HO,1HP,1HQ,1HR,1HS,1HT,1HU,1HV,1HW,1HX,
31         & 1HY,1HZ,  1H(,1H/,1H),1H|,1H_/
32          CALL FTNCMD('ASSIGN 5=*SOURCE*', 17)
33          CALL DESTRY('-3 ')
34          CALL DESTRY('-6 ')
35          CALL DESTRY('-7 ')
36          CALL SETLIO('3       ','-3 ')
37          CALL SETLIO('6       ','-6 ')
38          CALL SETLIO('7       ','-7 ')
39    C
40          WRITE (5,10)
41       10 FORMAT (1X, 'IS THIS MAG FILE ? (Y/N) :')
42          READ (5,20) ANS1
43       20 FORMAT (A4)
44          WRITE (5,70)
45       70 FORMAT (1X,'INPUT NORBIT,ITYPE(IR=1,VIS=2),NFS,NBS,NBR,KOUT:')
46          READ (5,FREE) NORBIT, ITYPE, NFS, NBS, NBR, KOUT
47          WRITE (6,80) NORBIT, IROV(ITYPE)
48       80 FORMAT ('***** FILE ',I5,1X, A8, ' *****')
49    C
50    C       NFS  = NUMBER OF FILES TO BE SKIPPED
51    C       NBS  = NUMBER OF BLOCKS TO BE SKIPPED
52    C       NBR  = NUMBER OF BLOCKS TO BE READ AND OUTPUTTED
53    C       KOUT = 3 OUTPUTS UNFORMATTED BLOCKS TO UNIT 3
54    C                (FILE OR MAG TAPE FOR USE IN PROGRAM SCAN).
55    C            = 6 OUTPUTS FORMATTED BLOCKS TO UNIT 6
56    C
57    C  FOR UNIT 3 OUTPUT ONLY:
58    C      ITYPE = 1 OUTPUTS INFRARED DATA (THE TELEMETRY DATA IS
59    C                OUTPUTTED TO UNIT 7 WITH OPTIONAL CALIBRATION)
60    C            = 2 OUTPUTS VISIBLE DATA (NO CALIBRATION REQUIRED)
61    C
62          WRITE (6,90)
63       90 FORMAT ('1', 10X, 'INPUT PARAMETERS')
```

```
64          WRITE (6,100) NFS, NBS, NBR, KOUT
65        100 FORMAT ('0', 4X,'FILES SKIPPED =',I3, 4X, 'BLOCKS SKIPPED =',
66           &       I3, 4X, 'BLOCKS READ=', I4, 4X, 'OUTPUT OPTION =', I2)
67          IF (KOUT .EQ. 6) GO TO 120
68      C
69      C UNIT 3 : THERE ARE 800 SAMPLES PER CHANNEL(IR&VIS)
70      C
71          IF (ITYPE .EQ. 2) GO TO 108
72          IBGN = 0
73          WRITE (7,81) NORBIT
74           81 FORMAT ('***** FILE',I5,'.TELEM *****')
75          GO TO 109
76      C
77        108 IBGN = 800
78        109 WRITE (6,110) IROV(ITYPE)
79        110 FORMAT ('0', 4X, A8, ' INFORMATION TRANSFERRED TO UNIT 3')
80          GO TO 127
81        120 WRITE (7,125) NORBIT
82        125 FORMAT ('***** ONE SCAN DATA OF NOAA-9 APT ORBIT',I5,' *****')
83        127 IF (ANS1 .EQ. YES1)REWIND 1
84      C
85      C SKIP TO FILE
86      C
87          CALL SKIP(NFS, 0, 1, &480)
88      C
89      C READ AND INTERPRET FILE LABEL
90      C FILE IS IN ASCII, 1ST LOOP CONVERT TO EBCDIC CHARACTERS
91      C 2ND LOOP CONVERT 4 DIGITS TO BINARY NUMBER.
92      C NOTE .... DIGITS ARE IN 8 LEFTMOST BITS OF INTEGER*2 VALUE
93      C           SO MUST DIVIDE BY 256 TO MOVE TO 8 RIGHTMOST BITS.
94      C
95      C       LEN = LENGTH OF ANY BLOCK
96      C       LRN = INTERNAL COUNTER FOR DATA INPUT
97      C
98        130 CALL READ(FL, LEN, 0, LRN, 1, &190)
99      C
100         DO 140 L = 1, LEN
101           ID(L) = IBYTE(FL(L))
102           INDEX = ID(L) - 31
103           IF (INDEX .LT. 1) INDEX = 1
104           IF (INDEX .GT. 64) INDEX = 1
105           LL(L) = ISC(INDEX)
106       140 CONTINUE
107     C
108         IF (ANS1 .NE. YES1) GO TO 170
109         NPASS=0
110         DO 145 L = 1, 4
111           INDEX = L + 1
112           IF (MOD(L,2) .EQ. 0) INDEX = L - 1
113           INDEX = (LL(INDEX) - ISC(17))/256
114           IF (INDEX .GE. 0 .AND. INDEX .LE. 9) NPASS= 10*NPASS + INDEX
115       145 CONTINUE
116     C
117     C PROGRAM CHECKS FOR CORRECT PASS NUMBER.
118     C PROGRAM WILL SEARCH TAPE UNTIL IT IS FOUND
119     C
120         WRITE(5,FREE) NPASS
121         IF (NPASS - NORBIT) 160, 170, 150
122       150 CALL CNTRL('BSF 2', LREV, 1, RET)
123       160 CALL CNTRL('FSF', LFWD, 1, RET)
124         GO TO 130
125       170 WRITE (6,180)(LL(K),K=1,4),LL(2),LL(1),LL(4),LL(3),LEN, LRN
126       180 FORMAT ('0', 4X, 'FILE LABEL=', 4A1, 4X, 'ORBIT ', 4A1, 4X,
127          &       'LENGTH=', I3, 4X, 'LRN=', I5)
128     C
129     C READ AND INTERPRET FILE DOCUMENTATION
130     C
131       210 CALL READ(DTXT, LEN, 0, LRN, 1, &250)
132     C
133     C       ID(J) = OUTPUT IN INTEGER FORM (UNIT 6)
134     C       SPB = NUMBER OF SCANS PER DATA BLOCK
135     C       BPS = NUMBER OF BYTES PER SCAN
136     C
```

```
137           ID(1) = JBYTE(DTXT(1))
138           ID(2) = IBYTE(DTXT(2))
139           ID(3) = JBYTE(DTXT(3))
140           ID(4) = IBYTE(DTXT(4))
141           BPS = ID(1) + ID(2)
142           SPB = ID(3) + ID(4)
143     C
144           DO 220 L = 5, LEN
145             ID(L) = IBYTE(DTXT(L))
146             INDEX = ID(L) - 31
147             IF (INDEX .LT. 1) INDEX = 1
148             IF (INDEX .GT. 64) INDEX = 1
149             DOC(L) = ISC(INDEX)
150         220 CONTINUE
151           WRITE (6,230) (DOC(K),K=5,LEN), LEN, LRN
152         230 FORMAT ('0', 4X, 'DOCUMENTATION:', 48A1, 4X, 'LENGTH=', I3,
153            &        4X, 'LRN=', I5)
154           WRITE (6,240) BPS, SPB
155         240 FORMAT ('0', 4X, I5,' BYTES PER SCAN',4X,I2,' SCAN PER BLOCK')
156     C
157     C       LDR = LENGTH OF DATA RECORD (ONE SCAN)
158     C             (BPS BYTES PLUS TWO BYTES CONTAINING SCAN NUMBER)
159     C       LDB = LENGTH OF DATA BLOCK (SPB SCANS)
160     C
161           LDR = BPS + 2
162           LDB = SPB * LDR
163           NS = LDR / 2
164           GO TO 270
165     C
166         250 WRITE (6,260)
167         260 FORMAT ('0', 4X, '*** ERROR IN DOCUMENTATION INPUT ***')
168     C
169     C SKIP NBS BLOCKS OF DATA
170     C
171         270 CALL SKIP(0, NBS, 1, &540)
172           ISCAN = SPB * NBS
173           MINSC = ISCAN
174           NSOUT = 0
175     C
176     C READ AND CONVERT NBR BLOCKS OF DATA
177     C           NSOUT = NUMBER OF SCANS OUTPUTTED
178     C
179           DO 440 KK = 1, NBR
180             NBCNT = NBS + KK
181     C
182     C READ ONE BLOCK OF DATA AND CHECK TO SEE IF BLOCK LENGTH CORRECT
183     C (BLOCKS OF INCORRECT LENGTH ARE NOT OUTPUTTED)
184     C           NSC(N)= TWO BYTE NUMBER OF SCAN OUTPUTTED
185     C
186             CALL READ(IA, LEN, 0, LRN, 1, &460)
187             IF (LEN .NE. LDB) GO TO 420
188             DO 330 N = 1, SPB
189               IX = (N - 1) * NS + 1
190               NSC(N) = IA(IX)
191     C
192     C CHECK TO SEE IF SCAN NUMBER CORRECT (MISSED SCANS ARE NOTTED)
193     C
194               IF (NSC(N) .EQ. ISCAN) GO TO 320
195               IF (NSC(N) - ISCAN .GT. 1) GO TO 290
196               WRITE (6,280) ISCAN
197         280     FORMAT ('0', 4X, 'MISSED SCAN =', I5)
198               GO TO 310
199         290     NSS = NSC(N) - 1
200               WRITE (6,300) ISCAN, NSS
201         300     FORMAT ('0', 4X, 'SCANS', I5, ' TO', I5, ' MISSED')
202         310     ISCAN = NSC(N)
203         320     ISCAN = ISCAN + 1
204         330   CONTINUE
205             IF (KOUT .EQ. 3) GO TO 370
206     C
207     C  UNIT 6 DATA OUTPUT, WRITE BLOCK DOCUMENTATION.
208     C
```

```
209             WRITE (6,340) LEN, LRN, (NSC(N),N=1,SPB)
210       340   FORMAT ('0', 4X, 'DATA BLOCK LENGTH=', I5, 4X, 'LRN=', I6,
211          &        4X, 'SCANS', 10I5)
212       C
213       C WRITE OUT ONE BLOCK OF DATA.
214       C
215             IF (KK .NE. NBR) GO TO 440
216             DO 360 I = 1, SPB
217             IF (I .NE. SPB) GO TO 360
218               NJ = (I - 1) * LDR
219               DO 350 J = 1, LDR
220                 ID(J) = IBYTE(LA(J + NJ))
221       350     CONTINUE
222       C
223       C OUTPUT ONE SCAN OF DATA
224       C
225              WRITE (7,400) I, J, ID(1), ID(2)
226              WRITE (7,400) (ID(J),J=3,LDR)
227               NSOUT = NSOUT + 1
228       360   CONTINUE
229             GO TO 440
230
231       C
232       C UNIT 3 DATA OUTPUT
233       C
234         370   DO 410 I = 1, SPB
235               JB = 3 + (I - 1) * LDR + IBGN
236               JE = JB + 759
237               WRITE (3) NSC(I), (LA(J),J=JB,JE)
238       C
239       C       LA(J) = OUTPUT IN ONE BYTE FORM (UNIT 3)
240       C
241                 NSOUT = NSOUT + 1
242                 IF (ITYPE .EQ. 2) GO TO 410
243                 JB = JB + 735
244                 JE = JB + 19
245                 KKK = 0
246                 DO 390 NNN = JB, JE
247                   KKK = KKK + 1
248                   NX(KKK) = IBYTE(LA(NNN))
249         390     CONTINUE
250                 IF (KK .LT. 5 .OR. KK .GT. 60) GO TO 410
251                 WRITE (7,400) (NX(KKK),KKK=1,20)
252         400     FORMAT (20I4)
253         410   CONTINUE
254               GO TO 440
255       C
256         420   WRITE (6,430) NBCNT, LDB, LEN, LDR, BPS, SPB
257         430   FORMAT ('0', 4X, '*** ERROR IN LENGTH OF DATA BLOCK', I5,
258            &          ' ***', //, 4X, 'LDB=', I7, 4X, 'LEN=', I6, 4X,
259            &          'LDR=',  I6, 4X, 'BPS=', I6, 4X, 'SPB=', I3)
260       440 CONTINUE
261       C
262       C PRINT OUTPUT PARAMETERS
263       C       MAXSC = LAST SCAN OUTPUTTED
264       C       MINSC = FIRST SCAN OUTPUTTED
265       C
266             MAXSC = NSC(SPB)
267             WRITE (6,450) MINSC, MAXSC, NSOUT
268         450 FORMAT ('0', 4X, 'FIRST SCAN OUTPUTTED =', I5, 4X,'LAST SCAN',
269            &        ' OUPUTTED=', I5, 4X, 'NUMBER OF SCAN OUTPUTTED =', I5)
270             IF (KOUT .EQ. 3) END FILE 3
271             GO TO 560
```

```
C*********************************************************************
C ERROR DEFAULT STATEMENTS
C
  190 WRITE (6,200) NORBIT
  200 FORMAT ('0', 4X, '*** CAN NOT FIND PASS WITH LABEL',I5,' ***')
      GO TO 560
  460 WRITE (6,470) NBCNT
  470 FORMAT ('0',4X,'*** ERROR IN RECORD INPUT AT BLOCK',I5,' ***')
      GO TO 560
  480 WRITE (6,490)
  490 FORMAT ('0', 4X, '*** ERROR ON FILE SKIP ***')
      GO TO 560
  500 WRITE (6,510)
  510 FORMAT ('0', 4X, '*** ERROR ON FIRST FILE RETURN ***')
      GO TO 560
  520 WRITE (6,530)
  530 FORMAT ('0', 4X, '*** ERROR ON SECOND FILE RETURN ***')
      GO TO 560
  540 WRITE (6,550)
  550 FORMAT ('0', 4X, '*** ERROR ON DATA BLOCK SKIP ***')
  560 STOP
      END
C
C CONVERT ONE BYTE NUMBER INTO TWO BYTE INTEGER
C
      FUNCTION IBYTE(NUM)
      LOGICAL*1 NUM, INT(2)
      INTEGER*2 I /0/
      EQUIVALENCE (I,INT)
      INT(2) = NUM
      IBYTE = I
      RETURN
      END
C
C CONVERTS ONE BYTE NUMBER TO TWO BYTE MULTIPLE OF 255
C
      FUNCTION JBYTE(NUM)
      LOGICAL*1 NUM, INT(2)
      INTEGER*2 I /0/
      EQUIVALENCE (I,INT)
      INT(1) = NUM
      JBYTE = I
      RETURN
      END
$ENDFILE
$IF RC>4 $SOURCE PREVIOUS
```

```
1     ************** FILE SCANNING **************
2     $EMPTY -SC3 OK
3     $R *FORTG SPUNCH=-SC3 T=2
4     C
5     C PROGRAM TO CONVERT NOAA-9 TAPE INFORMATION TO A GRIDDED DATA
6     C FILED, GENERATE GRID POINT LOCATION OF LATITUDE AND LONGITUDE
7     C LINES FOR USE IN CALCOMP PLOTTING ROUTINES.
8     C
9     C CALL SMOOTHING AND CALIBRATION SUBROUTINE WHEN NECESSARY.
10    C
11    C INPUT FROM UNITS 1,2 AND 3: LATITUDE - LONGITUDE COORDINATES OF
12    C                             OUTLINES TO BE COMPUTED
13    C          UNIT 4   : RAW VALUES OF SATELLITE INFORMATION.
14    C                             PRODUCE BY PROGRAM READTAPE
15    C          UNIT 8   : PROGRAM PARAMETERS
16    C          UNIT 7   : TELEM DATA
17    C
18    C OUTPUT TO UNIT 6 :PROGRAM PARAMETERS, CALCULATED VALUES,
19    C                     AND ERROR STATEMENTS
20    C           UNIT 9 :WEDGE LEVELS AND CALIBRATION DATA FOR PLOTTING
21    C          UNIT 10 :OUTPUT OF TELEMETRY WEDGE LEVELS
22    C          UNIT 11 :GRID COORDINATES OF LATITUDE AND LONGITUDE LINES
23    C          UNIT 13 :OUTPUT OF DATA FIELD
24    C          UNIT 15 :POSTING OF NORTH POLE AND OTHER LOCATIONS
25    C          UNIT 16 :GRID COORDINATES OF OUTLINES
26    C*****************************************************************
27    C
28    C 1/. INPUT TYPE AND INCREMENTS
29    C ITYPE = 0 NO INPUT DATA FROM UNIT 3. USED TO CHECK POSITIONS OR
30    C           OUTPUT LAT-LON LINES ONLY
31    C       = 1 IR DATA FROM FILE SOURCE
32    C       = 2 VISIBLE DATA FROM FILE SOURCE
33    C BSCAN = SCAN NUMBER TO BEGIN PROCESSING
34    C ESCAN = SCAN NUMBER TO END PROCESSING
35    C KB    = FIRST POSITION TO BE PROCESSED
36    C KE    = LAST POSITION TO BE PROCESSED
37    C SMFACT= MAP SCALING FACTOR(1:10,000,000 INPUTTED AS 10E8)
38    C*****************************************************************
39    C
40    C 2/. ORBITAL DATA
41    C NORBIT= NUMBER OF ORBIT
42    C NYEAR = YEAR OF ORBIT
43    C NMO   = MONTH OF ORBIT
44    C NDAY  = DAY OF ORBIT
45    C GRID  = NUMBER OF SCANS BETWEEN LAST EQUATOR CROSSING
46    C         AND FIRST ARRIVAL OF SATELLITE
47    C*****************************************************************
48    C
49    C 3/. ORBITAL DATA FOR REFERENCE ORBIT
50    C RORBIT= NUMBER OF REFRENCE ORBIT
51    C RHR = HOUR OF REFRENCE ORBIT (Z)
52    C RMIN  = MINUTE OF REFERENCE ORBIT
53    C RSEC  = SECOND OF REFERENCE ORBIT
54    C RQ    = QUADRANT OF REFERENCE ORBIT EQUATOR CROSSING
55    C       = 0(5) 0 TO 90 DEGREES LONGITUDE WEST
56    C       = 1 (6) 90 TO 180 DEGREES LONGITUDES WEST
57    C       = 2 (7) 90 TO 180 DEGREES LONGITUDES EAST
58    C       = 3 (8) 0 TO 90 DEGREES LONGITUDES EAST
59    C     0,1,2,3 ARE QUADRANTS FOR NORTHERN HEMISPHERE
60    C     5,6,7,8 ARE QUADRANTS FOR SOUTHERN HEMISPHERE
61    C RLONG = LONGITUDE OF REFERENCE ORBIT EQUATOR CROSSING.
62    C         RQ AND RLONG ARE CODED VALUES READ DIRECTLY FROM T-BUS.
63    C         THE PROGRAM CALCULATES RLONGC FROM THESE VALUES BY
64    C         ASSUMING RIGHT ASCENSION OF THE ORBIT, THAT IS, LONGITUDES
65    C         IS TAKEN TO BE POSITIVE TO EAST AND NEGATIVE TO WEST
66    C        (THESE PARAMETERS WERE OBTAINED FROM T-BUS AND
67    C         T-BUS CODE ASSUMES 0 TO 180 DEGREES EAST AND WEST)
68    C*****************************************************************
69    C
70    C 4/. SATELLITE PARAMETERS
71    C PERIOD = ORBITAL PERIOD IN MINUTES
72    C REGRES = LONGITUDENAL DISPLACEMENT PER ORBIT IN DEG LONG TO WEST
```

```
C           (REGRESSION)
C HEIGHT = HEIGHT OF SATELLITE AT FIRST SCAN IN KM
C ORINCL = INCLINATION OF SATELLITE AT FIRST SCAN IN DEGREES
C SSPP   = SATELLITE SUB-POINT PIXEL NUMBER (NADIR POINT IN SCAN)
C*****************************************************************
C
C 5/. DATA INPUT PARAMETERS (NOT REQUIRED IF ITYPE=0)
C LSMOOT= 0 NO SMOOTHING IS DONE
C       = 1 SMOOTHING IS CARRIED OUT
C LCALIB= 0 NO CALIBRATION IS DONE
C       = 1 CALIBRATION IS CARRIED OUT
C*****************************************************************
C
C 6/. CHECKING PARAMETERS
C CHECK1 = 0 FIRST LAT-LON LINES ARE NOT COMPUTED
C        = 1 FIRST LAT-LON LINES ARE COMPUTED
C OUT1   = 0 NO OUTLINES ARE COMPUTED
C        = 1, 2 OR 3  ONE, TWO OR THREE OUTLINES ARE COMPUTED
C            (MAX 3 OUTLINES ALLOWED)
C*****************************************************************
C
C 7/. OUTLINE TYPE (NOT REQUIRED IF OUT1=0)
C EACH OUTLINE REQUIRES A SEPARATE OUT2 PARAMETER.
C OUT2 = 1 INPUTTED POINTS OUTPUTTED TO UNIT 6. CALCULATED GRID
C          POINT LOCATIONS OUTPUTTED TO UNIT 16
C      = 2 NO OUTPUT OF INPUTTED POINTS. CALCULATED GRID POINT
C          LOCATIONS OUTPUTTED TO UNIT 16
C          MAXIMUM AND MINIMUM ROW AND COLUMN OF GRID LOCATIONS
C          CALCULATED AND OUTPUTTED.
C      = 3 NO OUTPUT OF INPUTTED POINTS.  MAXIMUM AND MINIMUM ROW
C          AND COLUMN OF GRID LOCATIONS CALCULATED AND OUTPUTTED.
C      = 4 INPUTTED POINTS OUTPUTTED TO UNIT 6. CALCULATED GRID
C          POINT LOCATIONS OUTPUTTED TO UNIT 15 FOR POSTING
C      = 5 INPUTTED POINTS WITHIN GRID FIELD OUTPUTTED TO UNIT 6.
C          CALCULATED GRID POINT LOCATIONS OUTPUTTED TO UNIT 6
C
C LENGTH OF OUTPUT (NUMBER OF COLUMNS) IS GIVEN BY PARAMETER MAXSC.
C                  MAXIMUM LENGTH IS 600 SCANS.
C WIDTH OF OUTPUT (NUMBER OF ROWS) IS GIVEN BY IPOS (AND XPOS).
C                  MAXIMUM WIDTH IS 401 POSITIONS, WHICH CORRESPONDS
C                  TO SLIGHTLY LESS THAN ONE HALF THE SCAN WIDTH.
C SIZE OF OUTPUT IS GIVEN BY MTMAT ( MAXSC*IPOS )
C*****************************************************************
C
C 8/. LATITUDE AND LONGITUDE INCREMENTS (NOT REQUIRED IF CHECK1=0)
C LAINCR = INCREMENT FOR LATITUDE LINES (IN DEGREES)
C LOINCR = INCREMENT FOR LONGIUDE LINES (IN DEGREES)
C CHECK2 = SECOND LATITUDE-LONGITUDE CHECKING PARAMETER
C        = 0 DEFAULT VALUES FOR LATITUDE AND LONGITUDE PLOTTING USED
C        = 1 VALUES FOR LATITUDE AND LONGITUDE PLOTTING MUST BE INPUTTED.
C THE DEFAULT VALUES ARE LATITUDES FROM 0 TO 90 DEGREES NORTH,
C LONGITUDES FROM 0 TO 360 DEGREES EAST. POINTS ARE CALCULATED FOR
C EVERY LATITUDE-LONGITUDE INTERSECTION, BUT IF THE OUTPUTTED AREA
C IS SMALL, MOST OF THESE POINTS ARE NOT USED. THEREFORE, JUDICIOUS
C CHOICE OF LATITUDE AND LONGITUDE PARAMETERS LEADS TO GREAT TIME SAVING.
C*****************************************************************
C
C 9/. LATITUDE AND LONGITUDE PLOTTING VALUES.
C  (NOT REQUIRED IF CHECK1=0 OR CHECK2=0)
C
C LABGN = LATITUDE TO BEGIN PLOTTTING
C LAEND = LATITUDE TO END PLOTTTING
C LOBGN = LONGITUDE TO BEGIN PLOTTING
C LOEND = LONGITUDE TO END PLOTTING
C LHEM  = 1 LONGITUDE INPUTTES AS DEGREES EAST
C       = 2 LONGITUDE INPUTTES AS DEGREES WEST
C LATITUDES ARE EXPRESSED IN DEGREES NORTH
C LONGITUDES ARE EXPRESSED IN DEGREES EAST OR WEST
C A MAXIMUM OF 500 POINTS ALLOWED FOR EACH LINE
C*****************************************************************
C
```

```
144     C 10/. SMOOTHING PARAMETERS (NOT REQUIREDD IF ITYPE=0 OR LSMOOT=0)
145     C*********************************************************************
146     C
147     C 11/. CALIBRATION PARAMETERS (NOT REQUIREDD IF ITYPE=0 OR LCALIB=0)
148     C*********************************************************************
149           DIMENSION FNAME(15),SCAN(600),POSN(600)
150           LOGICAL*1 FREE(1) /'*'/, LA(760), LONAME(200,20)
151           INTEGER RORBIT,RQ,RHR,RMIN,RSEC,CHECK1,CHECK2,OUT1,OUT2(3)
152           INTEGER*2 HSCAN, BSCAN, ESCAN
153           REAL LAINCR, LOINCR, SLAT(200), SLONG(200)
154           REAL*8 IROV, POSI, IR, VISIBL, BLANK
155           REAL*8 QUAD, EAST, WEST, HEAD, NORTH, SOUTH, POLE, MONTH(12)
156     C
157           COMMON /TFIELD/ TEMP(401,600)
158           COMMON /CORREC/ CORR(401,600)
159           COMMON /SFIELD/ STEMP(401,600)
160           COMMON /CONST0/ RRL, R, PI, PIB2, SB, XKB, C4, C5
161           COMMON /CONSTS/ RTSC, HEIGHT, SSPP, SRPM, SINCL, CINCL
162     C
163           DATA POSI /'POSITION'/, IR /'INFRARED'/, VISIBL /' VISIBLE'/,
164          &   EAST /' EAST   '/, WEST /' WEST   '/, NORTH /' NORTH  '/,
165          &   SOUTH /' SOUTH  '/, POLE /' AT POLE'/
166           DATA MONTH /' JANUARY', 'FEBRUARY', '   MARCH', '   APRIL',
167          &   '     MAY', '    JUNE', '    JULY', '  AUGUST', 'SEPTEMBR',
168          &   ' OCTOBER', 'NOVEMBER', 'DECEMBER'/
169           DATA MZERO /0/, ZERO /0.0/, YES /'Y'/, STOP /'ST'/, ST01 /' '/
170     C
171           CALL DESTRY('-6 ')
172           CALL DESTRY('-11 ')
173           CALL DESTRY('-13 ')
174           CALL DESTRY('-16 ')
175           CALL FTNCMD('ASSIGN 6=-6', 11)
176           CALL FTNCMD('ASSIGN 11=-11', 13)
177           CALL FTNCMD('ASSIGN 13=-13', 13)
178           CALL FTNCMD('ASSIGN 16=-16', 13)
179     C
180           PI = 3.1415927
181           R = 6367.65
182           PIB2 = PI / 2.0
183           SRPM = 360.0
184           ESRPM = 120.0
185           LHEM = 2
186     C
187     C SRPM = SCAN RATE OF SATELLITE IN REVOLUTIONS PER MINUTE
188     C        (ONE REVOLUTION = ONE SCAN)
189     C ESRPM= EFFECTIVE SRPM
190     C
191           READ (8,FREE) ITYPE, BSCAN, ESCAN, KB, KE, SMFACT
192           READ (8,FREE) NORBIT, NYEAR, NMO, NDAY, GRID
193           READ (8,FREE) RORBIT, RHR, RMIN, RSEC, RQ, RLONG
194           READ (8,FREE) PERIOD, REGRES, HEIGHT, ORINCL, SSPP
195           READ (8,FREE) LSMOOT, LCALIB, CHECK1, OUT1, (OUT2(I),I=1,OUT1)
196           IF (CHECK1 .EQ. 0) GO TO 130
197           READ (8,FREE) LAINCR, LOINCR, CHECK2
198           IF (CHECK2 .EQ. 0) GO TO 120
199           READ (8,FREE) LABGN, LAEND, LOBGN, LOEND
200     C
201     C CONVERT LONGITUDE TO DEGREES EAST AND CONVERT BEGINNING AND ENDING
202     C LATITUDES AND LONGITUDES TO VALUES USED IN LOOPS
203     C
204           IF (LAEND .LT. LABGN) GO TO 50
205           GO TO 70
206     C
207        50 WRITE (6,60)
208        60 FORMAT ('0', '*** ERROR   LATITUDE TO BEGIN PLOTTING ',
209          &       'GREATER THAN LATITUDE TO END PLOTTING ***')
210           LAST = LAEND
211           LAEND = LABGN
212           LABGN = LAST
213     C
214        70 LABGN = LABGN * 10 + 10
```

```
215           LAEND = LAEND * 10 + 10
216           IF (LOEND .LT. LOBGN) GO TO 80
217           GO TO 100
218       C
219          80 WRITE (6,90)
220          90 FORMAT ('0', '*** ERROR   LONGITUDE TO BEGIN PLOTTING ',
221         &        'GREATER THAN LONGITUDE TO END PLOTTING ***')
222           LOST = LOEND
223           LOEND = LOBGN
224           LOBGN = LOST
225         100 IF (LHEM .NE. 2) GO TO 110
226           LOST = LOEND
227           LOEND = 360 - LOBGN
228           LOBGN = 360 - LOST
229         110 LOBGN = LOBGN * 10 + 10
230           LOEND = LOEND * 10 + 10
231           GO TO 130
232       C
233         120 LABGN = 10
234           LAEND = 910
235           LOBGN = 10
236           LOEND = 3610
237       C*** DETERMINE OUTPUT TYPE ***
238         130 IROV = POSI
239           IF (ITYPE .EQ. 1) IROV = IR
240           IF (ITYPE .EQ. 2) IROV = VISIBL
241       C*** CALCULATE PROGRAM CONSTANTS FROM INPUT PARAMETERS ***
242           IF (RQ.EQ.0 .OR. RQ.EQ.5) RLONGC = 360. - RLONG
243           IF ((RQ.EQ.1 .OR. RQ.EQ.6) .AND. RLONG.GE.90.) RLONGC = 360.-RLONG
244           IF ((RQ.EQ.1 .OR. RQ.EQ.6) .AND. RLONG.LT.90.)
245          &RLONGC = 360. - RLONG - 100.
246           IF ((RQ .EQ. 2 .OR. RQ .EQ. 7) .AND. RLONG .LT. 90.)
247          &RLONGC = RLONG + 100.
248           IF ((RQ.EQ.2 .OR. RQ.EQ.7) .AND. RLONG.GE.90.) RLONGC = RLONG
249           IF (RQ.EQ.3 .OR. RQ.EQ.8) RLONGC = RLONG
250       C*** CALCULATE LONGITUDE OF LAST EQUATOR CROSSING ***
251           RL = RLONGC - (NORBIT-RORBIT) * REGRES
252           RL = AMOD(RL, 360.0)
253           IF (RL .LT. 0.0) RL = RL + 360.0
254           RRL = RL * PI / 180.0
255       C*** CONVERT TO EAST-WEST LONGITUDE FOR OUTPUT ONLY ***
256           QUAD = EAST
257           RLOUT = RL
258           IF (180.0 - RL) 140, 150, 160
259         140 QUAD = WEST
260           RLOUT = 360.0 - RL
261           GO TO 160
262         150 QUAD = BLANK
263       C*** DETERMINE TIME AT FIRST OUTPUTTED SCAN OF ORBIT ***
264         160 RTIME = RHR * 60 + RMIN + RSEC / 60.0
265           STIME = RTIME + (NORBIT-RORBIT)*PERIOD + (GRID + BSCAN)/SRPM
266           SHR = AMOD(STIME,1440.0)
267           IF (SHR .LT. 0.0) SHR = SHR + 1440.0
268           NHR = SHR / 60.0
269           TIMIN = SHR - NHR * 60.0
270           NMIN = TIMIN
271           SSEC = TIMIN - NMIN
272           NSEC = SSEC * 60.0
273           XKB = FLOAT(KB)
274       C*** DETERMINE GRID LENGTH, WIDTH AND SIZE OF FINAL OUTPUT ***
275           IPOS = (KE - KB) + 1
276           XPOS = FLOAT(IPOS)
277           MAXSC = ESCAN - BSCAN + 1
278           IF (ITYPE .EQ. 0) GO TO 170
279           IF (MAXSC .GT. 600) GO TO 1080
280           IF (IPOS .GT. 401) GO TO 1100
281           MTMAT = MAXSC * IPOS
282           RTMAT = MTMAT / 1000.0
283           SCAMIN = 0.0
284           POSMIN = 0.0
285       C
```

```
C DETERMINE NUMBER OF SCANCS PER RADIANT OF ORBIT AND
C CONVERT BSCAN AND ESCAN TO RADIAN ANGLES
C
  170 RTSC = PERIOD * ESRPM / (PI * 2.0)
      SB = (BSCAN + GRID) / RTSC
      SE = (ESCAN + GRID) / RTSC
C*** DETERMINE LIMITS FOR POSITIONS AND SCANS OF LAT-LON LINES ***
      DPOS = 0.050 * XPOS
      PB1 = 1.0 - DPOS
      PB2 = PB1 - 2.0 * DPOS
      PE1 = XPOS + DPOS + 1
      PE2 = PE1 + 2 * DPOS
      DSCAN = 0.050 * (SE - SB)
      SB1 = SB - DSCAN
      SB2 = SB1 - 2.0 * DSCAN
      SB3 = SB2 - 2.0 * DSCAN
      SE1 = SE + DSCAN
      SE2 = SE1 + 2.0 * DSCAN
      SE3 = SE2 + 2.0 * DSCAN
C*** DETERMINE SATELLITE HEADING ***
      HEAD = POLE
      IF (SB.LT.PIB2 .AND. SE.LT.PIB2) HEAD = NORTH
      IF (SB.GT.PIB2 .AND. SE.GT.PIB2) HEAD = SOUTH
C
C DETERMINE SCALING FACTORS (IN GRID UNITS PER INCH)
C THESE FACTORS DUE TO THE FACT THAT PIXELS ARE NOT SQUARE
C
      SMFACT = SMFACT * 1E-6
      DISTP = 4.28
      DISTS = 3.31
      C3 = 2.54
C*** C3  = CONVERSION FACTOR CM TO INCHES ***
      SCALP = SMFACT * 10.0 * C3 / DISTP
      SCALS = SMFACT * 10.0 * C3 / DISTS
C*** DETERMINE IF OUTPUT WIDTH IS WIDE ***
      IF (XPOS/SCALP .GT. 32.0) GO TO 1100
C*** SATELLITE INCLINATION ***
  180 RINC = ORINCL * PI / 180.0
      SINCL = SIN(RINC)
      CINCL = COS(RINC)
C*** PRINT INPUT DATA AND PRELIMINARY CALCULATIONS ***
      WRITE (6,190) IROV,NORBIT,MONTH(NMO),NDAY,NYEAR,NHR,NMIN,NSEC
  190 FORMAT ('1', /, 5X, A8, ' INFORMATION FROM ORBIT', I6, ' OF ',
     &        'SATELLITE NOAA-9 ON ', A8, I3, I5, /, 5X,
     &        'TIME OF FIRST SCAN', I3, ':', I2, ':', I2, ' Z', /)
C
      WRITE (6,200) HEAD, GRID, RLOUT, QUAD, RORBIT
  200 FORMAT (/, 5X, 'SATELLITE HEADING IS ', A8, //, 5X, F6.1,
     &        ' SCANS PASSED SINCE SATELLITE LAST CROSSED EQUATOR', /
     &        /, 5X, 'AT LONGITUDE', F7.2, ' DEGREES', A8, ///, 5X,
     &        'REFERENCE ORBIT', I6, //)
C
      WRITE (6,210) RLONGC, RHR, RMIN, RSEC
  210 FORMAT (5X,'CROSSED EQUATOR AT LONGITUDE',F7.2,' DEGREES EAST'
     &        , 5X, 'AT TIME', I3, ':', I2, ':', I2, ' Z', //)
C
      WRITE (6,220) PERIOD, REGRES, HEIGHT, R, ORINCL, SRPM
  220 FORMAT (5X, 'ORBITAL PERIOD =', F10.5, ' MIN', //, 5X,
     &        'LONGITUDNAL INCREMENT =', F8.2,' DEGREES TO WEST', //,
     &        5X, 'HEIGHT OF SATELLITE AT EQUATOR =', F6.0, ' KM',5X,
     &        'RADIUS', ' OF EARTH =', F8.0, ' KM', //, 5X,
     &        'ORBITAL INCLINATION =', F7.2, ' DEG', 5X,
     &        'SCANNING RATE =', F4.0, ' SCANS PER MINUTE')
C
      WRITE (6,230) BSCAN, ESCAN, KB, KE, SSPP
  230 FORMAT ('-', /5X, 'SCANNING BEGINS AT', I5,' AND ENDS AT',I5,/
     &        /, 5X, 'OUPUT TAKES UP', I4, ' TO', I4,
     &        ' OF AVAILABLE WIDTH', //, 5X,
     &        'SATELLITE SUBPOINT PIXEL NUMBER =', F7.2, //)
C
```

```
      WRITE (6,240) DISTS, SCALS, DISTP, SCALP, SMFACT
  240 FORMAT (5X, 'DISTANCE BETWEEN SCANS =', F5.2, ' KM', //, 5X,
     &  'SCALING =', 1PE11.4, ' GRID UNITS PER INCH IN X DIRECTION',
     &    //, 5X, 'DISTANCE BETWEEN POINTS =',0PF5.2, ' KM', //, 5X,
     &  'SCALING =', 1PE11.4, ' GRID UNITS PER INCH IN Y DIRECTION',
     &    //, 5X, 'MAP SCALE = 1:', 0PF5.2, ' MILLION')
C
      IF (ITYPE .EQ. 0) GO TO 430
C
C INPUT LOOP FOR DATA FIELD
C READ AND INPUT SCANS BETWEEN BSCAN AND ESCAN
C
C HSCAN= NUMBER OF SCANS SINCE FIRST ARRIVAL OF SATELLITE SIGNAL,
C    FROM PROGRAM TAPEREAD. IT IS READ DIRECTLY FROM UNIT 3 FOR EACH
C    SCAN. IF SCAN NUMBER CORRESPONDING WITH BSCAN IS NOT AVAILABLE
C    FROM UNIT 3, PROGRAM WILL BEGIN READING FIRST SCAN AVAILABLE.
C    IF ESCAN IS LARGER THAN THE LAST SCAN TRANSFERRED BY PROGRAM
C    TAPEREAD TO UNIT 3, AN END OF FILE MARK WILLE BE ENCOUNTERED.
C    BOTH CASES RESULT IN PROGRAM FAILURE
C
  270 READ (4,END=1260) HSCAN, LA
      IF (HSCAN .LT. BSCAN) GO TO 270
      IF (HSCAN .GT. ESCAN) GO TO 290
      MSCAN = HSCAN - BSCAN + 1
      ICNT = 0
      DO 280 JP = KB, KE
        ICNT = ICNT + 1
        DATUM = FLOAT(IBYTE(LA(JP)))
        IF (DATUM .LT. 1.0) DATUM = 1.0E35
        TEMP(ICNT,MSCAN) = DATUM
  280 CONTINUE
      IF (ICNT .NE. IPOS) GO TO 1140
      GO TO 270
  290 IF (MAXSC - MSCAN) 300, 320, 300
  300 WRITE (6,310) MSCAN
  310 FORMAT ('0', '*** ERROR   INCORRECT DATA LENGTH ', 5X, I7,
     &        ' SCANS IN OUTPUT ***')
      IF (MSCAN .GT. 600) GO TO 1280
      MAXSC = MSCAN
  320 WRITE (6,330)
  330 FORMAT ('-', /, 10X, 'DATA FIELD PARAMETERS')
C*** SMOOTHING OF DATA FIELD ***
      IF (LSMOOT .EQ. 0) GO TO 340
      CALL SMOOTH(MAXSC, IPOS)
      GO TO 360
  340 WRITE (6,350)
  350 FORMAT ('-', 14X, 'NO SMOOTHING OF DATA FIELD USED')
C*** CALIBRATION OF DATA FIELD ***
  360 IF (ITYPE .EQ. 1) GO TO 365
      GO TO 370
  365 IF (LCALIB .EQ. 0) GO TO 370
      CALL CALIBR(MAXSC, IPOS)
      GO TO 390
  370 WRITE (6,380)
  380 FORMAT ('-', 14X, 'NO CALIBRATION OF DATA FIELD USED')
C*** WRITE CALIBRATED FIELD TO UNIT 13 ***
  390 WRITE (13) IPOS, MAXSC
      DO 400 JJ = 1, MAXSC
  400 WRITE (13) (TEMP(II,JJ),II=1,IPOS)
C*** CHECK DATA FIELD FOR MAX AND MIN VALUES ***
      TMIN = 500.0
      TMAX = -500.0
C*** FIND MAXIMUM AND MINIMUM OF DATA FIELD ***
      DO 410 JJ = 1, MAXSC
        DO 410 II = 1, IPOS
          IF (TEMP(II,JJ) .LT. TMIN) TMIN = TEMP(II,JJ)
          IF (TEMP(II,JJ) .GT. TMAX) TMAX = TEMP(II,JJ)
  410 CONTINUE
      WRITE (6,420) MAXSC, IPOS, RTMAT, TMIN, TMAX
  420 FORMAT ('-', //, 5X, 'GRID DIMENSIONS : COLUMNS 1 TO', I5, 5X,
     &   'ROWS 1 TO', I5, //, 5X, 'GRID SIZE =', F6.2, 'K ELEMENTS',
     &   //, 5X, 'EXTREME VALUES OF DATA FIELD', /, 5X,
     &   ' MINIMUM =', F6.1, 5X, 'MAXIMUM =', F6.1)
```

```
429       430 IF (CHECK1 .EQ. 0) GO TO 640
430      C*** DETERMINE INCREMENTS FOR FINDING LATITUDE AND LONGITUDE CURVES ***
431           LALAT = LAINCR * 10 + 0.50
432           IF (LALAT .LT. 1) LALAT = 1
433           LOLAT = LAINCR * 2 + 0.50
434           IF (LOLAT .LT. 1) LOLAT = 1
435           LOLON = LOINCR * 10 + 0.50
436           IF (LOLON .LT. 1) LOLON = 1
437           LALON = LOINCR * 1 + 0.50
438           IF (LALON .LT. 1) LALON = 1
439           WRITE (6,440) LAINCR, LOINCR
440       440 FORMAT ('-', 10X, 'LATITUDE-LONGITUDE PARAMETERS', ///, 5X,
441          &       'LATITUDE LINES GENERATED EVERY', F5.1, ' DEGREES', 4X,
442          &       '500 POINTS ALLOWED FOR EACH LINE', //, 5X,
443          &       'LONGITUDE LINES GENERATED EVERY', F5.1, ' DEGREES',4X,
444          4       '500 POINTS ALLOWED FOR EACH LINE')
445      C
446      C OUTLINES AND LATITUDE, LONGITUDE LINE COMPUTATIONS (THE FOLLOWING
447      C MAY BE SIGNIFICANTLY SIMPLIFIED BY RESTRICTING THE INPUT-OUTPUT OPTIONS.)
448      C
449           CALL EQNS(REGRES)
450           WRITE (6,450)
451       450 FORMAT ('-', 14X, 'LATITUDE-LONGITUDE LINES OUTPUTTED TO UNIT 11')
452           KCHECK = 0
453      C*** DETERMINE POINTS FOR LATITUDE LINES ***
454           WRITE (6,460)
455       460 FORMAT ('0', 7X, 'LATITUDE LINES', /)
456      C*** INCREMENT LATITUDE LINES TO BE FOUND ***
457           DO 530 LAT = LABGN, LAEND, LALAT
458             ALAT = (LAT - 10) / 10.0
459             LLAT = IFIX(ALAT)
460             LOLATA = LOLAT
461      C
462      C ONLY ONE-FIFTH NUMBER OF POINTS USED IN
463      C LATITUDE LINES NORTH OF 80 DEGREES
464      C
465             IF (ALAT .GT. 80.0) LOLATA = 5 * LOLAT
466             IF (ALAT .GT. 90.0) GO TO 540
467             MM = 1
468      C*** INCREMENT LONGITUDE INTERSECTIONS TO DETERMINE EACH LATITUDE LINE ***
469             CALL ITERL(ALAT)
470             DO 480 LONG = LOBGN, LOEND, LOLATA
471               BLONG = (LONG - 10) / 10.0
472               CALL ITERA(BLONG, SCAN(MM), POSN(MM), MCHECK, SB1, SB2,
473          &          SE1, SE2, PB1, PE1)
474               IF (MCHECK .EQ. 1) GO TO 470
475               IF (MM .EQ. 1) GO TO 480
476               KCHECK = KCHECK + 1
477               GO TO 490
478       470     IF (SCAN(MM) .LT. SCAMIN) SCAMIN = SCAN(MM)
479               IF (SCAN(MM) .GT. SCAMAX) SCAMAX = SCAN(MM)
480               IF (POSN(MM) .LT. POSMIN) POSMIN = POSN(MM)
481               IF (POSN(MM) .GT. POSMAX) POSMAX = POSN(MM)
482               MM = MM + 1
483       480     CONTINUE
484       490     MM = MM - 1
485               IF (MM .LE. 2) GO TO 530
486      C*** OUTPUT LATITUDE LINE SEGMENT ***
487             WRITE (6,500) ALAT, MM
488       500   FORMAT (' ', 5X, 'LATITUDE =', F5.1, ' DEGREES NORTH', 5X,
489          &          'POINTS IN LATITUDE LINE =', I4)
490             WRITE (11,510) MM, MZERO, LLAT
491       510   FORMAT (3I4)
492             WRITE (11,520) (SCAN(I),POSN(I),I=1,MM)
493       520   FORMAT (2F7.2)
494             KCHECK = KCHECK + 1
495       530 CONTINUE
496           GO TO 560
497      C*** DETERMINE POINTS FOR LONGITUDE LINES ***
498       540 WRITE (6,550)
499       550 FORMAT ('0', '*** ERROR   END VALUE FOR FINAL LATITUDE LINE',
500          &       ' LARGER THAN 90 DEGREES ***')
```

```
501       580 WRITE (6,570)
502       570 FORMAT ('0', 7X, 'LONGITUDE LINES', /)
503     C*** INCREMENT LONGITUDE LINES TO BE FOUND ***
504           DO 620 LONG = LOBGN, LOEND, LOLON
505             ALONG = (LONG - 10) / 10.0
506             LLONG = IFIX(ALONG)
507             IF (ALONG .GT. 360.0) GO TO 1160
508             VLONG = ALONG / (2.0*LOLON) - IFIX(ALONG/(2.0*LOLON))
509             MM = 1
510     C*** INCREMENT LATITUDE INTERSECTIONS TO DETERMINE EACH LONGITUDE LINE ***
511             DO 590 LAT = LABGN, LAEND, LALON
512             BLAT = (LAT - 10) / 10.0
513     C
514     C EXTEND ONLY EVERY SECOND LONGITUDE LINE PAST 85 DEGREES NORTH
515     C TO AVOID CROWDING
516     C
517               IF (BLAT .GT. 85. .AND. VLONG .GT. 0.1) GO TO 620
518               CALL ITERL(BLAT)
519               CALL ITERA(ALONG, SCAN(MM), POSN(MM), MCHECK, SB2, SB3,
520          &            SE2, SE3, PB2, PE2)
521               IF (MCHECK .EQ. 1) GO TO 580
522               IF (MM .EQ. 1) GO TO 590
523               KCHECK = KCHECK + 1
524               GO TO 600
525       580     IF (SCAN(MM) .LT. SCAMIN) SCAMIN = SCAN(MM)
526               IF (SCAN(MM) .GT. SCAMAX) SCAMAX = SCAN(MM)
527               IF (POSN(MM) .LT. POSMIN) POSMIN = POSN(MM)
528               IF (POSN(MM) .GT. POSMAX) POSMAX = POSN(MM)
529               MM = MM + 1
530       590     CONTINUE
531       600     MM = MM - 1
532               IF (MM .LE. 2) GO TO 620
533     C
534     C OUTPUT LONGITUDE LINE SEGMENT
535     C(ONLY ONE SEGMENT POSSIBLE FOR EACH LONGITUDE LINE)
536     C
537               WRITE (6,610) ALONG, MM
538       610     FORMAT (' ', 5X, 'LONGITUDE =', F6.1, ' DEGREES EAST', 5X,
539          &            'POINTS IN LONGITUDE LINE =', I4)
540               WRITE (11,510) MM, MZERO, LLONG
541               WRITE (11,520) (SCAN(I),POSN(I),I=1,MM)
542       620 CONTINUE
543     C
544             WRITE (6,630) KCHECK, SCAMIN, SCAMAX, POSMIN, POSMAX
545       630 FORMAT ('0', 7X, I4,' LATITUDE-LONGITUDE LINES OUTPUTTED TO ',
546          &       'UNIT 11', //, 5X, 'LAT LON LINES FORM BOX: COLUMNS',
547          &       F5.0, ' TO', F5.0, ' ROWS', F5.0, ' TO', F5.0)
548             GO TO 660
549       640 WRITE (6,650)
550       650 FORMAT ('-', /, 10X, 'NO LATITUDE LONGITUDE LINES GENERATED')
551     C*** DETERMINE GRID COORDINATES OF INPUTTED LAT-LON POINTS ***
552       660 IF (OUT1 .EQ. 0) GO TO 1000
553             WRITE (6,670)
554       670 FORMAT ('-', /, 10X, 'OUTLINE PARAMETERS ', //)
555     C
556             CALL EQNS(REGRES)
557             DO 990 LUNIT = 1, OUT1
558               IF (LUNIT .GT. 3) GO TO 1180
559               WRITE (6,690) LUNIT
560       690     FORMAT (' ', 14X, 'LAT-LON POINTS FROM UNIT', I3, /)
561               IF (OUT2(LUNIT) .LT. 1 .OR. OUT2(LUNIT) .GT. 5) GO TO 1220
562               READ (LUNIT,700) (FNAME(I),I=1,15)
563       700     FORMAT (15A4)
564               II = 0
565               MM = 0
566               KCHECK = 0
567     C*** INPUT LOOP FOR LAT-LON OUTLINE INTERSECTIONS ***
568       710     II = II + 1
569               MM = MM + 1
570               MCHECK = 0
571               READ (LUNIT,715,END=850,ERR=1200) XLAT,XLON,(LONAME(II,J),J=1,20)
572       715     FORMAT(F6.2,1X,F6.2,4X,20A1)
573     C
```

```
C XLAT = LATITUDE COORDINATE OF POINT (IN DEGREES AND MINUTES)
C XLON = LONGITUDE COORDINATE OF POINT (IN DEGREES AND MINUTES)
C
C CONVERT DEGREES AND MINUTES TO DECIMAL DEGREES
C
      SLAT(II) = IFIX(XLAT) + ((XLAT - IFIX(XLAT))*100./60.)
      SLONG(II) = IFIX(XLON) + ((XLON - IFIX(XLON))*100./60.)
      IF (LHEM .EQ. 2) SLONG(II) = 360.0 - SLONG(II)
      CALL ITERL(SLAT(II))
      CALL ITERA(SLONG(II), SCAN(MM), POSN(MM), MCHECK, SB2, SB3,
     &     SE2,SB3, PB2, PE2)
      IF (MCHECK.EQ.1 .OR. MM.LE.1) GO TO 710
      IF (OUT2(LUNIT) .EQ. 3) GO TO 930
C*** OUTPUT OUTLINE SEGMENT ***
      KCHECK = KCHECK + 1
      MM = MM - 1
      IF (OUT2(LUNIT) - 4) 720, 750, 780
  720 WRITE (6,730) MM
  730 FORMAT ('0', 4X, I4, ' GRID COORDINATE POINTS OF OUTLINE',
     &       ' TRANSFERRED TO UNIT 16')
      WRITE (16,740) MM
  740 FORMAT (I4)
      WRITE (16,745) (SCAN(I),POSN(I),(LONAME(I,J),J=1,20),I=1,MM)
  745 FORMAT (2F7.2,1X,20A1)
      GO TO 820
  750 WRITE (6,760) MM
  760 FORMAT('0',4X,I4,' GRID COORDINATE POINTS CONTAINED IN UNIT'
     &     ,' 16 OUTPUT AREA TRANSFERRED TO UNIT 15 FOR POSTING')
      WRITE (15,770) (SCAN(I),POSN(I),ZERO,I=1,MM)
  770 FORMAT (3F7.2)
      GO TO 820
  780 WRITE (6,790)
  790 FORMAT ('0', 4X, 'INPUTTED POINTS', /)
      WRITE (6,800) (SLAT(I),SLONG(I),I=1,MM)
  800 FORMAT (' ',8(F7.2,F7.2,3X))
      WRITE (6,810)
  810 FORMAT ('0', 4X, 'GRID COORDINATES', /)
      WRITE (6,800) (SCAN(I),POSN(I),I=1,MM)
  820 MM = 0
      GO TO 710
C*** END OF OUTLINE FILE GO ON ***
  850 II = II - 1
      IF (MCHECK.EQ.0 .AND. MM.LE.1) GO TO 900
      KCHECK = KCHECK + 1
      IF (OUT2(LUNIT) - 4) 860, 870, 890
  860 IF (OUT2(LUNIT) .EQ. 3) GO TO 900
      MM = MM - 1
      WRITE (6,730) MM
      WRITE (16,740) MM
      WRITE (16,745) (SCAN(I),POSN(I),(LONAME(I,J),J=1,20),I=1,MM)
      IF (OUT2(LUNIT) - 2) 880, 900, 900
  870 WRITE (6,760) MM
      WRITE (15,770) (SCAN(I),POSN(I),ZERO,I=1,MM)
  880 WRITE (6,790)
      WRITE (6,800) (SLAT(I),SLONG(I),I=1,II)
      GO TO 950
  890 WRITE (6,790)
      WRITE (6,800) (SLAT(I),SLONG(I),I=1,MM)
      WRITE (6,810)
      WRITE (6,800) (SCAN(I),POSN(I),I=1,MM)
      GO TO 950
C
C DETERMINE MAXIMUM AND MINIMUM SCAN AND POSITION VALUES
C OF LAT-LON INTERSECTION WITHIN EXTENDED LIMITS OF GRID
C
  900 SCAMIN = 1.0E30
      SCAMAX = -1.0E30
      POSMIN = 1.0E30
      POSMAX = -1.0E30
      DO 910 JI = 1, MM
        IF (SCAN(JI) .LT. SCAMIN) SCAMIN = SCAN(JI)
        IF (SCAN(JI) .GT. SCAMAX) SCAMAX = SCAN(JI)
```

```
                IF (POSN(JI) .LT. POSMIN) POSMIN = POSN(JI)
                IF (POSN(JI) .GT. POSMAX) POSMAX = POSN(JI)
  910       CONTINUE
            WRITE (6,920) SCAMIN, SCAMAX, POSMIN, POSMAX
  920       FORMAT ('0',4X,'OUTLINE OCCUPIES BOX CONTAINING SCANS',F5.0,
           &        ' TO', F5.0, 4X, 'AND POSITIONS', F5.0, ' TO', F5.0)
            GO TO 950
  930       WRITE (6,940)
  940       FORMAT ('0','*** ERROR . OUTLINE EXCEEDS LIMITS OF DATA FIELD ***')
  950       IF (KCHECK .EQ. 0) GO TO 1240
            IF (OUT2(LUNIT).EQ.1 .OR. OUT2(LUNIT).EQ.2)WRITE(6,960)
  960       FORMAT ('0',4X,'GRID POINT POSITIONS OF OUTLINE TRANSFERRED'
           &        ' TO UNIT 16')
            IF (OUT2(LUNIT) .EQ. 3 .OR. OUT2(LUNIT) .EQ. 5) GO TO 970
  970       WRITE (6,980)
  980       FORMAT ('0')
  990     CONTINUE
 1000     STOP
C
C ******************   ERROR DEFAULT STATEMENTS     ******************
C
 1060     WRITE (6,1070)
 1070     FORMAT ('0', '*** ERROR   INVALID PARAMETERS FOR WIDTH OF',
          &        ' OUTPUTTED FIELD ***')
          GO TO 1280
 1080     WRITE (6,1090) MAXSC
 1090     FORMAT ('0','*** ERROR   OUTPUT TOO LONG',5X, I6,' SCANS IN',
          &        ' OUTPUT, FORMAT ALLOWS ONLY 600 SCANS ***')
          GO TO 1280
 1100     WRITE (6,1110) IPOS
 1110     FORMAT ('0','*** ERROR   OUTPUT TOO WIDE',5X, I6,' POSITIONS',
          &    ' IN OUTPUT. FORMAT ALLOWS ONLY 401 POSITIONS ***')
          GO TO 1280
 1140     WRITE (6,1150) HSCAN
 1150     FORMAT ('0', '*** ERROR   INCORRECT DATA LENGTH FOR SCAN', I6, ***')
          GO TO 1280
 1160     WRITE (6,1170)
 1170     FORMAT ('0', '*** ERROR   END VALUE FOR FINAL LONGITUDE LINE',
          &        ' LARGER THAN 360 DEGREES ***')
          GO TO 1280
 1180     WRITE (6,1190)
 1190     FORMAT ('0', '*** ERROR   TOO MANY OUTPUT UNITS CALLED FOR',
          &        ' OUTLINE  PROCEDURE ***')
          GO TO 1280
 1200     WRITE (6,1210) LUNIT
 1210     FORMAT ('0', '*** ERROR   IN UNIT', I2, ' READ ***')
          GO TO 1280
 1220     WRITE (6,1230) OUT2(LUNIT)
 1230     FORMAT ('0', '*** ERROR   OUTLINE TYPE OUT2 INCORRECTLY',
          &        ' SPECIFIED AS', I8, ' ***')
          GO TO 1280
 1240     WRITE (6,1250)
 1250     FORMAT ('0', '*** ERROR   FAILURE IN OUTLINE PROCEDURE, NO',
          &        ' POINTS FOUND WITHIN GRID LIMITS ***')
          GO TO 1280
 1260     WRITE (6,1270)
 1270     FORMAT ('0', '*** ERROR   END OF FILE ON UNIT 4 ***')
          STOP 99
 1280     STOP
          END
C
C     CONVERT ONE BYTE NUMBER INTO TWO BYTE INTEGER
C
          FUNCTION IBYTE(NUM)
          LOGICAL*1 NUM, INT(2)
          INTEGER*2 I /0/
          EQUIVALENCE (I,INT)
          INT(2) = NUM
          IBYTE = I
          RETURN
          END
```

```
      C
      C ***************************************************************
      C
            SUBROUTINE ITERA(ALONG, SCAN, POSN, MCHECK, SBA, SBAA,
           &                 SEA, SEAA, POSB, POSE)
      C
      C SUBROUTINE FOR DETERMINING IF LAT - LON INTERSECTION IS
      C WITHIN EXTENDED LIMITS OF GRID, AND FOR DETERMINING
      C EXACT LOCATION IF IT IS
      C
      C ALAT   = LATITUDE OF LAT - LON INTERSECTION
      C ALONG  = LONGITUDE OF LAT - LON INTERSECTION
      C MCHECK = 0 POINT OUTSIDE EXTENDED LIMITS OF GRID
      C        = 1 POINT INSIDE EXTENDED LIMITS OF GRID
      C SBA    = EXTENDED SCAN TO BEGIN OUTPUT
      C SBAA   = OVER EXTENDED SCAN TO BEGIN OUTPUT (FIRST CHECK ONLY)
      C SEA    = EXTENDED SCAN TO END OUTPUT
      C SEAA   = OVER EXTENDED SCAN TO END OUTPUT (FIRST CHECK ONLY)
      C POSB   = EXTENDED POSITION TO BEGIN OUTPUT
      C POSE   = EXTENDED POSITION TO END OUTPUT
      C SCAN   = SCAN LOCATION OF ITH POINT IN LINE
      C POSN   = POSITION LOCATION OF ITH POINT IN LINE
      C
      C APT GEOMETRIC CORRECTION DATA
      C
            COMMON/ CONSTO/ RRL, R, PI, PIB2, SB, XKB, C4, C5
            COMMON/ CONSTS/ RTSC, HEIGHT, ZDRP, SRPM, SI, CI
            DIMENSION XNR(4), XAV(5)
            LOGICAL*1 FREE(1)/'*'/
            DATA XNR/312.0, 330.0, 166.0, 93.0/
            DATA XAV/4.0, 3.0, 2.0, 1.5, 1.0/
      C
            MCHECK = 0
            THETA = RRL - (ALONG * PI/180.0)
      C
            X1 = SI * SLAT + SIN(THETA - TPL * SP) * ( - CI) * CLAT
            X2 = COS(THETA - TPL * SP) * CLAT
            SNT = ATAN2(X1, X2)
            IF(SNT.LT.0.0 .AND. SP.GT.PIB2) SNT = SNT + (PI * 2.0)
            IF(SNT.GE.SBAA .AND. SNT.LE.SEAA) GO TO 10
            SP = SNT
            RETURN
      C*** ITERATE TO FIND SATELLITE PATH LENGTH  FROM EQUATOR ***
         10 DO 20 J = 1, 10
            ST = THETA - TPL * SNT
            CT = COS(ST)
            ST = SIN(ST)
            CSNT = COS(SNT)
            SSNT = SIN(SNT)
            X1 = CLAT * (SSNT*CT + CI*CSNT*ST) - SI * SLAT * CSNT
            X2 = CLAT * ((1.-TPL*CI)*CSNT*CT + (TPL-CI)*SSNT*ST)+SI*SLAT*SSNT
            SP = SNT - X1/X2
      C*** SIN(EARTH ARC LENGTH FROM SUBPOINT) ***
            ST = SIN(THETA - TPL*SP) * SI * CLAT + CI * SLAT
      C*** CHECK TO SEE IF NADIR ANGLE > FALSE HORIZON ***
            IF(ABS(ST) .GT. SGH) RETURN
            IF(ABS(SNT - SP) .LT. 1E-6) GO TO 40
            SNT = SP
         20 CONTINUE
            WRITE(6, 30) ALAT, ALONG
         30 FORMAT(1H ,'**** ERROR NO CONVERGENCE TO POINT AT LATITUDE',
           & F7.1, '  AND LONGITUDE', F7.1, '  DEGREES ****')
            RETURN
      C
         40 IF(SNT .LT. SBA .OR. SNT .GT. SEA) RETURN
      C*** CALCULATE SENSOR NADIR ANGLE (FROM SUBPOINT) ANGLE AT EARTH'S CENTER ***
            X3 = R * ST
            X4 = HEIGHT + R * (1.0 - SQRT(1.0 - ST*ST))
            Y = ATAN(X3/X4)
      C
      C NOAA-9  : DATA POSITION ALONG AVHRR SCAN.  40000HZ @ 6SCANS/SEC
      C FIND (4160HZ) APT POSITION FROM AVERAGED  AVHRR DATA CONVERT
      C TO 3200HZ DIGITIZE RATE (USING C5), CENTER = 350.
```

```
C RESTRICT 0 < IPOS < 700 = (2 * ZDRP).
C
C DIGF = DIGITIZING FREQUENCY OF SATELLITE IN DATA VALUES PER SECOND
C C4   = CONVERSION FACTOR (AHVRR RADIAN SCAN ANGLE TO DATA VALUE
C        POSITION). THE ZERO DEGREE REFERENCE FOR SATELLITE IS
C        DIRECTLY ABOVE THE SUBPOINT AT DATA VALUE SSPP. SCANNING IS
C        RESTRICTED TO WITHIN 54' OF SATELLITE SUBPOINT FOR TIROS-N/
C        NOAA A-9 SATELLITES. EACH DATA RECORD (EITHER IR OR VISIBLE
C        DATA) CONTAINS 699 DATA VALUES (PLUS SCAN NUMBER). MIDPOINT
C        IS AT DATA VALUE SSPP. THEREFORE, ALL VALUES MEASURED FROM
C        ZERO DEGREE REFERENCE ARE CONVERTED TO DATA VALUE POSITIONS
C        BY MULTIPLYING BY C4 AND ADDING SSPP.
C        C4 IS INITIALIZED IN 'ENTRY EQNS' IN ITERA
C
         Y = C4 * ABS(Y)
         IF(Y .GT. 1025.0) RETURN
         SNT = 0.0
         DO 50 J = 1, 4
         SGN = XNR(J)
         IF(Y .LT. SGN) GO TO 60
         SNT = SNT + SGN / XAV(J)
         Y = Y - SGN
   50    CONTINUE
          J = 5
   60    Y = SNT + Y / XAV(J)
         IF(ST .LT. 0.0) Y =  - Y
C*** NOAA-9 : CALCULATE  POSITION FOR DIGITIZING FREQUENCY ***
         SCAN = (SP - SB) * RTSC + 1.0
         POSN = Y * C5 + ZDRP - XKB
         IF(POSN.LT.POSB .OR. POSN.GT.POSE) RETURN
         MCHECK = 1
         RETURN
C
         ENTRY EQNS(REGRES)
C*** HORIZON ANGLE ***
         TPL = REGRES / 360.0
C*** SIN(HORIZON EARTH ARC) ***
         SGH = SIN(15.0 * PI/180.0)
         C4 = 40000.0 / (8.0 * 2.0 * PI)
         C5 = 3200.0 / 4160.0
         AA = R + HEIGHT
         RETURN
C*** CHANGE GEODETIC LATITUDE TO GEOCENTRIC ***
         ENTRY ITERL(ALAT)
         SP = ALAT * PI/180.0
         TANSP = TAN(SP)
         TEM = 1.0 + 43.02466 / AA
         IF(ALAT .LT. 90.0) SP = ATAN(TANSP/TEM)
         CLAT = COS(SP)
         SLAT = SIN(SP)
C*** CHANGE IN EARTH 'S RADIUS VERY SMALL FACTOR. ***
         R = 6367.65 + 10.738 * COS(2.0 * SP)
         HEIGHT = AA - R
         RETURN
         END
C
C ***************************************************************************
C
      SUBROUTINE SMOOTH(MAXSC, IPOS)
C
C SUBROUTINE TO SMOOTH AND ELIMINATE NOISE FROM DATA FIELD
C
      LOGICAL*1 FREE(1) /'*'/
      REAL RESID(600), BS(60), SMT(10)
      COMMON /TFIELD/ TEMP(401,600)
      COMMON /CORREC/ CORR(401,600)
      COMMON /SFIELD/ STEMP(401,600)
C
C INPUT DATA
C
C NSMT      = NUMBER OF SMOOTHING OPERATIONS TO BE CARRIED OUT
C             ON GRID FIELD BEFORE OUTPUT
C SMT(I)    = SMOOTHING PARAMETER FOR EACH OPERATION
```

```
C MAXSC     = NUMBER OF COLUMNS IN DATA FIELD
C IPOS      = NUMBER OF ROWS IN DATA FIELD
C TEMP(I,J) = DATA VALUE AT EACH POINT (I, J)
C
      READ(8,FREE) NSMT, (SMT(I),I=1,NSMT)
      WRITE (6,10)
   10 FORMAT ('-', 14X, 'SMOOTHING PARAMETERS')
C*** BEGIN SMOOTHING LOOP ***
      DO 200 KK = 1, NSMT
        SM = SMT(KK) + 1.0
        SMT4 = SMT(KK) / 4.0
        SMT3 = SMT(KK) / 3.0
        SMT2 = SMT(KK) / 2.0
        IPOS2 = IPOS - 1
        MAXSC2 = MAXSC - 1
C*** TWO POINTS SMOOTHING IS USED AT CORNERS OF GRID ***
        CORR(1,1) = SMT2 * (TEMP(2,1) + TEMP(1,2))
        CORR(1,MAXSC) = SMT2 * (TEMP(2,MAXSC) + TEMP(1,MAXSC2))
        CORR(IPOS,1) = SMT2 * (TEMP(IPOS2,1) + TEMP(IPOS,2))
        CORR(IPOS,MAXSC) =SMT2*(TEMP(IPOS2,MAXSC)+TEMP(IPOS,MAXSC2))
C*** THREE POINT SMOOTHING IS USED ON SIDES OF GRID ***
        DO 20 J = 2, MAXSC2
          CORR(1,J) = SMT3 * (TEMP(1,J-1)+TEMP(2,J)+TEMP(1,J+1))
          CORR(IPOS,J) = SMT3 * (TEMP(IPOS,J-1)+TEMP(IPOS2,J)+TEMP(IPOS,J+1))
   20   CONTINUE
C
        DO 30 J = 2, IPOS2
          CORR(I,1) = SMT3 * (TEMP(I+1,1)+TEMP(I,2)+TEMP(I-1,1))
          CORR(I,MAXSC) = SMT3 * (TEMP(I+1,MAXSC)+TEMP(I,MAXSC2)+TEMP(I-1,MAXSC))
   30   CONTINUE
C*** FOUR POINT SMOOTHING IS USED IN INTERIOR OF GRID ***
        DO 40 J = 2, MAXSC2
        DO 40 I = 2, IPOS2
          CORR(I,J) = SMT4*(TEMP(I+1,J)+TEMP(I,J+1)+TEMP(I-1,J)+TEMP(I,J-1))
   40   CONTINUE
C
C SMOOTHING CORRECTION IS APPLIED TO EACH GRID POINT AND THE DIFFERENCES
C BETWEEN ORIGINAL AND  SMOOTHED TEMPERATURE FIELDS IS FOUND
C
        KOUNT = 0
        S = 0.0
        DO 60 J = 1, MAXSC
          SUM = 0.0
          DO 50 I = 1, IPOS
            STEMP(I,J) = (TEMP(I,J) + CORR(I,J)) / SM
            DT = ABS(TEMP(I,J) - STEMP(I,J))
            SUM = SUM + DT
   50     CONTINUE
C*** RESID IS THE MEAN DIFFERENCE BETWEEN FIELDS ***
          RESID(J) = SUM / IPOS
          S = S + RESID(J)
   60   CONTINUE
C
C COMPUTE THE MEAN AND STANDARD DEVIATION OF SMOOTH VS. ORIGINAL FIELDS
C IN ORDER TO DISTINGUISH NOISE, AND OBSERVE THE EFFECTS OF SMOOTHING
C
        SSQ = 0.0
        AVE = S / MAXSC
        DO 70 J = 1, MAXSC
          SSQ = SSQ + (RESID(J) - AVE) * (RESID(J) - AVE)
   70   CONTINUE
        STDEV = SQRT(SSQ/(MAXSC - 1))
        ERRP2 = AVE + STDEV
        ERRM2 = AVE - STDEV
C*** FIRST SMOOTHING USED TO ELEMINATE NOISE ***
        IF (KK .GT. 1) GO TO 120
        DO 110 J = 2, MAXSC2
          IF (RESID(J).GT.ERRM2 .AND. RESID(J).LT. ERRP2) GO TO 90
          KOUNT = KOUNT + 1
          BS(KOUNT) = J
C
C REPLACE BAD SCAN WITH THE AVERAGE OF SCAN-2, AND SCAN-3
C REPLACE PREVIOUS SCAN IN CASE OF CONTAMINATION
```

```
      C REPLACE NEXT SCAN IN CASE OF CONTAMINATION
      C
              DO 80 II = 1, IPOS
              TEMP(II,J - 1) = (STEMP(II,J - 3)+STEMP(II,J-2))/2
              TEMP(II,J)     = (STEMP(II,J - 3)+STEMP(II,J-2))/2
              TEMP(II,J + 1) = (STEMP(II,J - 3)+STEMP(II,J-2))/2
       80     CONTINUE
              J = J+1
              GO TO 110
       90     DO 100 I = 1, IPOS
      100     TEMP(I,J) = STEMP(I,J)
      110   CONTINUE
            GO TO 140
      C
      120   DO 130 J = 1, MAXSC
              DO 130 I = 1, IPOS
      130   TEMP(I,J) = STEMP(I,J)
            WRITE (6,150) KK, SMT(KK)
            GO TO 200
      140   WRITE (6,150) KK, SMT(KK)
      150   FORMAT ('0', 4X, 'SMOOTHING OPERATION NUMBER', I3, 5X,
           &        'SMOOTHING PARAMETER = ', F6.2)
            WRITE (6,160) AVE, STDEV
      160   FORMAT ('0', 4X, 'MEAN OF FIELD DIFFERENCES  =', F8.3, //,
           &        5X, 'STANDARD DEVIATION', 9X, '=', F8.3)
            WRITE (6,170) MAXSC
      170   FORMAT ('0', 4X, 'NUMBER OF SCANS IN WINDOW  =', I8)
            WRITE (6,180) KOUNT
      180   FORMAT ('0',4X,'SCAN LINES REJECTED DUE TO SYNCH PROBLEM = ',I4)
            IF (KOUNT .GT. 0) WRITE (6,190) (BS(J),J=1,KOUNT)
      190   FORMAT ('0',4X,'SCAN LINES REJECTED  =', 5X,10(3F6.0,/,31X))
      200 CONTINUE
          RETURN
          END
      C
      C ***************************************************************
      C
          SUBROUTINE CALIBR(MAXSC, IPOS)
      C
      C THIS SUBROUTINE IS USED TO DETERMINE AVERAGE DATA VALUES OF
      C CALIBRATION LEVELS AND CALIBRATE THE INFRARED DATA OBTAINED
      C FROM NOAA-9.THE ONBOARD COMPUTER IS CALLED A MANIPULATION
      C INFORMATION PROCESSOR OR MIRP FOR SHORT. A DIGITAL COUNT FROM
      C MIRP IS WHAT IS CONVERTED TO AN ANALOG SIGNAL AND TRANSMITTED
      C TO APT STATIONS. THE PROBLEM INVOLVED IN CALIBRATING THE
      C INFRARED DATA IS DETERMINING THE RELATIONSHIP BETWEEN
      C THE U OF A DIGITAL COUNT AND THE MIRP DIGITAL COUNT.
      C
      C INPUT  UNIT 7  = TELEMETRY WEDGE LEVELS DATA
      C                  FROM OUTPUT OF PROGRAM READTAPE.
      C OUTPUT UNIT 9  = WEDGE LEVEL AND CALIBRATION DATA FOR PLOTTING
      C                  PROGRAM PL.WEDGE AND PL.CALIBR.
      C                  (SEE APPENDICES C.5 AND C.6)
      C             10 = CALIBRATION WEDGE LEVELS, MEAN AND STANDARD
      C                  DEVIATION VALUES
      C
      C    DETERMINE RELATION BETWEEN U OF A DIGITAL VALUE AND B.B. TEMP.
      C        THE FIRST 9 VALUES IN UOFA ARE WEDGE LEVELS VALUES
      C        THE LAST 5 VALUES IN UOFA ARE BLACK BODY THERMISTER
      C                  AVERAGES  AND SPACE VIEW.
      C CUTOM = COEFFICIENTS OF THE CUBIC SPLINE FITTING UOFA TO MIRP DATA
      C CMTOU = COEFFICIENTS OF THE CUBIC SPLINE FITTING MIRP TO UOFA DATA
      C TUOFA = DATA VALUES CORRESPONDING TO
      C TMIRP = MIRP DATA VALUES FROM THERMISTERS
      C OBTAIN COEFFICIENTS FROM CUBIC SPLINE Y=F(X) CMIRP = F(UOFA)
      C OBTAIN COEFFICIENTS FROM CUBIC SPLINE Y=F(X) UOFA  = F(CMIRP)
      C
          INTEGER TELM(180), WEDGE
          LOGICAL*1 FREE(1) /'*'/
          REAL MEAN(18), T(52), CA(52), CMR(52), IN, BPAR(4) /4*0.0/,
         &     CUTOM(8,3), CMTOU(8,3), TUOFA(5), TMIRP(5), UOFA(14),
         &     CMIRP(9)/0., 31., 63., 95., 127., 159., 191., 223., 255./
```

```
      COMMON /TFIELD/ TEMP(401,800)
      CALL DESTRY('-9 ')
      CALL DESTRY('-10 ')
      CALL FTNCMD('ASSIGN 9=-9', 11)
      CALL FTNCMD('ASSIGN 10=-10', 13)
C
      READ(7,30) NOBIT
   30 FORMAT(11X,I4)
      WRITE (10,34) NOBIT
   34 FORMAT ('***** FILE',I5,'.WEDGE *****')
      WRITE (10,35) NOBIT
   35 FORMAT ('-',10X,'TELEMETRY WEDGE LEVELS FOR ORBIT NUMBER',I5)
      DO 70 WEDGE = 1, 16
        TD = 0.0
        SUM = 0.0
        READ (7,FREE) (TELM(I),I=1,160)
        DO 40 I = 1, 160
          SUM = SUM + TELM(I)
   40   CONTINUE
        MEAN(WEDGE) = SUM / 160.
        DO 50 K = 1, 160
          TD = TD + (TELM(K) - MEAN(WEDGE)) ** 2
   50   CONTINUE
        STDEV = SQRT(TD/159.0)
C*** OUTPUT CALIBRATION WEDGE LEVELS, MEANS AND STANDARD DEVIATIONS ***
        WRITE (10,60) WEDGE, MEAN(WEDGE), STDEV
   60   FORMAT ('-', 5X, 'WEDGE NUMBER', I3, 4X, 'MEAN', F7.2, 4X,
     &         'STD DEVIATION', F7.2)
   70 CONTINUE
C
C DUMP THEMISTER AVERAGES AND SPACE VIEW INTP PROPER ARRAY POSITIONS IN UOFA.
C
      UOFA(1) = MEAN(9)
      UOFA(14) = MEAN(15)
      K = ,
      DO 80 I = 1, 8
        K = K + 1
   80 UOFA(K) = MEAN(I)
      DO 90 I = 10, 13
   90 UOFA(I) = MEAN(I)
C
C WRITE UOFA, CMIRP, DATA LEVELS AND TEMPERATURES TO UNIT 9 FOR
C USE IN PLOTTING  PROGRAM
C
      WRITE(9,95) NOBIT
   95 FORMAT('***** FILE',I5,'.WED-CAL *****')
      DO 100 I = 1, 9
  100 WRITE (9,110) UOFA(I), CMIRP(I)
  110 FORMAT (2F8.2)
C
      NCAL = 52
      IER = 0
C
C NCAL = NUMBER OF CALIBRATION LEVELS USED
C IER  = ERROR IN IMSL ROUTINE FOR CUBIC SPLINES
C
      CALL ICSICU(UOFA, CMIRP, 9, BPAR, CUTOM, 8, IER)
      CALL ICSICU(CMIRP, UOFA, 9, BPAR, CMTOU, 8, IER)
      K = 0
      DO 120 J = 10, 14
        K = K + 1
        TUOFA(K) = UOFA(J)
  120 CONTINUE
C
C EVALUATE CUBIC SPLINE TO OBTAIN CMIRP COUNT RELATING TO
C RADIOMETER HOUSING TEMPERATURE.
C
      CALL ICSEVU(UOFA, CMIRP, 9, CUTOM, 8, TUOFA, TMIRP, 5, IER)
C
C CONVERT TMIRP TO TEMPERATURE. UOFA RECORDS 8 BIT NUMBERS, FACTOR
C OF 4 IN THE FOLLOWING EQUATIONS IS CONVERTING BACK TO ORIGINAL
C TO 10 BIT NUMBERS.
C
```

```
1081            T1 = 277.018 + 4 * 0.05128 * TMIRP(1)
1082            T2 = 276.750 + 4 * 0.05128 * TMIRP(2)
1083            T3 = 276.862 + 4 * 0.05128 * TMIRP(3)
1084            T4 = 276.548 + 4 * 0.05128 * TMIRP(4)
1085      C
1086      C TAKE AVERAGE OF PRT TEMP'S
1087      C TBB IS THE ACTUAL TEMPERATURE OF THE RADIOMETER HOUSING.
1088      C
1089            TBB = (T1 + T2 + T3 + T4) * 0.25
1090            CALL PLANCK(TBB, QN)
1091      C
1092      C TO ACCOUNT FOR NON-LINEARITIES ASSUME THE RADIANCE
1093      C OF SPACE = -3.384, CMSP = 250.0 (SEE APPENDIX B)
1094      C
1095            SP = -3.384
1096            CMSP = 250.0
1097      C
1098      C FROM N = G*CM + IN
1099      C
1100            G = (SP - QN) / (CMSP - TMIRP(5))
1101            IN = SP - G * CMSP
1102      C
1103      C NOW WORK BACKWARDS - FIND N FOR EVERY TWO-DEGREE INTERVALS
1104      C FROM -73  TO 30 DEGREES C
1105      C
1106            J = 0
1107            DO 130 K = 200, 304, 2
1108              J = J + 1
1109              T(J) = K
1110              CALL PLANCK(T(J), QN)
1111              CMR(J) = (QN - IN) / G
1112        130 CONTINUE
1113      C
1114      C
1115      C EVALUATE CUBIC SPLINE CONVERTING CMR(J) TO UOFA COUNT FOR
1116      C LINEAR INTERPOLATION.
1117      C
1118            CALL ICSEVU(CMIRP, UOFA, 9, CMTOU, 8, CMR, CA, 52, IER)
1119      C
1120            WRITE (9,140)
1121        140 FORMAT ('***** DATA FOR CALIBRATION CURVES BEGIN *****')
1122            DO 150 I = 1, NCAL, 2
1123        150 WRITE (9,110) CA(I), T(I)
1124      C
1125      C CA(I), T(I) = DATA VALUES AND CORRESPONDING TEMPERATURE VALUES
1126      C               FOR EACH CALIBRATION LEVEL (IN PAIRS)
1127      C
1128            WRITE (6,160) (CA(I),T(I),I=1,NCAL,5)
1129        160 FORMAT ('-',14X,'CALIBRATION PARAMETERS',//,5X,'CALIBRATION ',
1130           &  'CURVATURE:     DATA LEVELS     TEMPERATURES (IN DEG K)',//,
1131           &   70(31X,F8.2,14X,F7.2,/))
1132      C
1133      C CALIBRATE EACH GRID POINT
1134      C MAXSC = NUMBER OF COLUMS IN DATA FIELD
1135      C IPOS  = NUMBER OF ROWS IN DATA FIELD
1136      C TEMP(I,J) =  DATA VALUE AT EACH POINT(I,J)
1137      C
1138            DO 190 J = 1, MAXSC
1139            DO 190 I = 1, IPOS
1140      C
1141      C SET VALUES OUTSIDE OF TEMP RANGE TO EXTREME VALUES OF TEMPERATURE
1142      C RANGE. (IMPLEMENTED INFREQUENTLY)
1143      C
1144              IF (TEMP(I,J) .GT. CA(1)) TEMP(I,J) = CA(1)
1145              IF (TEMP(I,J) .LT. CA(NCAL)) TEMP(I,J) = CA(NCAL)
1146              DO 170 K = 1, 51
1147               IF (TEMP(I,J).LT.CA(K) .AND. TEMP(I,J).GE.CA(K+1)) GO TO 180
1148        170   CONTINUE
1149      C*** PERFORM LINEAR INTERPOLATION ***
1150        180   DUM = (TEMP(I,J) - CA(K + 1)) / (CA(K) - CA(K + 1))
1151              DUM2 = - DUM * (T(K) - T(K + 1)) + T(K)
```

```
1152     C*** CONVERT TO DEGREE C ***
1153           TEMP(I,J) = DUM2 - 273.15
1154       190 CONTINUE
1155           RETURN
1156           END
1157     C
1158           SUBROUTINE PLANCK(TEMK, QN)
1159           DIMENSION PHI(60)
1160     C
1161     C THIS SECTION DETERMINES THE RADIANCE OF BLACK BODY WITH
1162     C TEMPERATURE T IN THE 11 MICRON BAND (ALL CONSTANTS WERE
1163     C OBTAINED FROM NOAA-9 WRITE UP, SEE APPENDIX B)
1164     C
1165           DATA PHI /0.0, 0.30603E-4, 0.64563E-4, 0.10523E-3, 0.17057E-3,
1166          &   0.37139E-3, 0.85488E-3, 0.17526E-2, 0.29947E-2, 0.43718E-2,
1167          &   0.58739E-2, 0.67844E-2, 0.77153E-2, 0.84881E-2, 0.91222E-2,
1168          &   0.96298E-2, 0.10022E-1, 0.10310E-1, 0.10525E-1, 0.10708E-1,
1169          &   0.10903E-1, 0.11130E-1, 0.11370E-1, 0.11598E-1, 0.11786E-1,
1170          &   0.11949E-1, 0.12111E-1, 0.12299E-1, 0.12523E-1, 0.12746E-1,
1171          &   0.12926E-1, 0.13022E-1, 0.13039E-1, 0.13030E-1, 0.13047E-1,
1172          &   0.13135E-1, 0.13274E-1, 0.13419E-1, 0.13522E-1, 0.13518E-1,
1173          &   0.13274E-1, 0.12640E-1, 0.11466E-1, 0.97239E-2, 0.78898E-2,
1174          &   0.58031E-2, 0.38225E-2, 0.25039E-2, 0.15835E-2, 0.97002E-3,
1175          &   0.57192E-3, 0.31626E-3, 0.16604E-3, 0.88422E-4, 0.50825E-4,
1176          &   0.27594E-4, 0.13455E-4, 0.52455E-5, 0.53119E-9, 0.0/
1177     C
1178     C INITIAL VALUE OF V IS V = 862.06885
1179     C
1180           V = 862.06885
1181           DV = 2.37812
1182           QN = 0.0
1183     C*** CALCULATE PLANCK FUNCTION ***
1184           DO 10 I = 1, 60
1185             V = V + DV
1186             PLANK = (1.1910659E-5*(V**3)) / (EXP(1.438833*V/TEMK) - 1)
1187             QN = QN + PLANK * PHI(I) * DV
1188        10 CONTINUE
1189           RETURN
1190           END
1191     $ENDFILE
1192     $IF RC>4 $SOURCE PREVIOUS
```

```
1     *************** FILE PL.FIELD.CL ***************
2     $EMPTY -PL.F OK
3     $R *FORTG SPUNCH=-PL.F T=1
4     C
5     C PROGRAM PLOTS EITHER CLOUD TOP TEMPERATURE OR
6     C      REFLECTIVITY CONTOURS IN 2-DIMENSIONS
7     C
8           DIMENSION FIELD(600,400),CVAL(50),THICK(3)
9           COMMON /PASS/ XMIN,YMIN,XMAX,YMAX
10          LOGICAL*1 FREE(1)/'*'/, NAME(12), SQUARE/Z9F/
11          REAL NO/'N    '/
12          INTEGER IOP(8)/1, 1, 0, 1, 1, 0, 1, 1/
13          REAL    VOP(8)/4*0.0, -1.0, 2*0.0, 0.025/
14          CALL FTNCMD('ASSIGN 5=*MSOURCE*', 18)
15          CALL DESTRY('-9FIELD ')
16          CALL SETLIO('9       ','-9FIELD ')
17    C
18    C  READ IN DATA FROM UNIT 13
19    C
20          READ(13) IPOS, MAXSC
21          WRITE(6,FREE) IPOS, MAXSC
22          DO 10 I = 1, MAXSC
23               READ(13) (FIELD(I, J), J = 1, IPOS)
24       10 CONTINUE
25          SCALS = 76.737
26          SCALP = 59.348
27          XSIZE = MAXSC/SCALS
28          YSIZE = IPOS/SCALP
29          XMIN=0.
30          XMAX=XSIZE
31          YMIN=0.
32          YMAX=YSIZE
33    C
34    C  CALCULATE SCALING FACTOR, HEIGHT OF CONTOUR VALUE
35    C  AND PAGESIZE SCALE (21.5 X 13.5 CM)
36    C  (THE MAXIMUM WIDTH OF CALCOMP PLOTTER IS 76.0 CM)
37    C
38          FAC = 76.0/YSIZE
39          IF (FAC .GT. 50.0) FAC = 50.0
40          VOP(8) = 0.80/FAC
41          HI = 0.85/FAC
42          CALMS1 = AMIN1(21.50/(YSIZE*FAC),13.50/(XSIZE*FAC))
43          CALMS2 = AMIN1(21.50/(YSIZE*FAC),27.00/(XSIZE*FAC))
44    C
45          WRITE (6, 35) XSIZE, YSIZE, FAC, CALMS1, CALMS2
46       35 FORMAT (' THE PLOT IS',F8.2,' X',F8.2,' CM, FACTOR=',F8.2,
47         &             ' PAGESIZE SCALE=',2F7.4 )
48          WRITE (6,20)
49       20 FORMAT('ENTER MIN, MAX AND INTERVAL CONTOUR VALUES')
50          READ (5,FREE) AMIN, AMAX, CINT
51          WRITE (6,25)
52       25 FORMAT('ENTER THICK CONTOUR VALUES (3 VALUES)')
53          READ (5,FREE) THICK1,THICK2,THICK3
54          THICK(1) = THICK1
55          THICK(2) = THICK2
56          THICK(3) = THICK3
57    C
58          CALL PLOTS
59          CALL XLIMIT(200.0)
60          CALL FACTOR(FAC)
61          CALL PLOT(0.2, 0.2, -3)
62          NC = IFIX((AMAX-AMIN)/CINT)+1
63          CSET = AMIN
64          DO 30 I = 1, NC
65               CVAL(I) = CSET
66               CSET = CSET+CINT
67       30 CONTINUE
68          CALL CONTUR (XSIZE,YSIZE,FIELD,600,MAXSC,IPOS,
69         &             CVAL,NC,IOP,VOP,THICK)
70    C
71    C PLOT CITY LOCATIONS FROM UNIT 16
72    C
```

```
      40  READ (16, FREE, END=54) MM
          DO 50 I = 1, MM
               READ (16, 45) XP, YP, (NAME(J),J = 1,12)
      45       FORMAT(2F7.2,1X,12A1)
               XP = XP/SCALS
               YP = YP/SCALP
               IF (XP.LT.0.0 .OR. XP.GT.XSIZE) GO TO 50
               IF (YP.LT.0.0 .OR. YP.GT.YSIZE) GO TO 50
               CALL PALPHA ('GREEK.1 ', 0)
               CALL PSYM (XP, YP, HI, SQUARE,-90.0, 1)
C***           CALL PALPHA ('SANSERIF.2 ', 0)
C***           CALL PSYM (XP, YP-HI, HI, NAME,-90.0, 12)
      50  CONTINUE
          GO TO 40
C
      54  WRITE (6, 55)
      55  FORMAT ('PLOT LATITUDE - LONGITUDE LINES ? (Y/N)')
          READ (5, 56) ANS2
      56  FORMAT (A4)
          IF (ANS2 .EQ. NO) GO TO 80
C
C DRAW LAT-LON LINES FROM UNIT 11
C
      60  READ (11, 65, END=80) NPTS, MZERO, LATLON
      65  FORMAT (3I4)
          DO 90 I = 1, NPTS
               READ (11, FREE) XL, YL
               XL = XL/SCALS
               YL = YL/SCALP
               IF (I .EQ. 1) CALL PLOT2 (XL, YL, 3)
               IF (I .NE. 1) CALL PLOT2 (XL, YL, 2)
      90  CONTINUE
          GO TO 60
C
C  TERMINATING PLOT
C
      80  CALL PLOT (0.0, 0.0, 999)
          STOP
          END
C
          SUBROUTINE CONTUR(XSIZE,YSIZE,ZP,IDIMX,M,N,
     &                      CVALS,NC,IOP,VOP,THICK)
C
C       MODIFIED BY CHI NGUYEN ON JAN. 1987 TO FIT WITH
C       THE SATELLITE DATA FOR JAN 28,1977 VERSION.
C
          COMMON/ COM031/ TOUR,IRP,JRP,ISP,JSP,NX,NY,EXPN,CONHT
          COMMON/ COM033/ BUF(40003),IPBUF,NDEC,SCLX,SCLY,ZM,FWRITE
          LOGICAL FWRITE
          DATA TOL/1.0E-10/
          VAL = VALL
          DIMENSION CVALS(1),IOP(1),VOP(1),ZP(IDIMX,1),THICK(1)
          ZMAX = -1.0E75
          ZMIN = 1.0E75
          DO 40 J = 1,N
          DO 42 I = 1,M
               IF(ZP(I,J) .LT. ZMIN) ZMIN = ZP(I,J)
               IF(ZP(I,J) .GT. ZMAX) ZMAX = ZP(I,J)
      42  CONTINUE
      40  CONTINUE
          ZMAXK = ZMAX
          ZMINK = ZMIN
          NS = NC+1
          CI = (ZMAX-ZMIN)/NS*0.99999
      44  NS = NS-1
          IF(NS .EQ. 0) GO TO 150
          ZMAX = ZMAX-CI
          IVC = NC-NS+1
          IF (IOP(2).NE.1) GO TO 47
          ZMAX = CVALS(IVC)
          IF(ZMAX.LE.ZMAXK .AND. ZMAX.GE.ZMINK) GO TO 48
```

```
144           WRITE(6,905) ZMAX
145     905   FORMAT(23HO-WARNING-CONTOUR VALUE,G9.3,14HDOES NOT EXIST)
146           GO TO 44
147     47    CVALS(IVC) = ZMAX
148           GO TO 49
149     48    IPEN=1
150           IF (ZMAX.GE.(THICK(1)-TOL).AND.ZMAX.LE.(THICK(1)-TOL))IPEN=2
151           IF (ZMAX.GE.(THICK(2)-TOL).AND.ZMAX.LE.(THICK(2)-TOL))IPEN=3
152           IF (ZMAX.GE.(THICK(3)-TOL).AND.ZMAX.LE.(THICK(3)-TOL))IPEN=4
153           CALL NEWPEN(IPEN)
154     49    CALL AUX099 (XSIZE,YSIZE,ZP,IDIMX,M,N,ZMAX,IOP,VOP)
155           GO TO 44
156     150   IF(IOP(3).NE.1 .OR. IPBUF.EQ.3) GO TO 60
157     60    IF(IOP(1).NE.1) GO TO 99
158           CALL NEWPEN(1)
159           CALL PLOT (0.0,0.0,3)
160           CALL PLOT (XSIZE,0.0,2)
161           CALL PLOT (XSIZE,YSIZE,2)
162           CALL PLOT (0.0,YSIZE,2)
163           CALL PLOT (0.0,0.0,2)
164     99    RETURN
165           END
166     C
167           SUBROUTINE AUX099(XSIZE,YSIZE,ZP,IDIMX,NXX,NYY,TOURR,IOP,VOP)
168     C
169     C     C O N T O U R  P L O T T I N G  O F  A  G R I D
170     C
171     C     XP = ARRAY OF X VALUES - SINGLE DIMENSION
172     C     YP = ARRAY OF Y VALUES - SINGLE DIMENION,
173     C     ZP = DOUBLE DIMENSION ARRAY(IDIMX BY .....) CONTAINING THE
174     C          Z VALUES (Z = F(X, Y)) TO BE CONTOURED.
175     C     NX, NY, = THE CONTOURING GRID IS NX LONG BY NY WIDE .
176     C     I. E. THE GRID MAY BE SMALLER THAN THE ARRAY WHICH CONTAINS IT.
177     C     'VAL' IS AN INDICATOR FOR PLOTTING NUMBERS ON THE LINES.
178     C     IF ABS(VAL) .LT. 1.0E-75 THEN NO NUMBERS ARE PLOTTED
179     C     IF NEGATIVE NEGATIVE VALUES ON THE GRID ARE NOT PLOTTED AT ALL.
180     C
181     C     CVAL IS THE VALUE OF THE NUMBER TO BE PLACED ON THE CONTOUR.
182     C     NDC - NUMBER OF DECIMAL PLACES OF NUMBERS ON CONTOURS
183     C     IF NDC = -1 THEN NUMBERS WILL BE PLOTTED WITHOUT DECIMAL
184     C
185           DIMENSION XP(600), YP(600), ZP(IDIMX ,1) ,IOP(1), VOP(1)
186           COMMON/ COM031/ TOUR,IRP,JRP,ISP,JSP,NX,NY,EXPN,CONHT
187           COMMON/ COM032/ IPEN,VAL,XVAL,SEP,PLACE,POS,DSEP,DSEP2,SEPSQ
188           COMMON/ COM033/ BUF(40003),IPBUF,NDEC,SCLX,SCLY,ZM,FWRITE,INIT
189          & ,CENTR,SMOOT
190           LOGICAL FWRITE,INIT ,CENTR,SMOOT, PLACE, POS
191           INIT = .FALSE.
192           GAP = CONHT
193           ZM = 999.0
194           IPBUF = 3
195           FWRITE = .FALSE.
196           IF(IOP(3) .EQ. 1) FWRITE = .TRUE.
197           VALL = 1.0E-76
198           IF(IOP(4) .EQ. 2) VALL = 3.0
199           IF(IOP(4) .EQ. 3) VALL = VOP(4)
200           CENTR = .FALSE.
201           IF(IOP(4) .NE. 1) GO TO 3
202           CENTR = .TRUE.
203           VALL = 1.0E-75
204     3     NDC = 2
205           IF(IOP(5) .EQ. 1) NDC = VOP(5)
206           IF(NDC .GT. 5) NDC = 5
207           IF(IOP(6) .EQ. 1) VALL = -VALL
208           CVAL = TOURR
209           SMOOT = .FALSE.
210           IF(IOP(7) .EQ. 1) SMOOT = .TRUE.
211           CONHT = 0.07
212           IF(IOP(8) .EQ. 1) CONHT = VOP(8)
213           DO 50 I = 1, NXX
214                XP(I) = I-1
215     50    CONTINUE
```

```
      DO 52 J = 1, NYY
           YP(J) = J-1
52    CONTINUE
      SCLX = XSIZE/(NXX-1)
      SCLY = YSIZE/(NYY-1)
      VAL = VALL
      TOUR = TOURR
      NX = NXX
      NY = NYY
C*** INITIALIZE FOR PLACING NUMBERS ON THE CONTOURS ***
      PLACE = .FALSE.
      SEP = ABS(VAL)
      SEPSQ = SEP**2
      IF (SEP .LT. 1.0E-75) GO TO 195
      EXPN = 999.0
      NDEC = NDC
      PLACE = .TRUE.
      TEMP = AMAX1(0.0,FLOAT(NDEC))
      IF(ABS(CVAL)+.000001 .LT. 10.**(-TEMP)) GO TO 190
C*** CVAL IS THE NUMBER TO BE PLACED ON THE CONTOURS ***
      XVAL = CVAL
C*** CALCULATE THE NUMBER OF DIGITS IN THE NUMBER ***
      TEMP = INT(ALOG10(ABS(CVAL))) + 1.0
C*** ADD PLACES FOR DECIMAL PT. AND DIGITS AFTER DECIMAL PT. ***
      TEMP = TEMP+1.0+NDEC
C*** IF MORE THAN 6 DIGITS USE THE OTHER METHOD ***
      IF(TEMP .GT. 6.0) GO TO 190
      TEMP2 = TEMP
      IF(TEMP .GT. 1.0) GO TO 191
      TEMP2 = NDEC+2
C*** THE WIDTH OF THE NUMBER IN PLOT INCHES ***
191   DSEP = TEMP2*CONHT
      IF (CVAL .GT. 0.0) GO TO 195
      GO TO 1935
C*** WE PLOT THE NUMBER IN EXPONENTIAL FORM ***
190   CONTINUE
      XVAL = 0.0
      DSEP = CONHT
      IF (CVAL .EQ. 0.0) GO TO 195
      TEMP = ALOG10(ABS(CVAL))
      EXPN = FLOAT(INT(TEMP))
      TEMP = TEMP-EXPN
      IF (TEMP.GE.0.0) GO TO 189
      TEMP = TEMP+1.0
      EXPN = EXPN-1.0
189   XVAL = 10.0 ** TEMP
      NDEC = 2
      ITEMP = NDEC+4
      IF(EXPN .LT. 0.0) ITEMP = ITEMP+1
      IF(ABS(EXPN).GE.10.0) ITEMP = ITEMP+1
      DSEP = ITEMP*CONHT
      IF (CVAL .GT. 0.0) GO TO 195
193   XVAL = -XVAL
1935  DSEP = DSEP + CONHT
195   CONTINUE
      DSEP2 = DSEP+GAP
      POS = .FALSE.
      IF (VAL .GE. 0.0) POS = .TRUE.
C
C     THIS SUBROUTINE INITIALIZES AND CONDUCTS THE SEARCH
C*** F I R S T  C L E A R  A L L  S W I T C H E S ***
      ITEMP = AUX098(NX, NY, -1)
C*** S E A R C H  F O R  A  B O T T O M  E D G E  C O N T O U R ***
      JRP = 1
      JSP = 1
      DO 1 I = 2, NX
           IF (ZP(I, 1) .LE. TOUR) GO TO 1
           J = I - 1
           IF (ZP(J, 1) .GT. TOUR) GO TO 1
           IRP = I
           ISP = J
           CALL AUX098 (IDIMX, XP, YP, ZP)
1     CONTINUE
```

```
C*** S E A R C H  T H E  R I G H T  E D G E ***
      ISP = NX
      IRP = NX
      DO 15 I = 2, NY
           IF (ZP(NX, I) .LE. TOUR) GO TO 15
           J = I - 1
           IF (ZP(NX, J) .GT. TOUR) GO TO 15
           JSP = J
           JRP = I
           CALL AUX096 (IDIMX, XP, YP, ZP)
 15   CONTINUE
C*** S E A R C H  T H E  T O P  E D G E ***
      ITEMP = NX - 1
      JRP = NY
      JSP = NY
      DO 2 I = 1, ITEMP
           II = NX - I
           IF (ZP(II, NY) .LE. TOUR) GO TO 2
           J = II + 1
           IF (ZP(J, NY) .GT. TOUR) GO TO 2
           IRP = II
           ISP = J
           CALL AUX096 (IDIMX, XP, YP, ZP)
 2    CONTINUE
C*** S E A R C H  F O R  A  L E F T  E D G E  C O N T O U R ***
      JTEMP = NY - 1
      IRP = 1
      ISP = 1
      DO 25 I = 1, JTEMP
           II = NY - I
           IF (ZP(1, II) .LE. TOUR) GO TO 25
           J = II + 1
           IF (ZP(1, J) .GT. TOUR) GO TO 25
           JRP = II
           JSP = J
           CALL AUX096 (IDIMX, XP, YP, ZP)
 25   CONTINUE
C*** S E A R C H  T H E  R E S T  O F  T H E  A R R A Y ***
      DO 30 I = 2, JTEMP
      DO 26 J = 2, NX
           JJ = J - 1
           IF (ZP(J, I) .LE. TOUR)GO TO 26
           IF (ZP(JJ, I) .GT. TOUR) GO TO 26
           IF (AUX098(J, I, 0) .EQ. 1) GO TO 26
           IRP = J
           ISP = JJ
           JRP = I
           JSP = I
           CALL AUX096 (IDIMX, XP, YP, ZP)
 26   CONTINUE
 30   CONTINUE
      IPEN = 3
C*** DUMMY CALL TO GET BUFFER PLOTTED OR WRITTEN ***
      CALL AUX097 (0.0,0.0,1.0,0.0,0.0,0.0)
      INIT = .FALSE.
      RETURN
      END
C
      SUBROUTINE AUX096 (NNX, XP, YP, ZP)
      COMMON/ COM031/ TOUR,IIRP,JJRP,IISP,JJSP,NX,NY,CONHT
      COMMON/ COM032/ IPEN,VAL,XVAL,SEP,PLACE,POS,DSEP,DSEP2
C
C   TOUR = THE CONTOUR VALUE
C   IRP, JRP  = REFERENCE POINT
C   ISP, JSP  = POINT WE ARE CONTOURING TO
C
     DIMENSION XP(2), YP(2), ZP(NNX, 2)
      DIMENSION IT(9), JT(9)
      DATA IT / 0, 1, 1, 0, 9, 0, -1, -1, 0 /
      DATA JT / -1, 0, 0, -1, 9, 1, 0, 0, 1 /
      LOGICAL DTEST(9)
      DATA DTEST / .FALSE., .TRUE., .FALSE., .TRUE., .FALSE.,
     &  .TRUE., .FALSE., .TRUE., .FALSE.                    /
```

```
362           IRP = IIRP
363           JRP = JJRP
364           ISP = IISP
365           JSP = JJSP
366           IPEN = +3
367           GO TO 5
368     C*** S W I T C H   P O I N T S ***
369      95   IRP = IN
370           JRP = JN
371      5    CONTINUE
372           CALL AUX097 (XP(IRP), YP(JRP), ZP(IRP, JRP),
373          & XP(ISP), YP(JSP), ZP(ISP, JSP))
374     C*** FIND THE NEXT POINT TO CHECK THROUGH A TABLE LOOKUP ***
375           LOCATE = 3*(JRP - JSP) + IRP - ISP + 5
376     C*** IN, JN = THE NEW POINT ***
377           IN = ISP + IT(LOCATE)
378           JN = JSP + JT(LOCATE)
379     C*** T E S T   F O R   A N   E D G E ***
380           IF (IN.GT.NX .OR. IN.LT.1 .OR. JN.GT.NY .OR. JN.LT.1) RETURN
381     C*** I T   M A Y   B E   A   D I A G O N A L ***
382           IF (LOCATE .NE. 6) GO TO 60
383           IF (AUX098(IRP, JRP, +1) .EQ. 1) RETURN
384      60   IF (DTEST(LOCATE)) GO TO 97
385     C*** DETERMINE IF IT IS A CONTOUR OR SWITCH POINTS ***
386           ZPP = ZP(IN, JN)
387           IF (ZPP .GT. TOUR) GO TO 95
388           ISP = IN
389           JSP = JN
390           GO TO 5
391     C*** D I A G O N A L S   G E T   S P E C I A L   T R E A T M E N T ***
392     C*** CALCULATE THE HEIGHT AND LOCATION OF THE MIDPOINT ***
393      97   CONTINUE
394           VX = (XP(IRP) + XP(IN))*0.5
395           VY = (YP(JRP) + YP(JN))*0.5
396           LOCATE = 3*(JRP - JN) + IRP - IN + 5
397           INN = IN + IT(LOCATE)
398           JNN = JN + JT(LOCATE)
399           HTM = (ZP(IRP,JRP) + ZP(ISP,JSP) + ZP(IN,JN) + ZP(INN,JNN))/4.0
400           IF (HTM .GT. TOUR) GO TO 975
401     C*** M I D P O I N T   L E S S   T H A N   C O N T O U R ***
402           CALL AUX097 (XP(IRP), YP(JRP), ZP(IRP, JRP), VX, VY, HTM)
403           IF (ZP(INN, JNN) .GT. TOUR) GO TO 9715
404     C*** T U R N O F F   S H A R P   R I G H T ***
405           ISP = INN
406           JSP = JNN
407           GO TO 5
408      9715 CONTINUE
409           CALL AUX097 (XP(INN), YP(JNN), ZP(INN, JNN), VX, VY, HTM)
410           IF (ZP(IN, JN) .GT. TOUR) GO TO 9716
411     C*** C O N T I N U E   S T R A I G H T   T H R O U G H ***
412           IRP = INN
413           JRP = JNN
414           ISP = IN
415           JSP = JN
416           GO TO 5
417     C*** W I D E   L E F T   T U R N ***
418      9716 CONTINUE
419           CALL AUX097 (XP(IN), YP(JN), ZP(IN, JN), VX, VY, HTM)
420           GO TO 95
421     C*** M I D P O I N T   G R E A T E R   T H A N   C O N T O U R ***
422      975  CONTINUE
423           CALL AUX097 (VX, VY, HTM, XP(ISP), YP(JSP), ZP(ISP, JSP))
424     C*** I T   M A Y   B E   A   S H A R P   L E F T   T U R N ***
425           IF (ZP(IN, JN) .GT. TOUR) GO TO 95
426           CALL AUX097 (VX, VY, HTM, XP(IN), YP(JN), ZP(IN, JN))
427           IF (ZP(INN, JNN) .GT. TOUR) GO TO 976
428     C*** W I D E   R I G H T   T U R N ***
429           CALL AUX097 (VX, VY, HTM, XP(INN), YP(JNN), ZP(INN, JNN))
430           ISP = INN
431           JSP = JNN
432           GO TO 5
433     C*** C O N T I N U E   S T R A I G H T   T H R O U G H ***
434      976  ISP = IN
```

```
435           JSP = JN
436           IRP = INN
437           JRP = JNN
438           GO TO 5
439           END
440     C
441           FUNCTION AUX098 (NI, NJ, IND)
442     C
443     C              - C A U T I O N -
444     C       THIS SUBROUTINE HAS THE TWO MACHINE DEPENDANT
445     C     FUNCTION SUBPROGRAMS 'AND' AND 'OR' .    IT MAY NOT
446     C     RUN PROPERLY ON MACHINES OTHER THAN THE IBM 360/67.
447     C
448           DIMENSION IARRAY(40000), IMASK(32)
449           DATA IMASK /Z1, Z2, Z4, Z8, Z10, Z20, Z40, Z80,
450          & Z100, Z200, Z400, Z800, Z1000, Z2000, Z4000,
451          & Z8000, Z10000, Z20000, Z40000, Z80000,
452          & Z100000, Z200000, Z400000, Z800000,
453          & Z1000000, Z2000000, Z4000000, Z8000000,
454          & Z10000000, Z20000000, Z40000000, Z80000000 /
455           EQUIVALENCE (TEMP,ITEMP)
456     C
457     C   IF IND =   -1 THEN CLEAR THE ARRAY
458     C          0 THEN CHECK THE FLAG ONLY
459     C          +1 THEN CHECK THE FLAG AND SET IT TO 1
460     C
461           IF (IND .NE. (-1)) GO TO 1
462           DO 100 I = 1, 40000
463      100      IARRAY(I) = 0
464           NN = NI
465           AUX098 = 0
466           RETURN
467      1    CONTINUE
468           IPOS = (NJ - 1) * NN + NI
469           IWORD = IPOS / 32
470           IBIT = IPOS - IWORD * 32  + 1
471           IWORD = IWORD + 1
472           TEMP = AND(IARRAY(IWORD), IMASK(IBIT))
473           AUX098 = 1
474           IF (IND .EQ. 0) GO TO 200
475           IF (ITEMP .NE. 0) RETURN
476           AUX098 = 0
477           TEMP = OR(IARRAY(IWORD), IMASK(IBIT))
478           IARRAY(IWORD) = ITEMP
479           RETURN
480      200  CONTINUE
481           IF (ITEMP .EQ. 0) AUX098 = 0
482           RETURN
483           END
484     C
485           SUBROUTINE AUX097 (XRR, YRR, HR, XSS, YSS, HS)
486           COMMON / COM032/ IPEN,VAL,XVAL,SEP,PLACE,POS,DSEP,DSEP2,SEPSQ
487           LOGICAL PLACE, POS,NUMIN
488           COMMON/ COM031/ TOUR,IRP,JRP,ISP,JSP,NX,NY,EXPN,CONHT
489           COMMON/ COM033/ BUF(40003),IPBUF,NDEC,SCLX,SCLY,ZM,FWRITE,INIT
490          & ,CENTR,SMOOT
491           DIMENSION XPLTN(2), YPLTN(2), BUF2(40000)
492           LOGICAL FWRITE, INIT, CENTR, SMOOT
493           EQUIVALENCE (BUF(4), BUF2(1))
494           DATA NUMIN/ .FALSE.
495           IF (POS .OR. HS .NE.1.0E35) GO TO 100
496           IPEN = +3
497           RETURN
498      100  CONTINUE
499           XR = XRR
500           YR = YRR
501           XS = XSS
502           YS = YSS
503     C***.LINEAR INTERPOLATION FOR THE CONTOUR ***
504           DDX = XR - XS
505           DDY = YR - YS
506           FRAC = (HR - TOUR) / (HR - HS)
507           XPLOT = XR - FRAC*DDX
```

```
508             YPLOT = YR - FRAC*DDY
509             IF(IPEN.EQ.3 .AND. INIT) GO TO 20
510       10    IPBUF = IPBUF+2
511             IF(IPBUF .LE. 40001) GO TO 30
512             WRITE(6,103)
513       103   FORMAT('ONO. OF POINTS IN CONTOUR EXCEEDS 40000')
514             RETURN
515       30    BUF(IPBUF-1) = XPLOT
516             BUF(IPBUF) = YPLOT
517             INIT = .TRUE.
518             IPEN = 2
519             OTOUR = TOUR
520             OXVAL = XVAL
521             RETURN
522       20    BUF(1) = TOUR
523             BUF(2) = XVAL
524             ICSM = (IPBUF-3)/2
525             BUF(3) = ICSM
526             IF(FWRITE) WRITE(8) IPBUF,(BUF(I),BUF(I+1),I = 1,IPBUF,2)
527             N = IPBUF-3
528             IPBUF = 3
529             NH = N/2
530             IC = 3
531       C*** FOLLOWING 2 STATEMENTS NECESSARY TO AVOID ZERODIVIDE IN SMOOTH RTN. ***
532             DO 1002 I = 1,N,2
533                  XPLOT2 = BUF2(I)
534                  YPLOT2 = BUF2(I+1)
535       C*** CALL TRANSFORMATION ROUTINE IF USER SUPPLIES IT ***
536       C*** OTHERWISE EXECUTE DUMMY ROUTINE ***
537                  CALL CONTTR (XPLOT2, YPLOT2)
538       C*** PATCH TO PLOT NUMBERS ON THE CONTOURS - WJC ***
539                  IF (.NOT. PLACE) GO TO 1000
540       C*** START OF A NEW CONTOUR ... ***
541                  IF (I .EQ. 1) GO TO 900
542                  DXNUM = SCLX*(XPLOT2-XST)
543                  DYNUM = SCLY*(YPLOT2-YST)
544                  SQ1 = (DXNUM)**2+(DYNUM)**2
545       C*** ARE WE ALREADY SPACING FOR THE LABEL ... ***
546                  IF (NUMIN) GO TO 950
547       C*** SHOULD WE PLOT THE LABEL ... ***
548       C*** ARE WE PLOTTING CENTERED NUMBERS ON CONTOURS ***
549                  IF(CENTR) GO TO 910
550       C*** ARE WE 'SEP' UNITS FROM THE LAST LABEL PLOTTED ***
551                  IF(SQ1 .LT. SEPSQ) GO TO 1000
552       C*** OR 'SEP' UNITS FROM THE FIRST NUMBER PLOTTED ***
553                  DISTX = SCLX*(XPLOT2-XFST)
554                  DISTY = SCLY*(YPLOT2-YFST)
555                  IF((DISTX**2+DISTY**2) .LT. SEPSQ) GO TO 1000
556               GO TO 940
557        910    IF(I .LT. NH) GO TO 1000
558       C*** THE FIRST NUMBER ON EACH CONTOUR IS SAVED FOR CHECKING ***
559                  NUMIN = .TRUE.
560               GO TO 942
561        900    CONTINUE
562                  XFST = XPLOT2
563                  YFST = YPLOT2
564       C*** START A NEW NUMBER ***
565        940    CONTINUE
566                  IF(.NOT.CENTR) NUMIN = .TRUE.
567        942       XST = XPLOT2
568                  YST = YPLOT2
569                  IF(SMOOT) ICSM = -25
570               GO TO 1000
571       C*** IS THE SPACE BIG ENOUGH ***
572        950    CONTINUE
573                  SQ2 = SQRT(SQ1)
574                  IF(CENTR) GO TO 952
575                  IF(I .LT. (N-1)) GO TO 952
576       C*** THIS PATH PREVENTS GAPS AT END OF CONTOUR LINE ***
577                  IC = 2
578               GO TO 1001
579        952       IF(SQ2 .LT. DSEP2) GO TO 1002
```

```
                SINANG = DYNUM/SQ2
                COSANG = DXNUM/SQ2
                ISW = 1
                ANGNUM = 180.0/3.14159*ARSIN(SINANG)
                IF(DXNUM .GT. 0.0) GO TO 110
                ISW = 2
                ANGNUM = -ANGNUM
                COSANG = -COSANG
                SINANG = -SINANG
  110           XPLTN(ISW) = XST *SCLX
                ISW3 = 3-ISW
                XPLTN(ISW3) = XPLOT2 *SCLX
                YPLTN(ISW) = YST *SCLY
                YPLTN(ISW3) = YPLOT2 *SCLY
                GAP = (SQ2-DSEP)/2.0
                IF (XVAL .LT. 0.0) GAP = GAP+(CONHT/2.0)
                XN = XPLTN(1)+GAP*COSANG+CONHT/2.0*SINANG
                YN = YPLTN(1)+GAP*SINANG-CONHT/2.0*COSANG
                CALL NUMBER (XN, YN, CONHT, XVAL, ANGNUM, NDEC)
                IF(EXPN .EQ. 999.0) GO TO 976
                CALL SYMBOL (ZM, ZM, CONHT, 1HE, ANGNUM, 1)
                CALL NUMBER (ZM, ZM, CONHT, EXPN, ANGNUM, -1)
  976           IC = 3
                CALL PLOT (XPLTN(ISW3), YPLTN(ISW3), IC)
  995           NUMIN = .FALSE.
                NH = N
  1000          IF(.NOT.SMOOT) GO TO 1001
                XPLTN(1) = SCLX*XPLOT2
                YPLTN(1) = SCLY*YPLOT2
                IF(IC.NE.2) GO TO 1004
                IF(I .EQ. (N-1)) ICSM = -25
C*** FOLLOWING LINES PREVENTS PROBLEM WITH SMOOTH WITH IDENTICAL POINTS ***
  1005          ABTX = ABS((XPLOT2-OSMX)*SCLX)
                ABTY = ABS((YPLOT2-OSMY)*SCLY)
                IF(ABTX .LT. .0020.OR.ABTY .LT. .0020) GO TO 2001
                IF (ICSMO.EQ.0 .AND. ICSM.EQ.25) GO TO 1006
  2000          CALL SMOOTH (XPLTN(1), YPLTN(1), ICSM)
                OSMX = XPLOT2
                OSMY = YPLOT2
              GO TO 2002
  2001          CALL PLOT (SCLX*OSMX, SCLY*OSMY, 2)
                CALL PLOT (XPLTN(1), YPLTN(1), 2)
                OSMX = XPLOT2
                OSMY = YPLOT2
                ICSM = 0
              GO TO 2000
  2002          ICSMO = ICSM
                ICSM = -2
              GO TO 1006
  1004          ICSM = 0
                CALL PLOT (XPLTN(1), YPLTN(1), 3)
              GO TO 2000
  1001          CALL PLOT (SCLX*XPLOT2 ,SCLY*YPLOT2, IC)
  1006          IC = +2
  1002      CONTINUE
            IF(IPEN .NE. 3) GO TO 1007
            IPBUF = 5
            GO TO 30
  1007      IPEN = +2
  99        RETURN
            END
C
            SUBROUTINE CONTTR (XPLOT2, YPLOT2)
            RETURN
            END
C
            SUBROUTINE PLOT2(XT,YT,IC)
            COMMON /PASS/ XMIN,YMIN,XMAX,YMAX
            LOGICAL*1 INIT/.FALSE./,IN
            X=XT
            Y=YT
            IF(INIT) GO TO 10
```

```
652             CALL WHERE(XOLD,YOLD,FCT)
653             INIT=.TRUE.
654          10 CONTINUE
655             XKEEP=X
656             YKEEP=Y
657             CALL CLIP$(XOLD,YOLD,X,Y,XMIN,XMAX,YMIN,YMAX,IN)
658             IF (.NOT.IN) GO TO 20
659             CALL PLOT(XOLD,YOLD,3)
660             CALL PLOT(X,Y,IC)
661          20 XOLD=XKEEP
662             YOLD=YKEEP
663             RETURN
664             END
665       $ENDFILE
666       $IF RC>4 $SOURCE PREVIOUS
```

```
1     ************** FILE PL.3FIELDF ***************
2     $EMPTY -PL.3F OK
3     $R *FORTG SPUNCH=-PL.3F T=2
4     C
5     C PROGRAM PLOTS CLOUD TOP TEMPERATURES IN 3-DIMENSIONS.
6     C
7           DIMENSION FIELD1(400, 600), FIELD(300, 400)
8           LOGICAL*1 FREE(1)/'*'/
9           CALL FTNCMD('ASSIGN 5=*MSOURCE*', 18)
10          CALL DESTRY('-93FIELD ')
11          CALL SETLIO('9       ','-93FIELD ')
12    C
13    C   READ IN DATA FROM UNIT 13
14    C
15          READ(13) IPO, MA
16          WRITE(6,FREE) IPO, MA
17          WRITE(6, 5)
18       5  FORMAT('ENTER IPOBGN, IPOEND, ISKIP, MAXBGN, MAXEND, MSKIP')
19          READ(5,FREE) IPOBGN, IPOEND, ISKIP, MAXBGN, MAXEND, MSKIP
20          IF (IPOEND.GT.IPO .OR. MAXEND.GT.MA) GO TO 99
21    C
22          DO 10 I = 1, MA
23              READ(13) (FIELD1(I, J), J = 1, IPO)
24       10 CONTINUE
25          TEMMIN =  100.0
26          TEMMAX = -100.0
27          II = 1
28          DO 30 I = MAXBGN, MAXEND, MSKIP
29          JJ = 1
30          DO 20 J = IPOBGN, IPOEND, ISKIP
31              FIELD(II, JJ) = FIELD1(I, J)
32              TEMMIN = AMIN1(FIELD(II, JJ), TEMMIN)
33              TEMMAX = AMAX1(FIELD(II, JJ), TEMMAX)
34            JJ = JJ +1
35       20 CONTINUE
36            II = II + 1
37       30 CONTINUE
38          IPOS = JJ - 1
39          MAXSC = II - 1
40    C
41          WRITE(6,35)
42       35 FORMAT('ENTER XLOMIN, XLOMAX, YLAMIN, YLAMAX')
43          READ(5,FREE) XLOMIN, XLOMAX, YLAMIN, YLAMAX
44          ZMAX = (AINT(TEMMAX/10.0)+1.0)*10.0
45          ZMIN = (AINT(TEMMIN/10.0)-1.0)*10.0
46          ZSTP = 10.0
47          WRITE(6,37) IPOS, MAXSC, TEMMIN, TEMMAX, ZMIN, ZMAX
48       37 FORMAT('IPOS=', I3,'  MAXSC=',I3 ,'  TEMMIN=', F6.2,
49         & '  TEMMAX=', F5.2,'  ZMIN=', F6.2,'  ZMAX=', F6.2)
50    C
51          CALL DSPDEV('PLOTTER ')
52          CALL PAGE(11.0, 8.5)
53          CALL NOBRDR
54          XSIZE = 8.50
55          YSIZE = 5.50
56          CALL AREA2D(XSIZE, YSIZE)
57          CALL SCMPLX
58          CALL INTAXS
59          CALL ZAXANG(-90.0)
60          CALL HEIGHT(0.12)
61          CALL XTICKS(2)
62          CALL YTICKS(2)
63          CALL ZTICKS(2)
64          CALL X3NAME('LONGITUDE (IN DEGREE W)$', 100)
65          CALL Y3NAME('LATITUDE (IN DEGREE N)$', 100)
66          CALL Z3NAME('TEMPERATURE (IN DEGREE C)$', 100)
67          CALL BLSUR
68          XV0 = 12.0
69          YV0 =  8.0
70          ZV0 =  8.0
71          CALL VOLM3D(XV0, YV0, ZV0)
72          CALL VUABS (1200., 1600., 700.)
```

```
      CALL GRAF3D(XLOMIN, 2.0, XLOMAX, YLAMAX, -2.0, YLAMIN,
     &            ZMAX, -ZSTP, ZMIN)
C
C  DRAW WORKBOX OUTLINE IN ABSOLUTE WORKBOX UNITS
C
      CALL VECTR3(XVO, 0., ZVO, XVO, YVO, ZVO, 0020)
      CALL VECTR3(XVO, YVO, ZVO, 0., YVO, ZVO, 0020)
      CALL VECTR3(XVO, YVO, 0., XVO, YVO, ZVO, 0020)
C
C PLOT SURFACE OF CLOUD TOP TEMPERATURE IN 3 DIMENSIONS
C
      CALL BGNMAT(MAXSC, IPOS)
      DO 40 I = 1, MAXSC
         YLA = ((YLAMAX-YLAMIN)/MAXSC)*(I-1)+YLAMIN
      DO 50 J = 1, IPOS
         XLO = ((XLOMAX-XLOMIN)/IPOS)*(J-1)+XLOMIN
         ZM = FIELD(I, J)
      CALL GETMAT(XLO, YLA, ZM, 1, 0)
   50 CONTINUE
   40 CONTINUE
      CALL ENDMAT(FIELD, 0)
      CALL SURMAT(FIELD, 1, MAXSC, 1, IPOS, 0)
C
C  WRITE OUT MAX. AND MIN. TEMPERATURES IN A BOX
C
      CALL HEIGHT(0.08)
      CALL MIXALF('INSTRU')
      CALL MESSAG('MAX. TEMPERATURE = $',100,XSIZE-2.40,YSIZE-0.30)
      CALL REALNO(TEMMAX, 1, 'ABUT', 'ABUT')
      CALL MESSAG('(EH.5)O(EXHX) C$', 100, 'ABUT', 'ABUT')
      CALL MESSAG('MIN. TEMPERATURE = $',100,XSIZE-2.40,YSIZE-0.50)
      CALL REALNO(TEMMIN, 1, 'ABUT', 'ABUT')
      CALL MESSAG('(EH.5)O(EXHX) C$', 100, 'ABUT', 'ABUT')
      CALL BLREC(XSIZE-2.50, YSIZE-0.6, 2.40, 0.50, 0.02)
C
C  PLOT SUBPOT ON FLOOR OF WORKBOX
C
      CALL GRFITI(0., 0., 0., XVO, 0., 0., 0., YVO, 0.)
      CALL AREA2D(XVO, YVO)
      CALL GRAF(XLOMIN, 2.0, XLOMAX, YLAMAX, -2.0, YLAMIN)
      CALL GRID(1, 1)
      CALL END3GR(0)
C
C  PLOT SUBPLOT ON RIGHT SIDE WALL
C
      CALL GRFITI(0., 0., 0., 0., YVO, 0., 0., 0., ZVO)
      CALL AREA2D(YVO, ZVO)
      CALL GRAF(YLAMAX, -2.0, YLAMIN, ZMAX, -ZSTP, ZMIN)
      CALL GRID(1, 1)
      CALL END3GR(0)
C
C  PLOT SUBPLOT ON BACK WALL OF WORKBOX
C
      CALL GRFITI(0., 0., 0.,XVO, 0., 0., 0., 0., ZVO)
      CALL AREA2D(XVO, ZVO)
      CALL GRAF(XLOMIN, 2.0, XLOMAX, ZMAX, -ZSTP, ZMIN)
      CALL GRID(1, 1)
      CALL END3GR(0)
C
C TERMINATE PLOT
C
      CALL FRAME
      CALL DONEPL
   99 STOP
      END
$ENDFILE
$IF RC>4 $SOURCE PREVIOUS
```

APPENDIX D

INPUT AND OUTPUT EXAMPLES

```
1     *************** FILE BAT.READ ***************
2     $R *BATCH SCARDS=*SOURCE*
3     $SIG * PRIO=D 9TP=3 T=30 ROUTE=CNTR RETURN=TORY
4     MOUNT 009592 9TP *T1* WRITE=NO SIZE=32767 POSN=*8*
5     $R READ3.0 1=*T1*
6     Y
7     7327,1,5,98,81,3,
8     $TRUNCATE -3
9     $TRUNCATE -4
10    $TRUNCATE -7
11    $RENAME  -3 7327.IR
12    $RENAME -4 7327.OURED.I
13    $RENAME -7 7327.TELEM
```

```
1     *************** FILE BAT.SCAN8216 ***************
2     $R *BATCH SCARDS=*SOURCE*
3     $SIG * PRIO=D T=30 ROUTE=CNTR RETURN=TORY
4     $R SCAN3.0+=IMSLLIB 8=*SOURCE* 4=8216.IR 7=8216.TELEM 1=CITY T=20
5     1         590       980       237       591       10E6
6     8216      1986      07        17        1113
7     8185      16        01        52        0         18.28
8     102.0803  25.51     849.0     98.999    373.0
9     1         1         1         1         1
10    4         5         1
11    49        81        95        120
12    2         0.75      0.75
13    $TRUNCATE -6 OK
14    $TRUNCATE -9 OK
15    $TRUNCATE -10 OK
16    $TRUNCATE -11 OK
17    $TRUNCATE -13 OK
18    $TRUNCATE -16 OK
19    $RENAME -6 8216.OUT.IR
20    $RENAME -9 8216.WED=CAL
21    $RENAME -10 8216.WEDGE
22    $RENAME -11 8216.LATLON
23    $RENAME -13 8216.TEMP
24    $RENAME -16 8216.POST
```



```
1     ********** FILE 7299.OUT.IR **********
2
3     INFRARED INFORMATION FROM ORBIT  7299 OF SATELLITE NOAA-9 ON      MAY 13 1988
4     TIME OF FIRST SCAN 20:43: 7 Z
5
6     SATELLITE HEADING IS  NORTH
7     1101.0 SCANS PASSED SINCE SATELLITE LAST CROSSED EQUATOR
8     AT LONGITUDE  88.29 DEGREES WEST
9
10    REFERENCE ORBIT  7282
11
12    CROSSED EQUATOR AT LONGITUDE 345.38 DEGREES EAST     AT TIME 15:42:56 Z
13    ORBITAL PERIOD = 102.08121 MIN
14    LONGITUDNAL INCREMENT = 25.51 DEGREES TO WEST
15    HEIGHT OF SATELLITE AT EQUATOR =  885. KM     RADIUS OF EARTH = 6368. KM
16    ORBITAL INCLINATION =  99.00 DEG     SCANNING RATE =360. SCANS PER MINUTE
18    SCANNING BEGINS AT  830 AND ENDS AT  870
20    OUPUT TAKES UP 375 TO 801 OF AVAILABLE WIDTH
21    SATELLITE SUBPOINT PIXEL NUMBER = 373.00
22
23    DISTANCE BETWEEN SCANS = 3.31 KM
24    SCALING = 7.6737E+01 GRID UNITS PER INCH IN X DIRECTION
25    DISTANCE BETWEEN POINTS = 4.28 KM
26    SCALING = 5.9348E+01 GRID UNITS PER INCH IN Y DIRECTION
27    MAP SCALE = 1:10.00 MILLION
28
29          DATA FIELD PARAMETERS
30               SMOOTHING PARAMETERS
31    SMOOTHING OPERATION NUMBER  1     SMOOTHING PARAMETER =   0.75
32    MEAN OF FIELD DIFFERENCES  =   1.431
33    STANDARD DEVIATION         =   5.965
34    NUMBER OF SCANS IN WINDOW  =    241
35    SCAN LINES REJECTED DUE TO SYNCH PROBLEM =    0
36    SMOOTHING OPERATION NUMBER  2     SMOOTHING PARAMETER =   0.75
37               CALIBRATION PARAMETERS
38    CALIBRATION CURVATURE:      DATA LEVELS     TEMPERATURES (IN DEG K)
39
40                                  231.45              200.00
41                                  225.80              210.00
42                                  218.73              220.00
43                                  209.98              230.00
44                                  199.15              240.00
45                                  185.84              250.00
46                                  170.15              260.00
47                                  152.49              270.00
48                                  133.24              280.00
49                                  112.36              290.00
50                                   89.16              300.00
51
52    GRID DIMENSIONS : COLUMNS 1 TO  241     ROWS 1 TO  227
53    GRID SIZE = 54.71K ELEMENTS
54    EXTREME VALUES OF DATA FIELD
55     MINIMUM = -51.1     MAXIMUM =  28.8
56          LATITUDE-LONGITUDE PARAMETERS
57
58    LATITUDE LINES GENERATED EVERY  4.0 DEGREES    500 POINTS ALLOWED FOR EACH LINE
59    LONGITUDE LINES GENERATED EVERY  5.0 DEGREES    500 POINTS ALLOWED FOR EACH LINE
60              LATITUDE-LONGITUDE LINES OUTPUTTED TO UNIT 11
61
62       LATITUDE LINES
63     LATITUDE = 49.0 DEGREES NORTH     POINTS IN LATITUDE LINE =  13
64     LATITUDE = 53.0 DEGREES NORTH     POINTS IN LATITUDE LINE =  21
65     LATITUDE = 57.0 DEGREES NORTH     POINTS IN LATITUDE LINE =   3
66
67       LONGITUDE LINES
68     LONGITUDE = 240.0 DEGREES EAST     POINTS IN LONGITUDE LINE =  10
69     LONGITUDE = 245.0 DEGREES EAST     POINTS IN LONGITUDE LINE =  15
70     LONGITUDE = 250.0 DEGREES EAST     POINTS IN LONGITUDE LINE =  17
71     LONGITUDE = 255.0 DEGREES EAST     POINTS IN LONGITUDE LINE =  19
72          10 LATITUDE-LONGITUDE LINES OUTPUTTED TO UNIT 11
73    LAT LON LINES FORM BOX: COLUMNS -25. TO 277. ROWS -29. TO 258.
74          OUTLINE PARAMETERS
```

```
75
76              LAT-LON POINTS FROM UNIT  1
77        9 GRID COORDINATE POINTS OF OUTLINE TRANSFERRED TO UNIT 16
78      INPUTTED POINTS
79         53.55 246.53      52.27 246.20      51.05 245.92      49.70 247.22
80         50.05 249.33      52.88 241.92      51.17 244.43      52.12 253.37
81         50.42 255.35
82      GRID POINT POSITIONS OF OUTLINE TRANSFERRED TO UNIT 16
```

```
 1      ***** FILE 7298.WED-CAL *****
 2         22.04    0.0
 3         51.55   31.00
 4         81.44   63.00
 5        111.20   95.00
 6        140.63  127.00
 7        171.17  159.00
 8        201.57  191.00
 9        228.77  223.00
10        254.49  255.00
11      ***** DATA FOR CALIBRATION CURVES BEGIN *****
12        231.45  200.00
13        229.34  204.00
14        227.03  208.00
15        224.50  212.00
16        221.74  216.00
17        218.73  220.00
18        215.48  224.00
19        211.89  228.00
20        208.00  232.00
21        203.77  236.00
22        199.15  240.00
23        194.13  244.00
24        188.70  248.00
25        182.88  252.00
26        176.69  256.00
27        170.15  260.00
28        163.30  264.00
29        156.16  268.00
30        148.76  272.00
31        141.11  276.00
32        133.24  280.00
33        125.13  284.00
34        116.71  288.00
35        107.92  292.00
36         98.73  296.00
37         89.16  300.00
```

```
 1      ********** FILE 7313.WEDGE ***************
 2           TELEMETRY WEDGE LEVELS FOR ORBIT NUMBER 7313
 3        WEDGE NUMBER  1     MEAN  50.84     STD DEVIATION    0.71
 4        WEDGE NUMBER  2     MEAN  81.44     STD DEVIATION    0.60
 5        WEDGE NUMBER  3     MEAN 112.12     STD DEVIATION    0.36
 6        WEDGE NUMBER  4     MEAN 141.99     STD DEVIATION    0.69
 7        WEDGE NUMBER  5     MEAN 171.49     STD DEVIATION    0.94
 8        WEDGE NUMBER  6     MEAN 202.01     STD DEVIATION    1.08
 9        WEDGE NUMBER  7     MEAN 229.14     STD DEVIATION    1.18
10        WEDGE NUMBER  8     MEAN 254.15     STD DEVIATION    0.93
11        WEDGE NUMBER  9     MEAN  22.08     STD DEVIATION    0.72
12        WEDGE NUMBER 10     MEAN  92.10     STD DEVIATION    0.60
13        WEDGE NUMBER 11     MEAN  92.84     STD DEVIATION    0.42
14        WEDGE NUMBER 12     MEAN  92.09     STD DEVIATION    0.39
15        WEDGE NUMBER 13     MEAN  93.91     STD DEVIATION    0.70
16        WEDGE NUMBER 14     MEAN 132.20     STD DEVIATION    0.78
17        WEDGE NUMBER 15     MEAN 107.31     STD DEVIATION    0.53
18        WEDGE NUMBER 16     MEAN 142.67     STD DEVIATION    0.77
```